EVQ2177-LE-00A

5.5V, 1A, 2.4MHz, Synchronous Step-Down Converter with PG and SS Evaluation Board, AEC-Q100 Qualified

DESCRIPTION

The EVQ2177-LE-00A is an evaluation board designed to demonstrate the capabilities of the MPQ2177, a monolithic, step-down switch-mode converter with integrated internal power MOSFETs.

The EVQ2177-LE-00A achieves 1A of continuous output current (I_{OUT}) across a 2.5V to 5.5V input voltage (V_{IN}) range, with excellent load and line regulation. The output voltage (V_{OUT}) can be regulated to as low as 0.6V. Fault protections include cycle-by-cycle current limiting and thermal shutdown.

The EVQ2177-LE-00A is a fully assembled and tested evaluation board. It generates a 1.2V V_{OUT} at load currents up to 1A across a 2.5V to 5.5V V_{IN} range.

The MPQ2177 is available in a compact QFN-8 (1.5mmx2mm) package.

ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Value	Units
Input voltage	V_{IN}	2.5 to 5.5	V
Output voltage	V_{OUT}	1.2	V
Output current	I_{OUT}	1	A

FEATURES

- **Designed for Automotive Applications:**
  - Wide 2.5V to 5.5V Operating Input Voltage (V_{IN}) Range
  - Up to 1A Output Current
  - 1% Feedback (FB) Accuracy
- **High Performance for Improved Thermals:**
  - 75mΩ and 45mΩ Integrated Internal Power MOSFETs
- **Optimized for EMC and EMI:**
  - 2.4MHz Switching Frequency (f_{SW})
  - Forced Continuous Conduction Mode (CCM) across the Full Load Range
- **Optimized for Board Size and BOM:**
  - Integrated Compensation Network
  - Available in a Compact QFN-8 (1.5mmx2mm) Package
  - Available in AEC-Q100 Grade 1
- **Additional Features:**
  - Power Good (PG)
  - External Soft-Start (SS) Control
  - Output Discharge
  - Over-Voltage Protection (OVP) and Short-Circuit Protection (SCP) with Hiccup Mode


APPLICATIONS

- Automotive Clusters, Telematics, and Infotainment Systems
- Camera Modules
- Key Fobs
- Industrial Supplies
- Battery-Powered Devices

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. “MPS”, the MPS logo, and “Simple, Easy Solutions” are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVQ2177-LE-00A EVALUTION BOARD

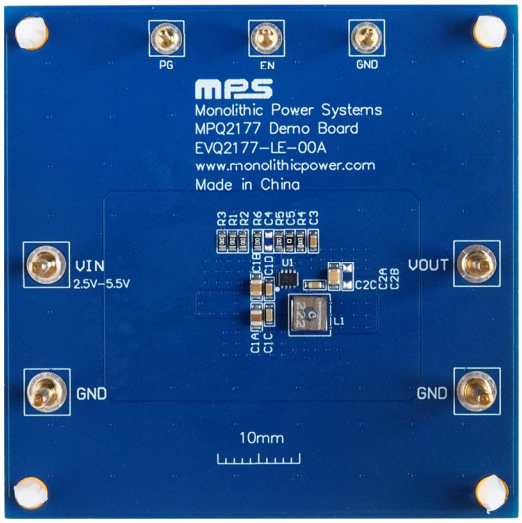


LxWxH (6.3cmx6.3cmx0.3cm)

Board Number	MPS IC Number
EVQ2177-LE-00A	MPQ2177GQHE-AEC1

Efficiency vs. Load Current vs. Power Loss

V_{OUT} = 1.2V, L = 2.2µH,
(XFL4020-222MEB, DCR = 21.35mΩ)

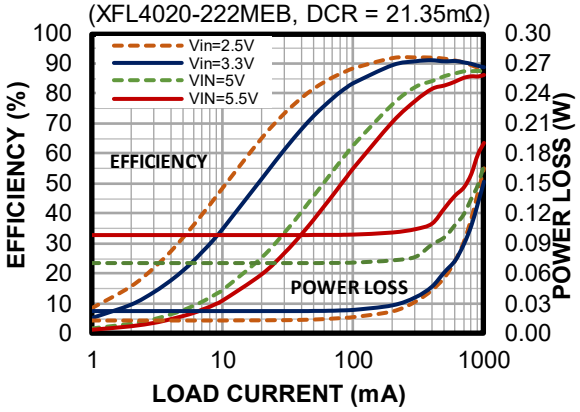

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

QUICK START GUIDE

1. Preset the power supply between 2.5V and 5.5V.
2. Connect the power supply terminals to:
   a. Positive (+): VIN
   b. Negative (-): GND
3. Connect the load terminals to:
   a. Positive (+): VOUT
   b. Negative (-): GND
4. After making connections, turn on the power supply.
5. To use the enable function, apply a digital input to the EN pin. Drive EN above 0.9V to turn the regulator on; drive EN below 0.65V to turn it off.
6. The external resistor divider sets the output voltage (V_{OUT}). To adjust the MPQ2177's output, set the feedback resistor (R5) to be between 10kΩ and 100kΩ. R6 can then be calculated using Equation (1):

$$R6 = \frac{R5}{\frac{V_{OUT}}{0.6} - 1} \quad (1)$$


Table 1 shows the recommended resistor values for common output voltages.

Table 1: Resistor Values for Common Output Voltages

V_{OUT} (V)	R5 (kΩ)	R6 (kΩ)
1.0	30.9 (1%)	47 (1%)
1.2	100 (1%)	100 (1%)
1.8	36 (1%)	18 (1%)
2.5	51 (1%)	16 (1%)
3.3	68 (1%)	15 (1%)

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVALUATION BOARD SCHEMATIC

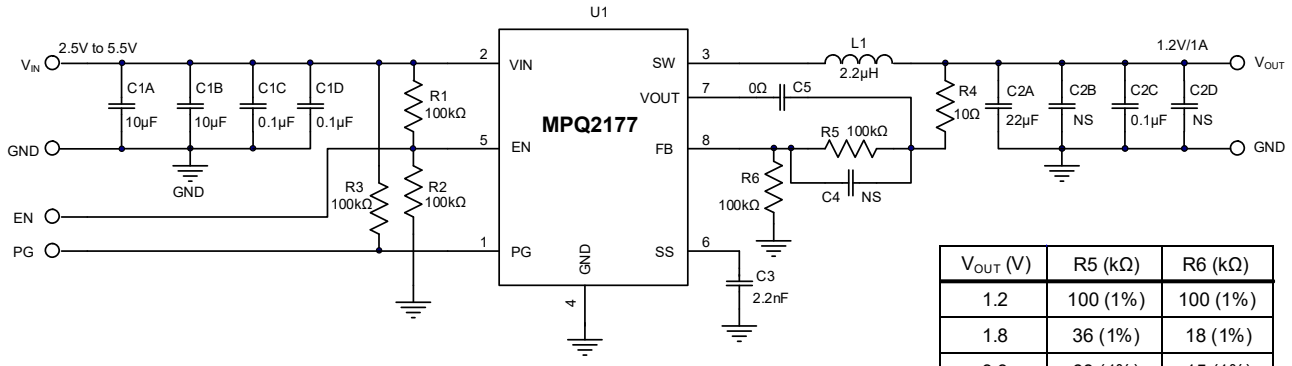

V_{OUT} (V)	R5 (kΩ)	R6 (kΩ)
1.2	100 (1%)	100 (1%)
1.8	36 (1%)	18 (1%)
3.3	68 (1%)	15 (1%)

Figure 1: Evaluation Board Schematic

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVQ2177-LE-00A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
1	CIN1	22µF	Electrolytic capacitor, 63V	SMD	Jianghai	VTD-63V22
2	C1A, C1B	4.7µF	Ceramic capacitor, 16V, X7R	0805	Murata	GCM21BR71C475KA73L
3	C1C, C1D, C2C	0.1µF	Ceramic capacitor, 16V, X7R	0603	TDK	C1608X7R1C104K
1	C2A	22µF	Ceramic capacitor, 6.3V, X5R	0805	Murata	GRM21BR60J226ME39L
1	C5	0Ω	Film resistor, 1%	0603	Yageo	RC0603FR-070RL
0	C4	NS				
1	C3	2.2nF	Ceramic capacitor, 50V, X7R	0603	TDK	C1608X7R1H222K
5	R1, R2, R3, R5, R6	100kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-07100KL
1	R4	10Ω	Film resistor, 1%	0603	Yageo	RC0603FR-0710RL
1	L1	2.2µH	Inductor, R_{DC} = 21.35mΩ, I_{SAT} = 3.7A	SMD	Coilcraft	XFL4020-222MEB
4	VIN, GND, VOUT, GND	Test point	2.0 golden pin	DIP	Custom	
3	EN, PG, GND	Test point	1.0 golden pin	DIP	Custom	
1	U1	MPQ2177 -AEC1	5.5V, 1A, step-down converter, AEC-Q100 qualified	QFN-8 (1.5mmx 2mm)	MPS	MPQ2177GQHE-AEC1


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVB TEST RESULTS

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 3.6V, V_{OUT} = 1.2V, L = 2.2µH, C_{OUT} = 22µF, T_A = 25°C, unless otherwise noted.


Efficiency vs. Load Current vs. Power Loss

V_{OUT} = 1.2V, L = 2.2µH,
(XFL4020-222MEB, DCR = 21.35mΩ)

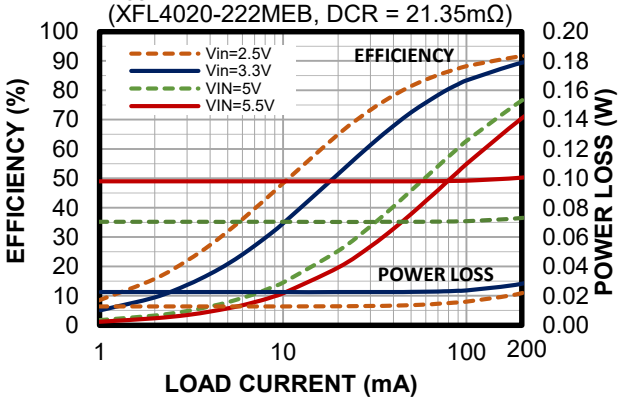


Efficiency vs. Load Current vs. Power Loss

V_{OUT} = 1.2V, L = 2.2µH,
(XFL4020-222MEB, DCR = 21.35mΩ)

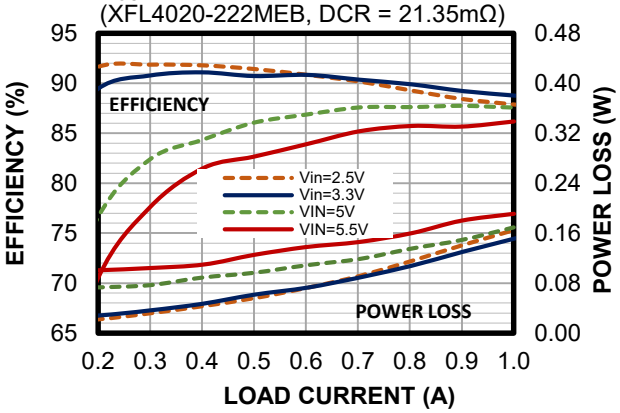


Efficiency vs. Load Current vs. Power Loss

V_{OUT} = 1.8V, L = 2.2µH,
(XFL4020-222MEB, DCR = 21.35mΩ)

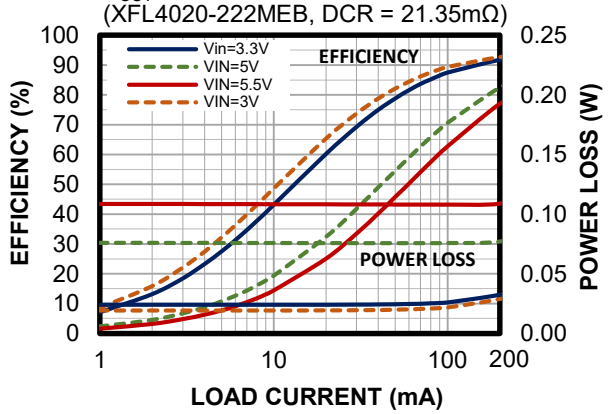


Efficiency vs. Load Current vs. Power Loss

V_{OUT} = 1.8V, L = 2.2µH,
(XFL4020-222MEB, DCR = 21.35mΩ)

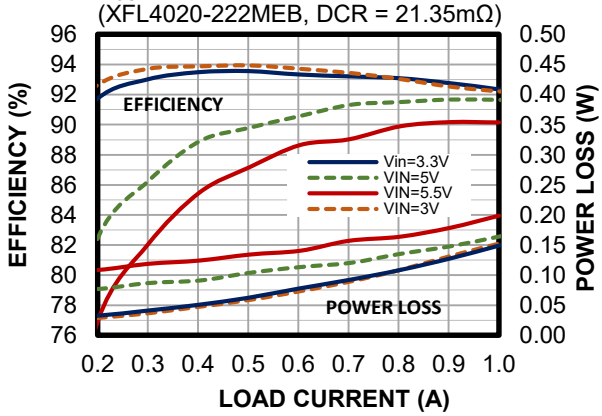


Load Regulation

V_{OUT} = 1.8V

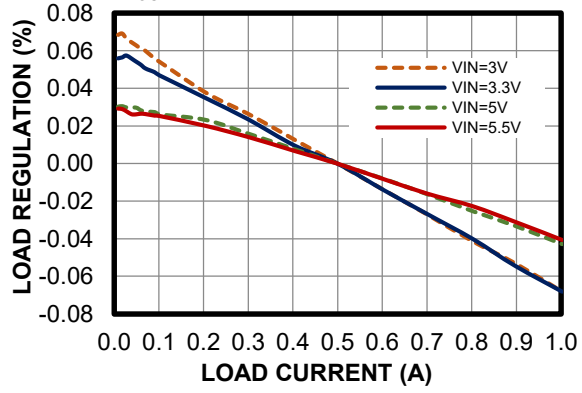

Load Regulation

V_{OUT} = 1.2V

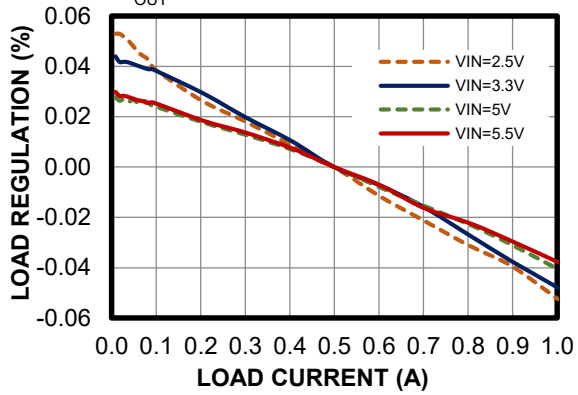


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 3.6V, V_{OUT} = 1.2V, L = 2.2µH, C_{OUT} = 22µF, T_A = 25°C, unless otherwise noted.


Line Regulation

V_{OUT} = 1.2V

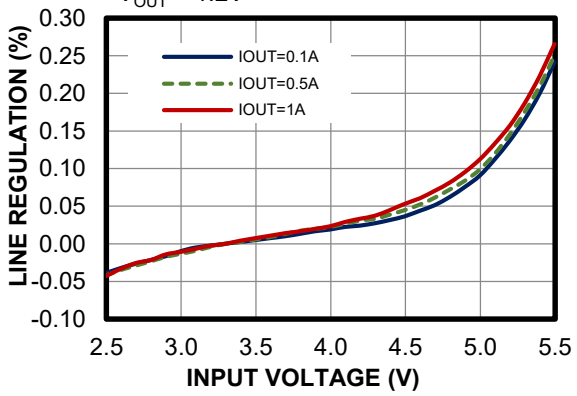

Line Regulation

V_{OUT} = 1.8V

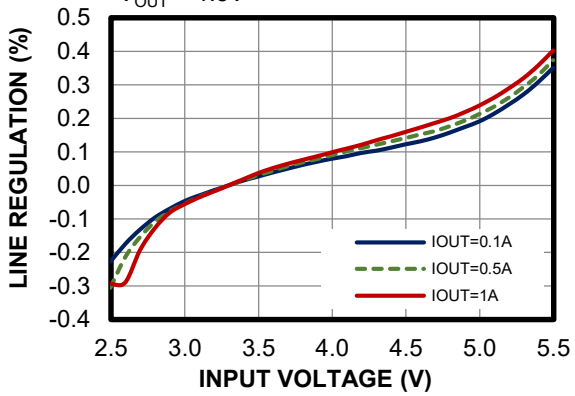


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 3.6V, V_{OUT} = 1.2V, L = 2.2µH, C_{OUT} = 22µF, T_A = 25°C, unless otherwise noted.


Steady State

I_{OUT} = 0A

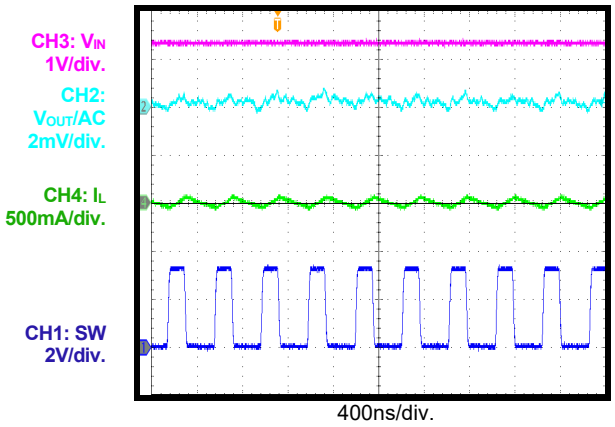


Steady State

I_{OUT} = 1A

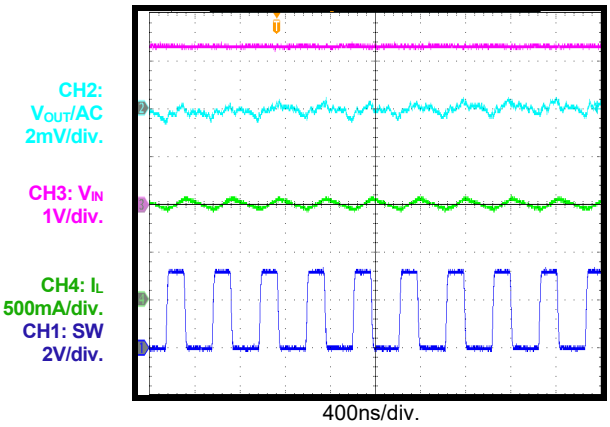


Start-Up through VIN

I_{OUT} = 0A

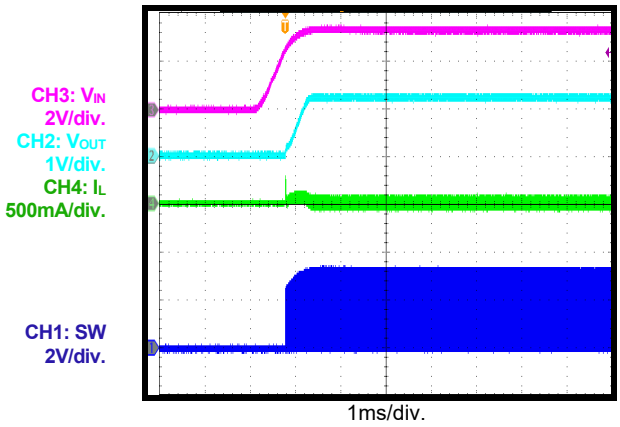


Start-Up through VIN

I_{OUT} = 1A

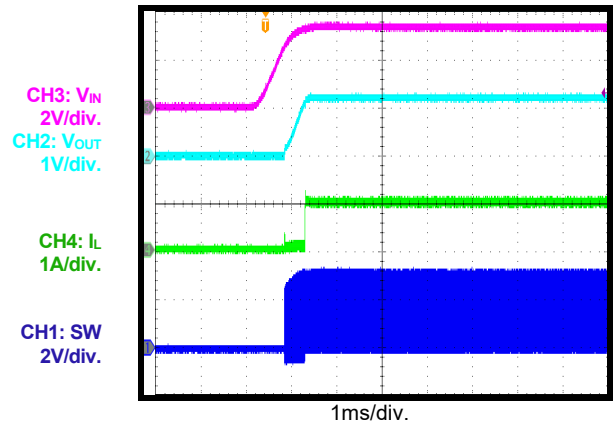


Shutdown through VIN

I_{OUT} = 0A

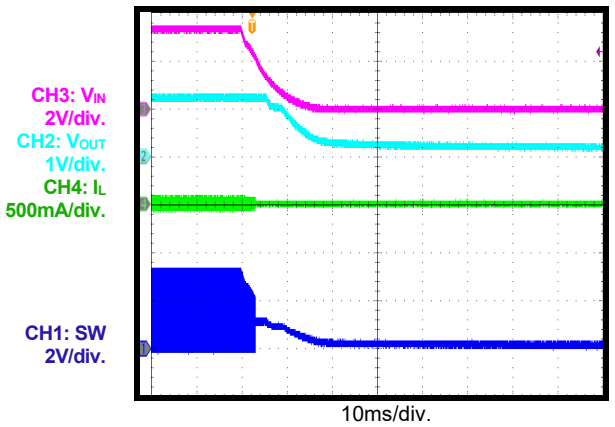

Shutdown through VIN

I_{OUT} = 1A

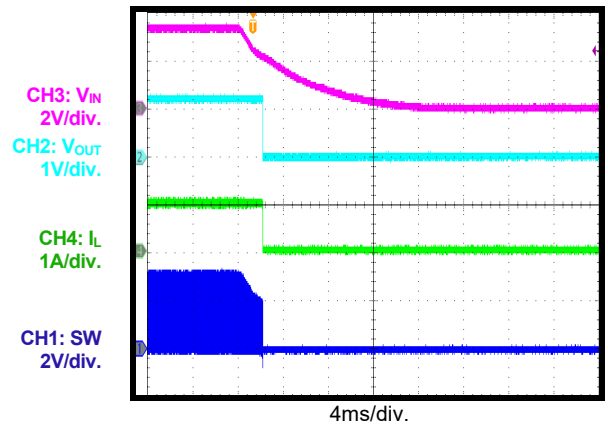


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 3.6V, V_{OUT} = 1.2V, L = 2.2µH, C_{OUT} = 22µF, T_A = 25°C, unless otherwise noted.


Start-Up through EN

I_{OUT} = 0A

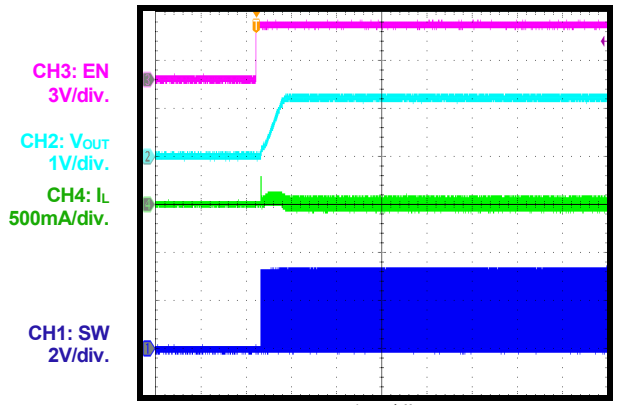


Start-Up through EN

I_{OUT} = 1A

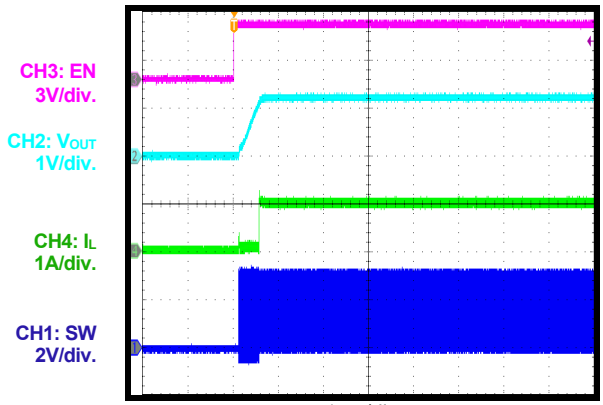


Shutdown through EN

I_{OUT} = 0A

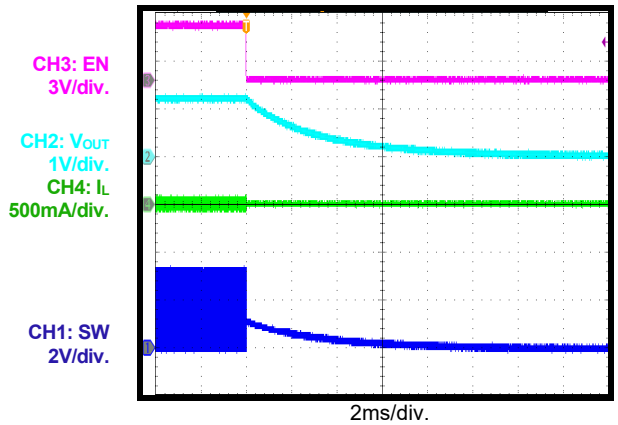


Shutdown through EN

I_{OUT} = 1A

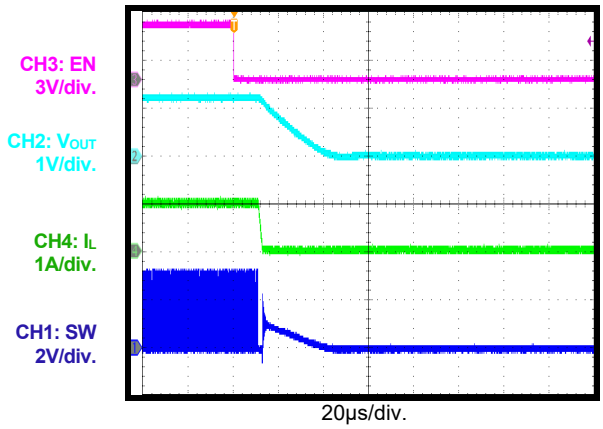


SCP Entry

I_{OUT} = 0A

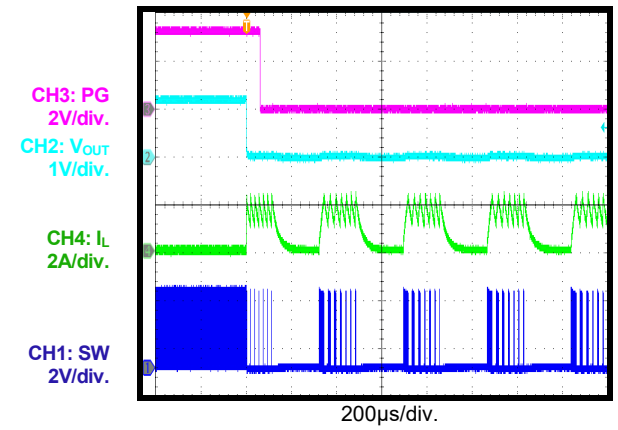

SCP Entry

I_{OUT} = 1A

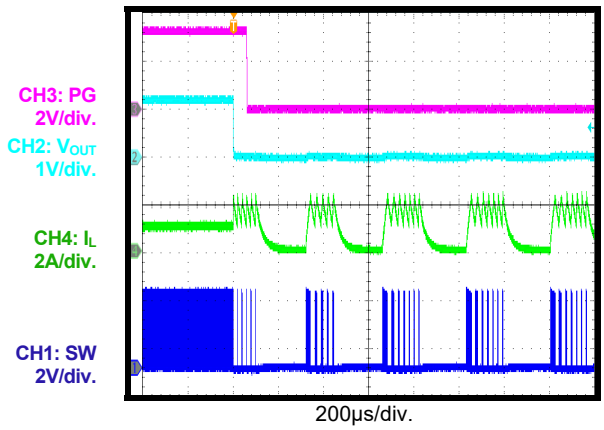


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.


EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 3.6V, V_{OUT} = 1.2V, L = 2.2µH, C_{OUT} = 22µF, T_A = 25°C, unless otherwise noted.


SCP Recovery
I_{OUT} = 0A

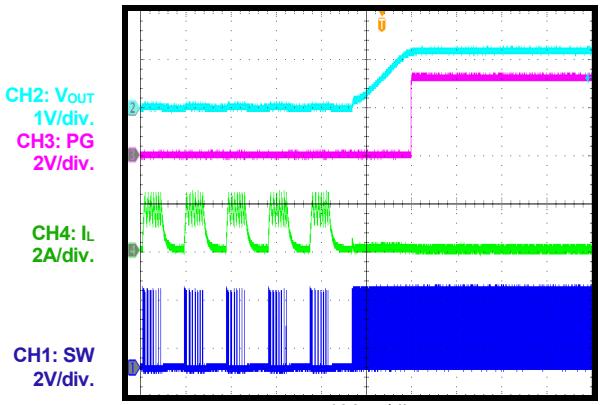


SCP Recovery
I_{OUT} = 1A

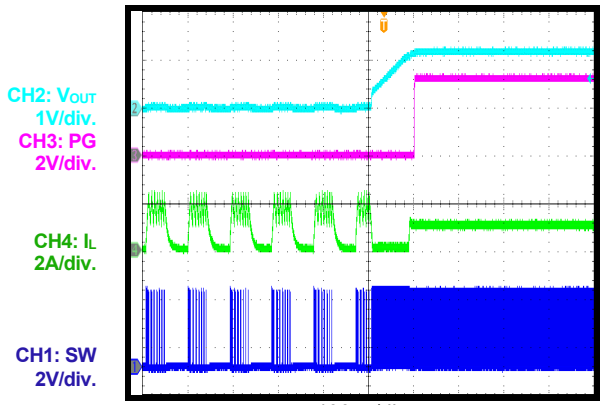


Short Circuit

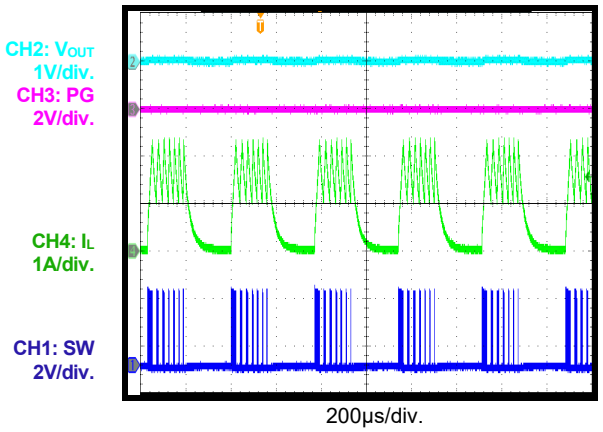


PG in Start-Up through VIN
I_{OUT} = 1A

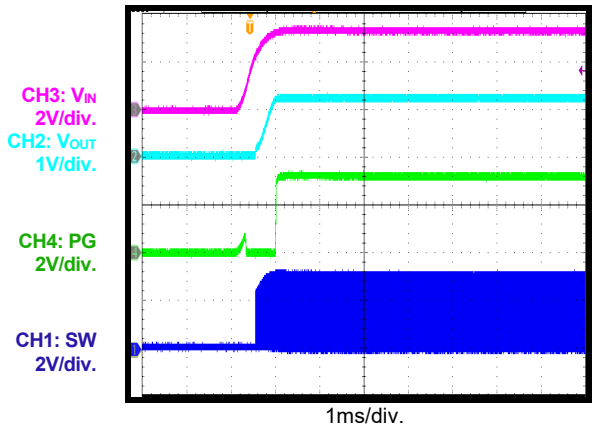

PG in Shutdown through VIN
I_{OUT} = 1A

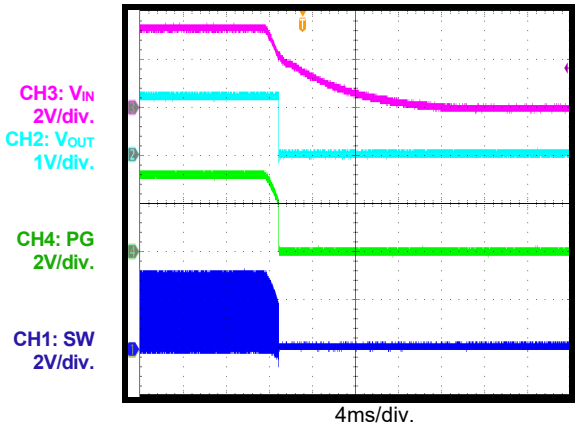

PG in Start-Up through EN
I_{OUT} = 1A

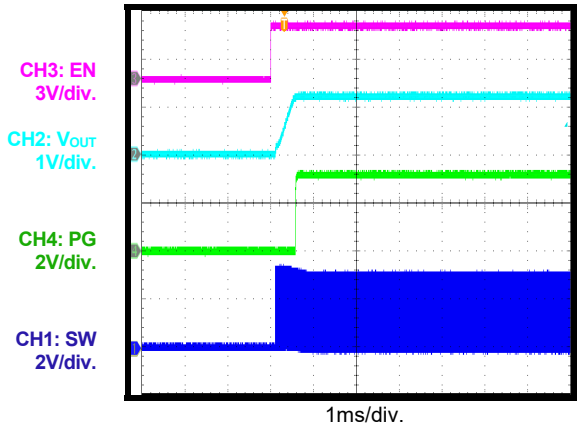


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 3.6V, V_{OUT} = 1.2V, L = 2.2µH, C_{OUT} = 22µF, T_A = 25°C, unless otherwise noted.


PG in Shutdown through EN

I_{OUT} = 1A

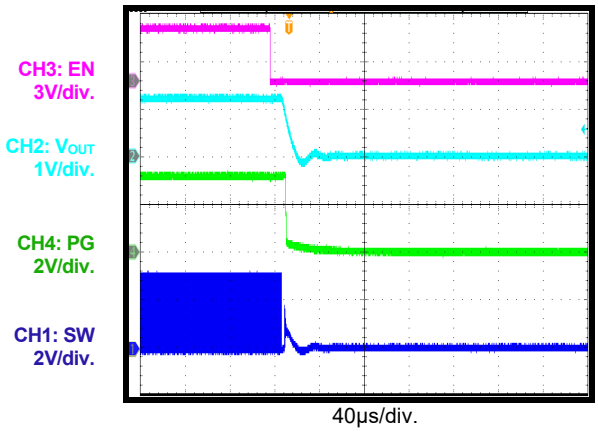

Load Transient

I_{OUT} = 0.5A to 1A, 1A/µs

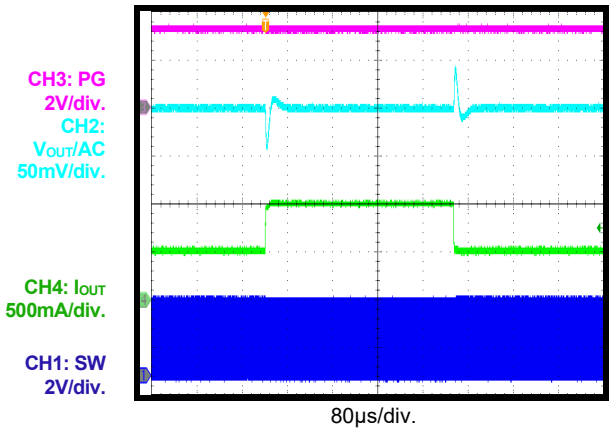

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

PCB LAYOUT

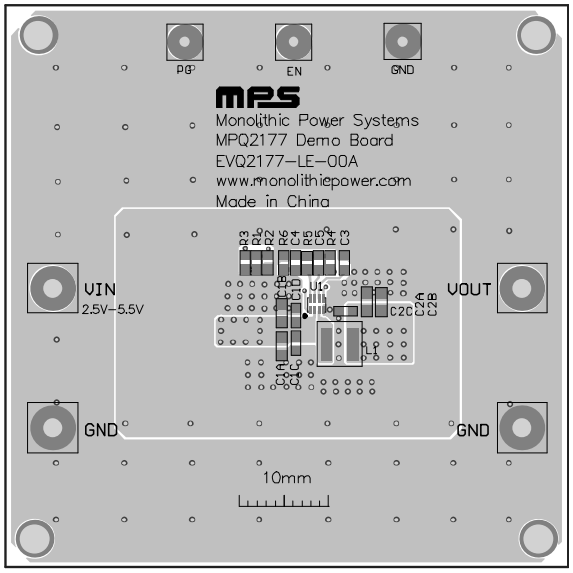


Figure 2: Top Silk and Top Layer

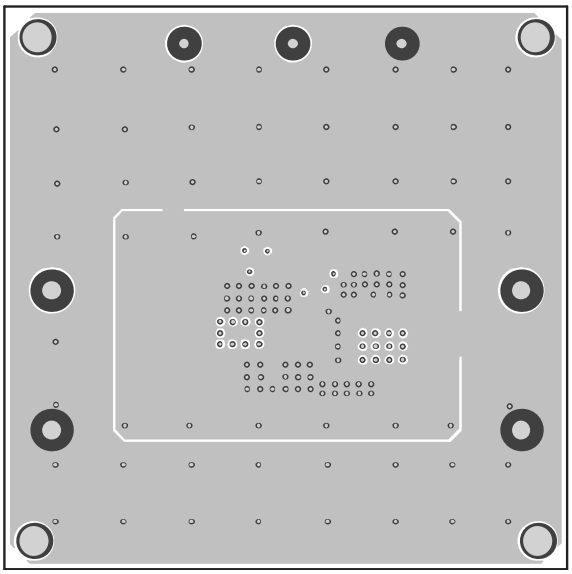


Figure 3: Mid-Layer 1

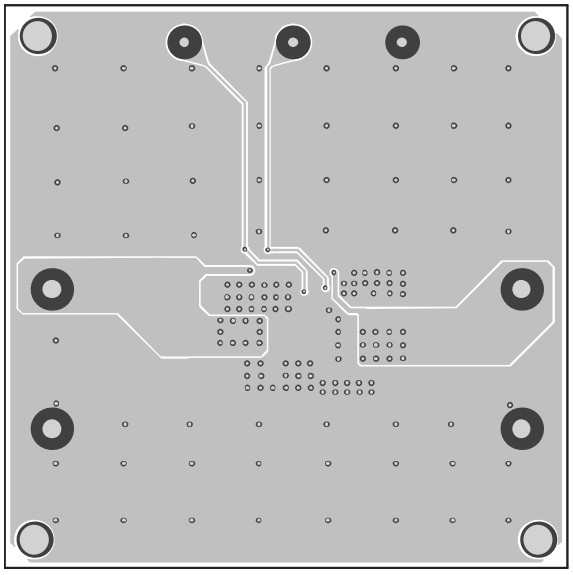


Figure 4: Mid-Layer 2

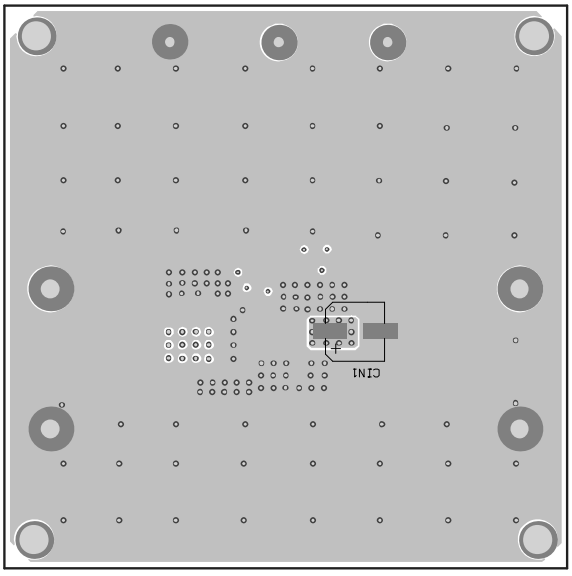


Figure 5: Bottom Layer and Bottom Silk

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.

REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	09/29/2021	Initial Release	-

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2021 MPS. All Rights Reserved.