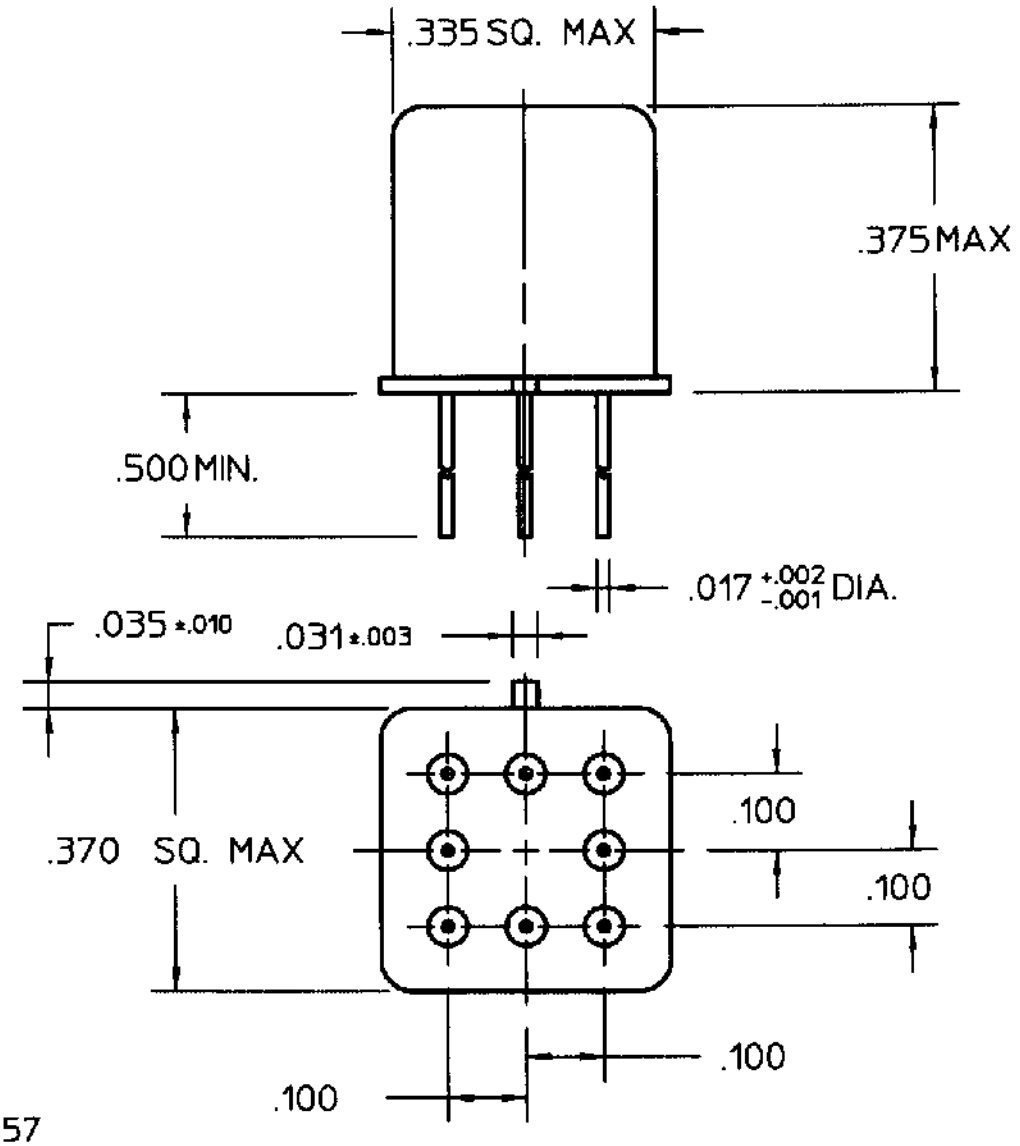


REV. 0
DCO 140857

COIL: @ 25°C

RESISTANCE	3200 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.0 VDC
MUST RELEASE	8.0 VDC MAX. 1.4 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX
RELEASE TIME 2.5 MS MAX
CONTACT STABILIZATION TIME 2.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN

DR. R.B. 1/19/99 CK. ERB 1/20/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/41-036M

TYPE JMGS RELAY

JMGSC-26M