EVQ4323M-G-00A

36V, 3A, Low-I_Q, Synchronous Step-Down Converter in a QFN-12L Package Evaluation Board, AEC-Q100 Qualified

DESCRIPTION

The EVQ4323M-G-00A evaluation board is designed to demonstrate the capabilities of the MPQ4323M, a configurable-frequency (350kHz to 2.5MHz), synchronous, step-down switching regulator with integrated, internal high-side MOSFETs (HS-FETs) and low-side MOSFETs (LS-FETs).

The MPQ4323M provides 3A of highly efficient output current (I_{OUT}) with peak current control mode. The wide 3.3V to 36V input voltage (V_{IN}) range and 42V load dump tolerance accommodates a variety of step-down applications in automotive input environments. A 1µA quiescent current (I_Q) in shutdown mode allows the device to be used in battery-powered applications.

High power conversion efficiency across a wide load range is achieved by scaling down the switching frequency (f_{SW}) under light-load conditions to reduce the switching and gate driver losses.

An open-drain power good (PG) signal indicates whether the output is within 94.5% to 105.5% of its nominal voltage.

Frequency foldback helps prevent inductor current (I_L) runaway during start-up. Thermal shutdown provides reliable, fault-tolerant operation. A high duty cycle and low-dropout (LDO) mode are provided for automotive cold-crank conditions.

The EVQ4323M-G-00A is fully assembled and tested. The MPQ4323M is available in a QFN-12L (3.5mmx3.5mm) package with wettable flanks. It is available in AEC-Q100 Grade 1.

PERFORMANCE SUMMARY

Specifications are at T_A = 25°C, unless otherwise noted.

Parameters	Conditions	Value
Input voltage (V_{IN}) range		3.3V to 36V
Output voltage (V_{OUT})	V_{IN} = 6V to 36V, I_{OUT} = 0A to 3A	V_{OUT} = 5V
Maximum output current (I_{OUT})	V_{IN} = 3.3V to 36V	3A
Typical efficiency	V_{IN} = 12V, V_{OUT} = 5V, I_{OUT} = 3A	92.7%
Peak efficiency	V_{IN} = 8V, V_{OUT} = 5V, I_{OUT} = 1A	95.6%
Switching frequency (f_{SW})		2.2MHz

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVQ4323M-G-00A EVALUATION BOARD



LxWxH (8.3cmx8.3cmx1cm)

Board Number	MPS IC Number
EVQ4323M-G-00A	MPQ4323MGQCE-AEC1

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

QUICK START GUIDE

The EVQ4323M-G-00A evaluation board is easy to set up and use to evaluate the MPQ4323M's performance. For proper measurement equipment set-up, refer to Figure 2 on page 4 and follow the steps below:

1. Preset the power supply between 6V and 36V, then turn off the power supply.
2. Set the load current between 0A and 3A. Electronic loads represent a negative impedance to the regulator, and setting a current too high may trigger hiccup mode.
3. If longer cables are used between the source and the evaluation board (>0.5m total), place a damping capacitor at the input terminals, especially when V_{IN} ≥ 24V.
4. Connect the power supply terminals to:
   a. Positive (+): VEMI
   b. Negative (-): GND
5. Connect the load terminals to:
   a. Positive (+): VOUT
   b. Negative (-): GND
6. After making the connections, turn on the power supply.
7. To use the enable function, apply a digital input to the EN pin. Drive EN above 1.02V to turn the regulator on; drive EN below 0.85V to turn the regulator off. If the enable function is not used, EN can be connected directly to VIN.
8. Connect a resistor between the FREQ and GND pins to set the internal switching frequency (f_{SW}).
9. The external resistor divider sets the output voltage (V_{OUT}) (see Figure 1).

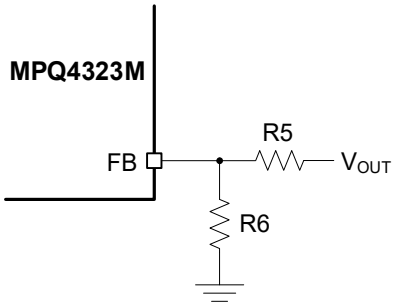


Figure 1: Feedback Divider Network with Adjustable Output

R5 is selected to be 100kΩ. R6 can then be calculated using Equation (1):

$$R6=\frac{R5}{\frac{V_{OUT}}{0.8V}-1} \quad (1)$$

Refer to the Application Information section in the MPQ4323M datasheet to calculate the inductance and output capacitance for different V_{OUT} values.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.


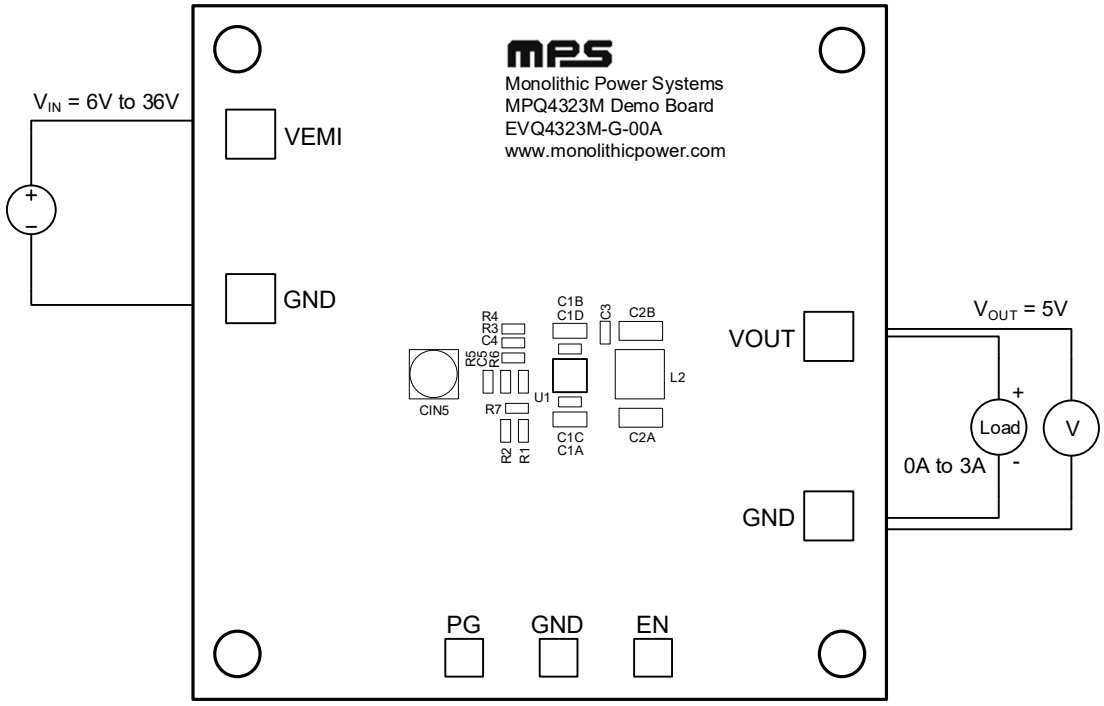


Figure 2: Measurement Equipment Set-Up

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVALUATION BOARD SCHEMATIC

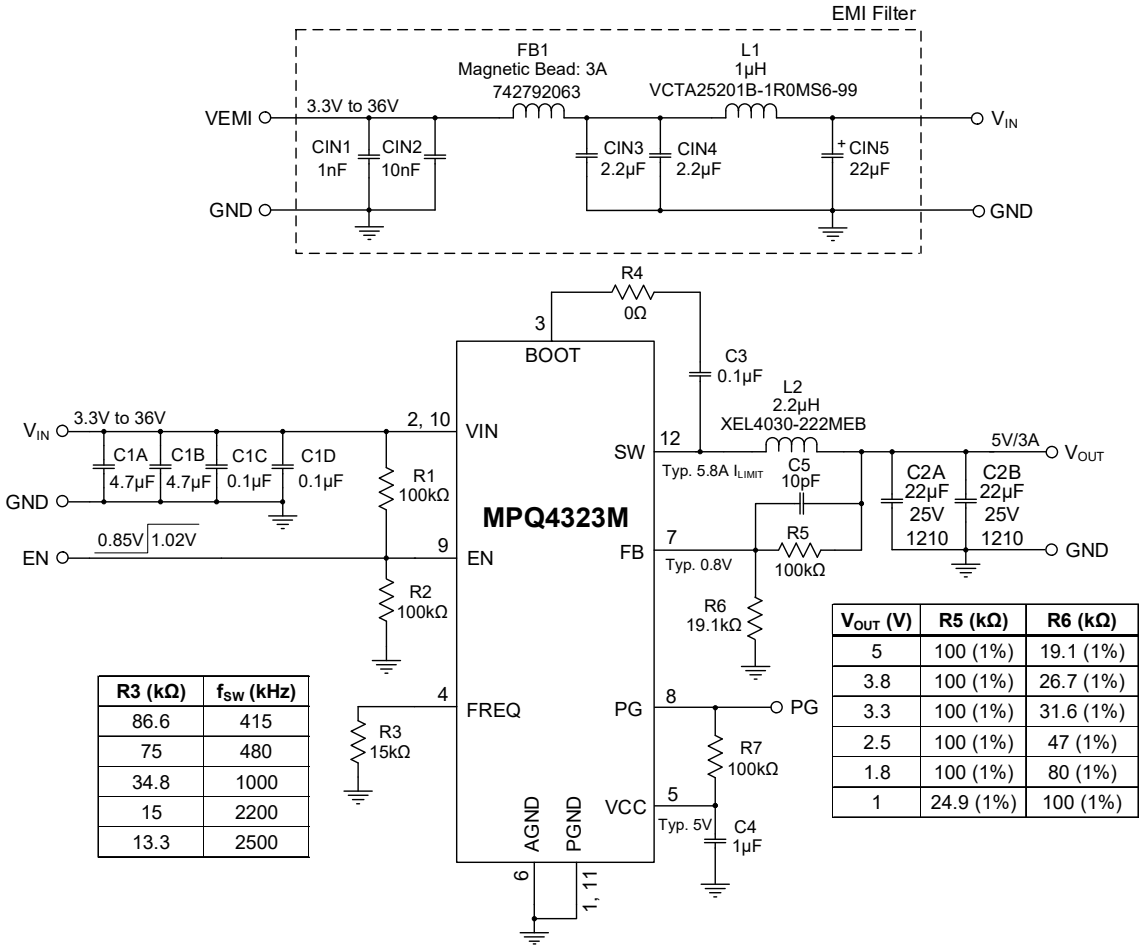


R3 (kΩ)	f_{SW} (kHz)
86.6	415
75	480
34.8	1000
15	2200
13.3	2500

V_{OUT} (V)	R5 (kΩ)	R6 (kΩ)
5	100 (1%)	19.1 (1%)
3.8	100 (1%)	26.7 (1%)
3.3	100 (1%)	31.6 (1%)
2.5	100 (1%)	47 (1%)
1.8	100 (1%)	80 (1%)
1	24.9 (1%)	100 (1%)

Figure 3: Evaluation Board Schematic

PACKAGE REFERENCE

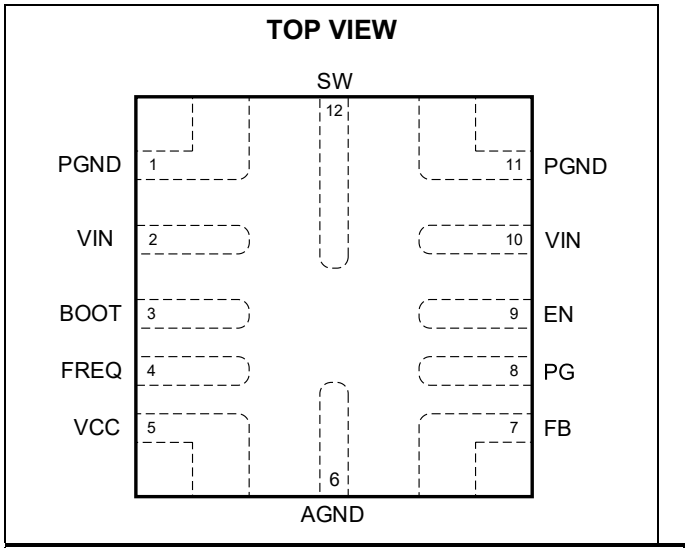

QFN-12L (3.5mmx3.5mm)

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVQ4323M-G-00A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
1	CIN1	1nF	Ceramic capacitor, 50V, X7R	0603	Murata	GRM216R71H102KA01
1	CIN2	10nF	Ceramic capacitor, 50V, X7R	0603	Murata	GRM188R71H103KA01D
2	CIN3, CIN4	2.2µF	Ceramic capacitor, 50V, X7R	0805	TDK	CGA4J3X7R1H225KT000N
1	CIN5	22µF	Aluminum polymer capacitor, 50V	SMD	Panasonic	EEHZC1H220P
2	C1A, C1B	4.7µF	Ceramic capacitor, 50V, X7S	1206	Murata	GRM31CR71H475KA12L
3	C1C, C1D, C3	100nF	Ceramic capacitor, 50V, X7R	0603	Murata	GRM188R71H104KA93D
2	C2A, C2B	22µF	Ceramic capacitor, 25V, X7R	1210	Murata	GRM32ER71E226KE15L
1	C5	10pF	Ceramic capacitor, 50V, NP0	0603	Wurth	885012006051
1	C4	1µF	Ceramic capacitor, 25V, X7R	0603	Murata	GCM188R71E105KA64D
1	FB1	3A	Magnetic bead	0805	Wurth	742792063
1	L1	1uH	Inductor, 35mΩ, 3.8A	SMD	Cyntec	VCTA25201B-1R0MS6-99
1	L2	2.2µH	Inductor, 22.1mΩ, 5.8A	SMD	Coilcraft	XEL4030-222MEB
4	R1, R5, R7, R2	100kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-07100KL
1	R6	19.1kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-0719K1L
1	R3	15kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-0715KL
1	R4	0Ω	Film resistor, 5%	0603	Yageo	RC0603JR-070RL
1	U1	MPQ4323M	3A, low-I_Q, sync step-down converter, AEC-Q100	QFN-12L (3.5mmx 3.5mm)	MPS	MPQ4323MGQCE-AEC1


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, T_A = 25°C, unless otherwise noted.


Input Current vs. Load Current

R_{FB1} = 100kΩ, R_{FB2} = 19.1kΩ,
DCR = 22.1mΩ

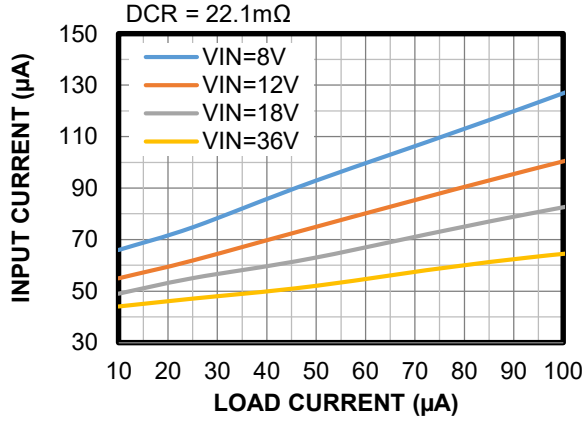


Efficiency vs. Load Current

R_{FB1} = 100kΩ, R_{FB2} = 19.1kΩ,
DCR = 22.1mΩ

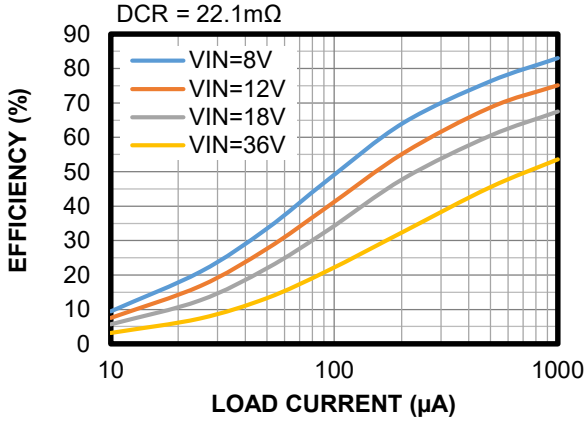


Efficiency vs. Load Current

DCR = 22.1mΩ

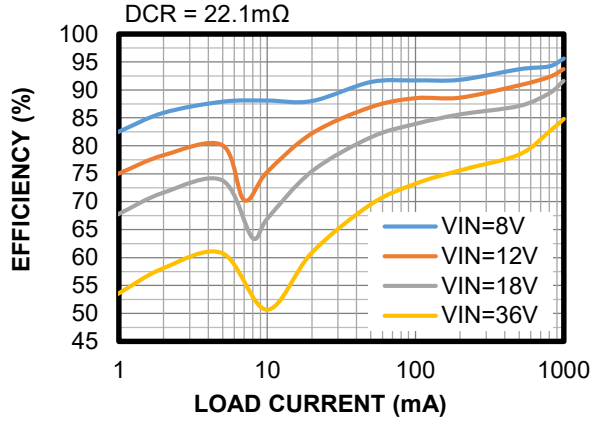


Efficiency vs. Load Current

DCR = 22.1mΩ

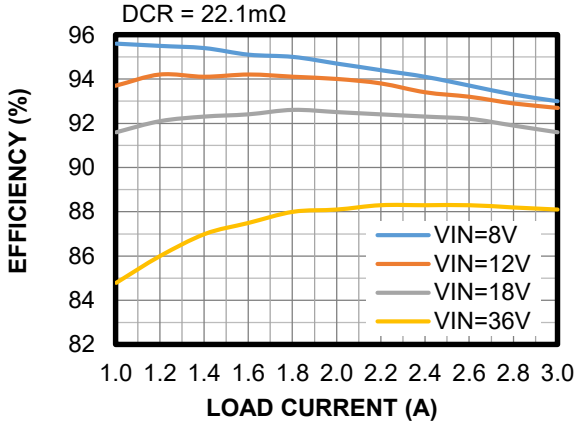


Load Regulation

DCR = 22.1mΩ

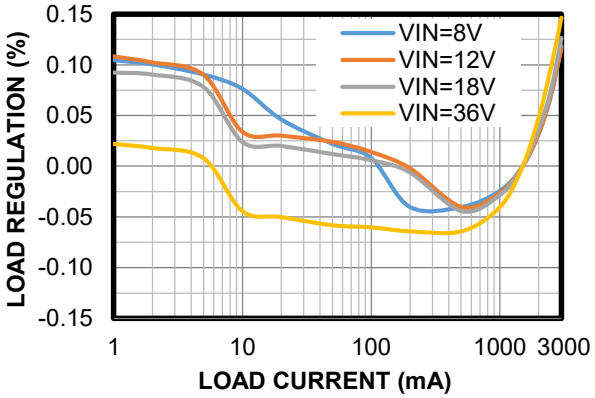

Line Regulation

DCR = 22.1mΩ

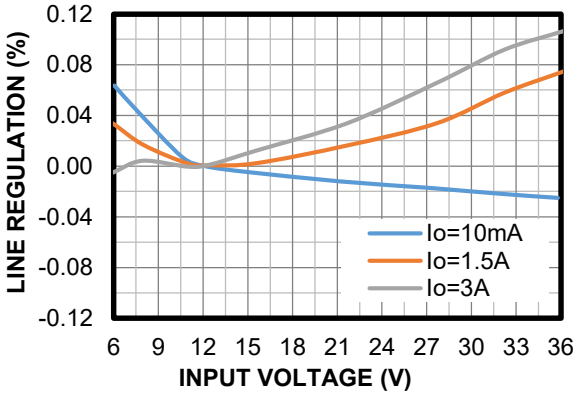


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, T_A = 25°C, unless otherwise noted.


Case Temperature Rise

V_{OUT} = 5V, f_{SW} = 2.2MHz

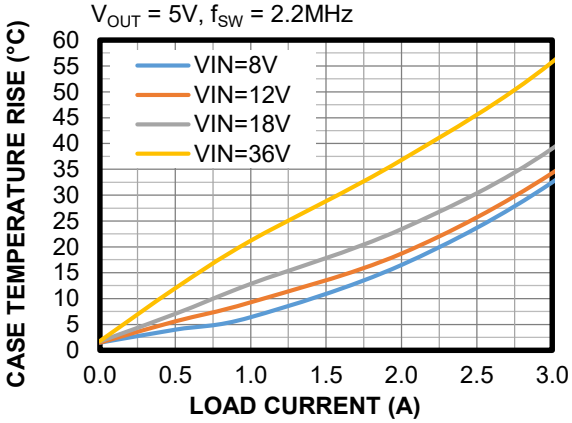


Low-Dropout Mode

V_{OUT} = 5V, f_{SW} = 2.2MHz

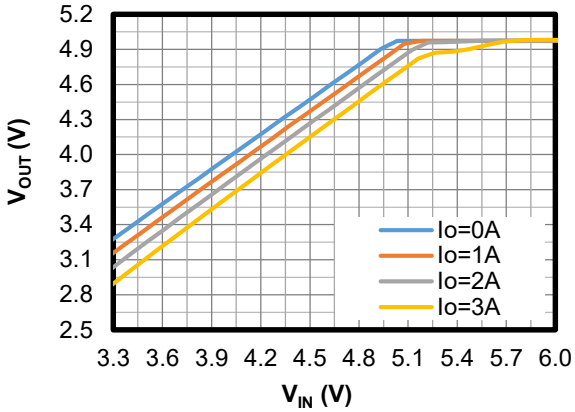


f_{SW} vs. R_{FREQ}

R_{FREQ} = 10kΩ to 30kΩ

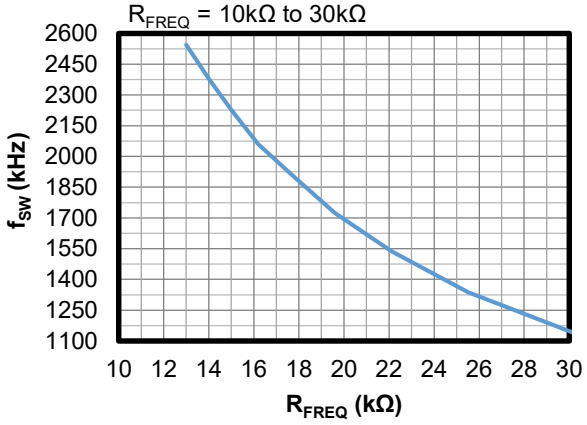


f_{SW} vs. R_{FREQ}

R_{FREQ} = 30kΩ to 60kΩ

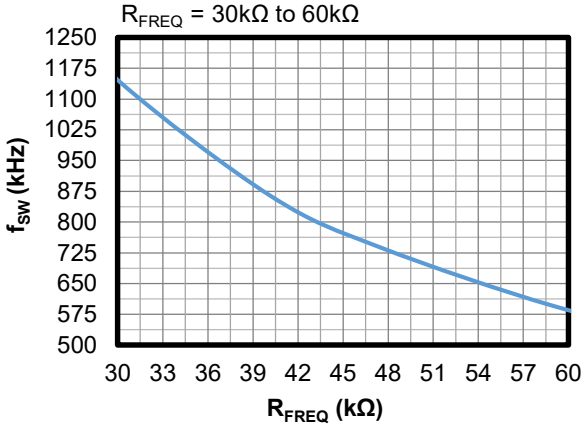

f_{SW} vs. R_{FREQ}

R_{FREQ} = 60kΩ to 100kΩ

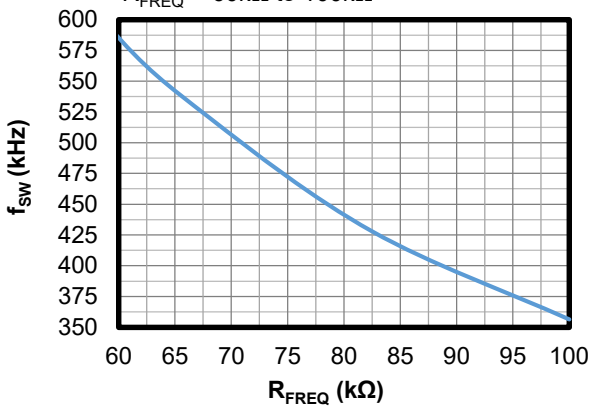


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, T_A = 25°C, unless otherwise noted.


Thermal Performance

I_{OUT} = 1.5A, no forced airflow, T_{CASE} = 38.2°C

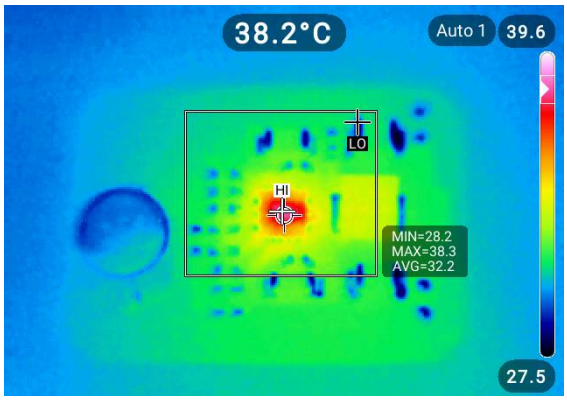

Thermal Performance

I_{OUT} = 3A, no forced airflow, T_{CASE} = 59.5°C

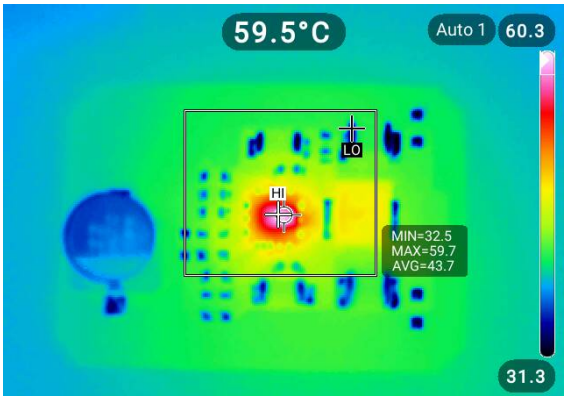


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, T_A = 25°C, unless otherwise noted.


CISPR25 Class 5 Peak Conducted Emissions

150kHz to 108MHz

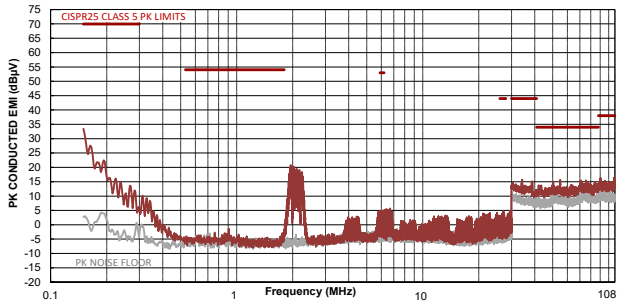


CISPR25 Class 5 Average Conducted Emissions

150kHz to 108MHz

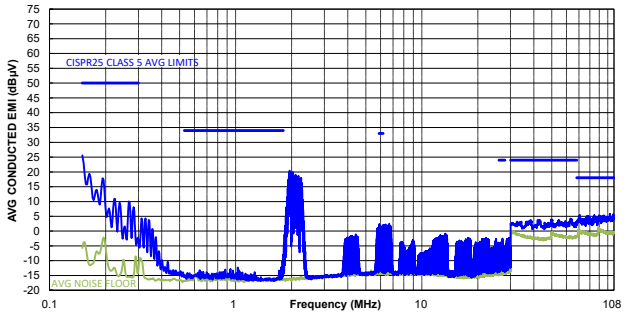


CISPR25 Class 5 Peak Radiated Emissions

150kHz to 30MHz

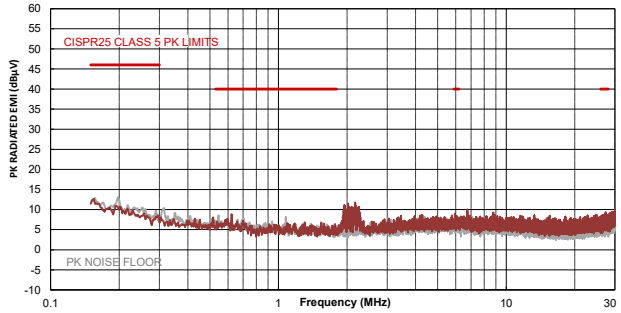


CISPR25 Class 5 Average Radiated Emissions

150kHz to 30MHz

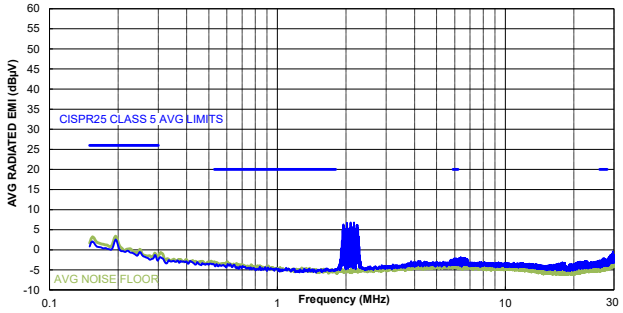


CISPR25 Class 5 Peak Radiated Emissions

Horizontal, 30MHz to 1GHz

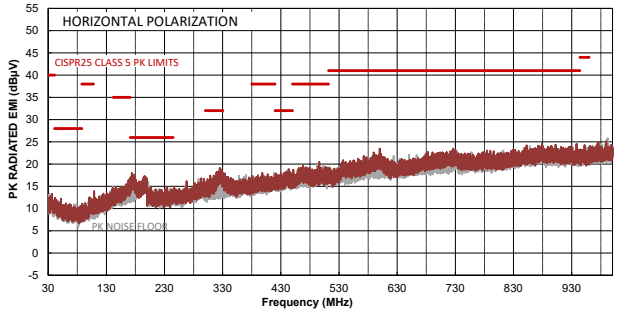

CISPR25 Class 5 Average Radiated Emissions

Horizontal, 30MHz to 1GHz

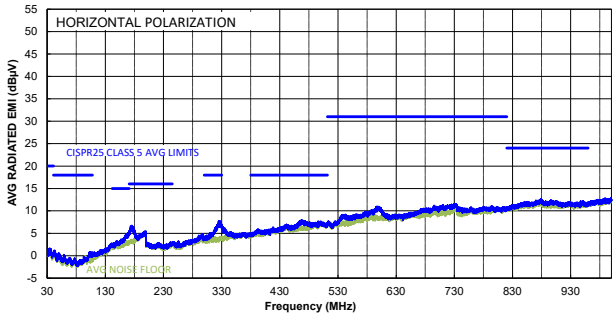


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, T_A = 25°C, unless otherwise noted.


CISPR25 Class 5 Peak Radiated Emissions

Vertical, 30MHz to 1GHz

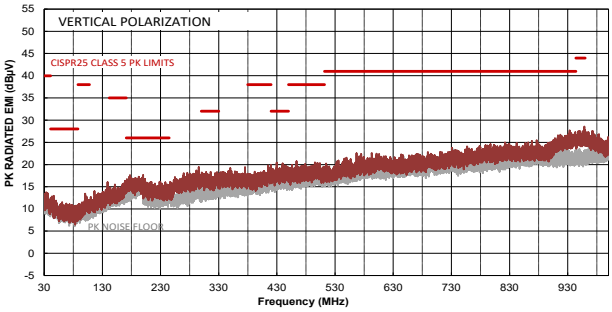

CISPR25 Class 5 Average Radiated Emissions

Vertical, 30MHz to 1GHz

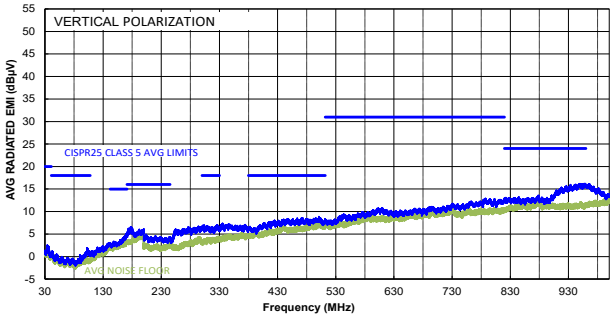


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, T_A = 25°C, unless otherwise noted.


Steady State

I_{OUT} = 0A

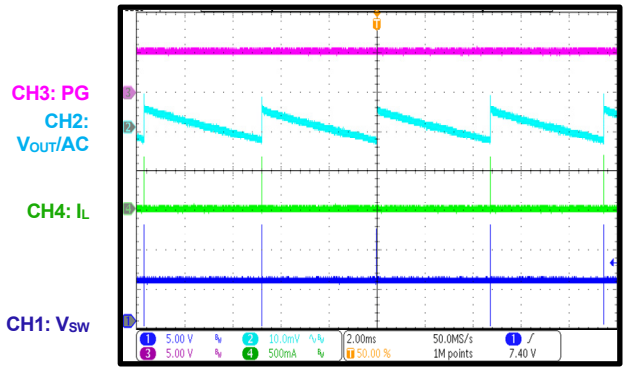


Steady State

I_{OUT} = 3A

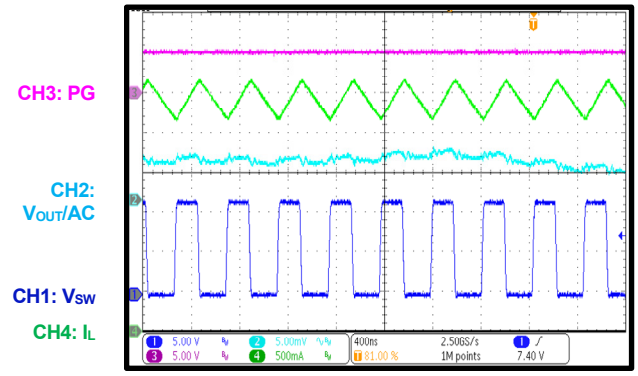


Start-Up through VIN

I_{OUT} = 0A

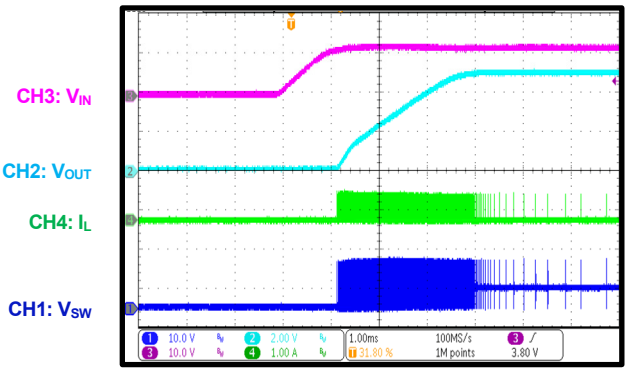


Start-Up through VIN

I_{OUT} = 3A

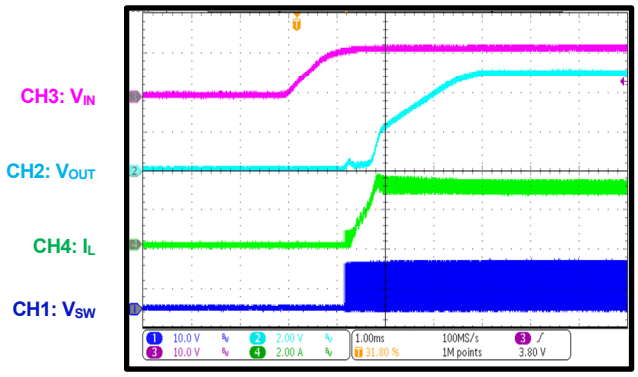


Shutdown through VIN

I_{OUT} = 0A

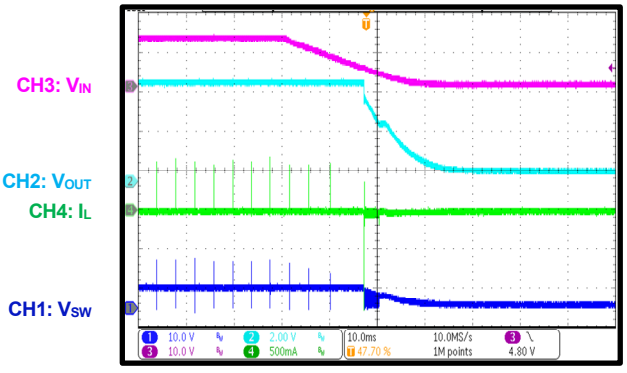

Shutdown through VIN

I_{OUT} = 3A

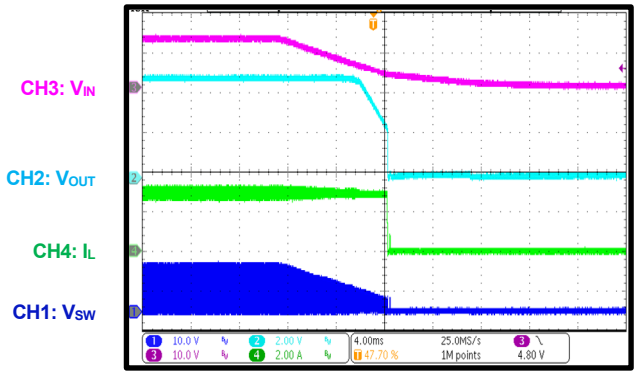


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, T_A = 25°C, unless otherwise noted.


Start-Up through EN

I_{OUT} = 0A

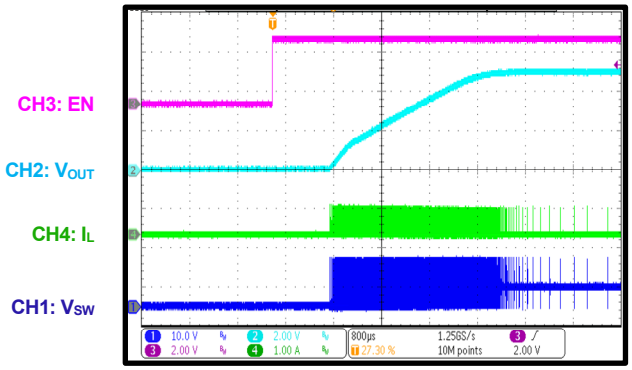


Start-Up through EN

I_{OUT} = 3A

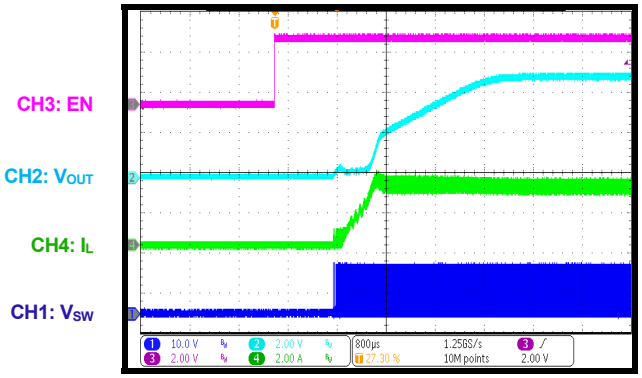


Shutdown through EN

I_{OUT} = 0A

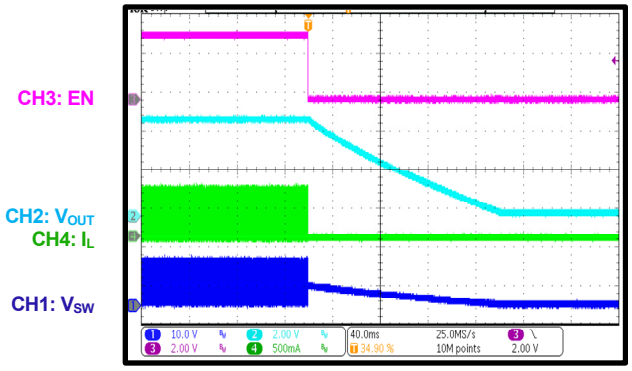


Shutdown through EN

I_{OUT} = 3A

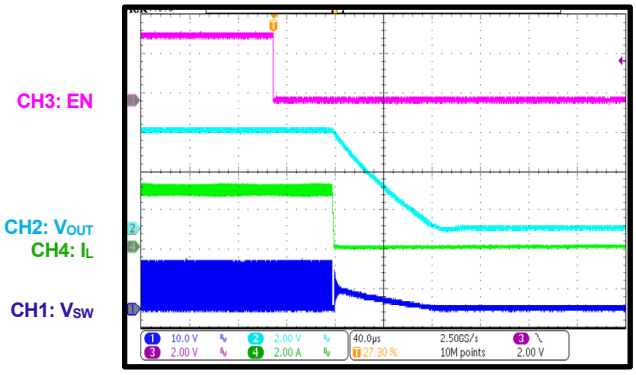


PG in Start-Up through VIN

I_{OUT} = 0A

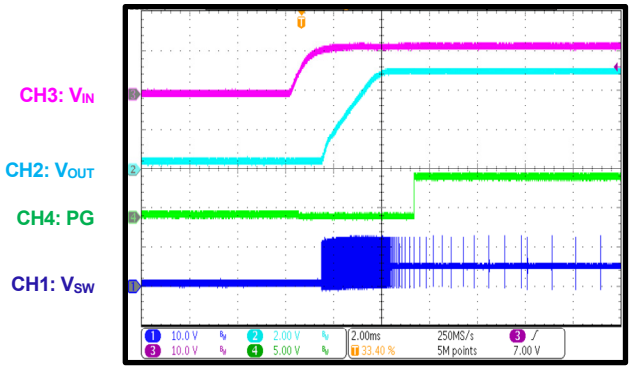

PG in Start-Up through VIN

I_{OUT} = 3A

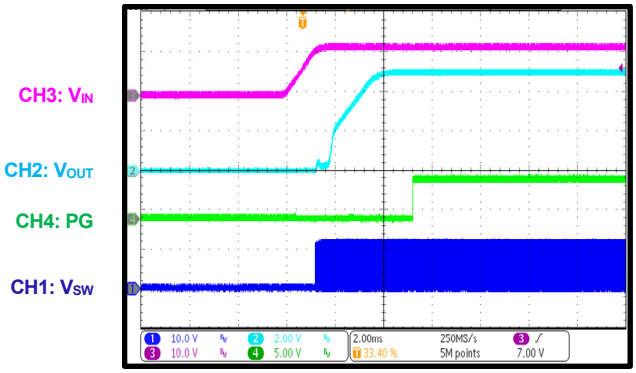


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, T_A = 25°C, unless otherwise noted.


PG in Shutdown through VIN

I_{OUT} = 0A

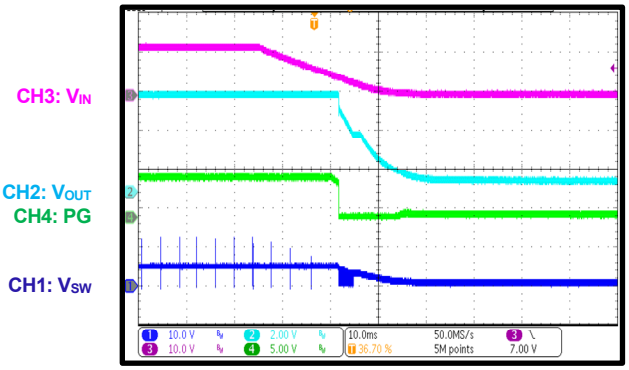


PG in Shutdown through VIN

I_{OUT} = 3A

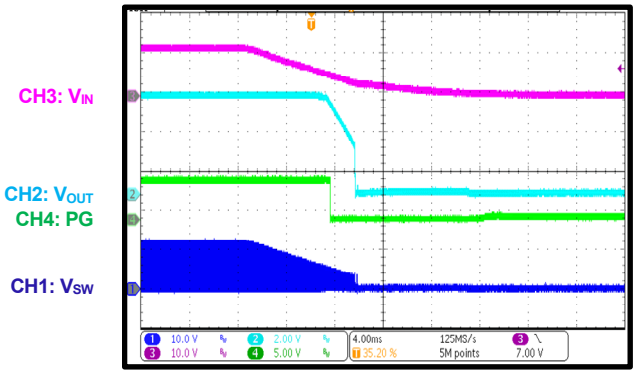


PG in Start-Up through EN

I_{OUT} = 0A

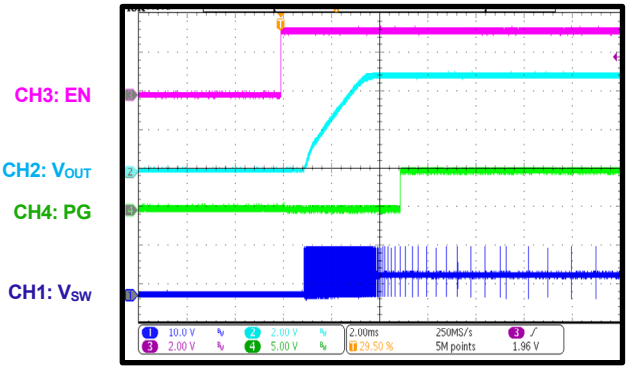


PG in Start-Up through EN

I_{OUT} = 3A

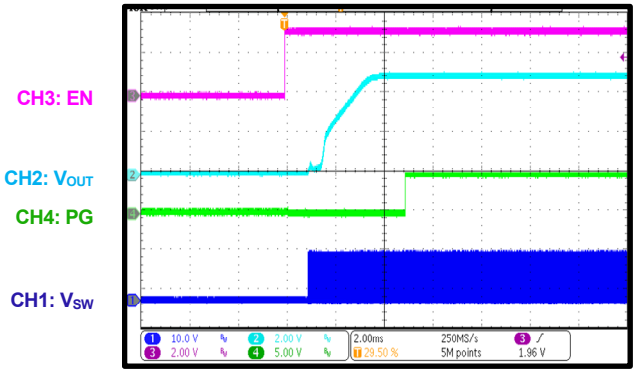


PG in Shutdown through EN

I_{OUT} = 0A

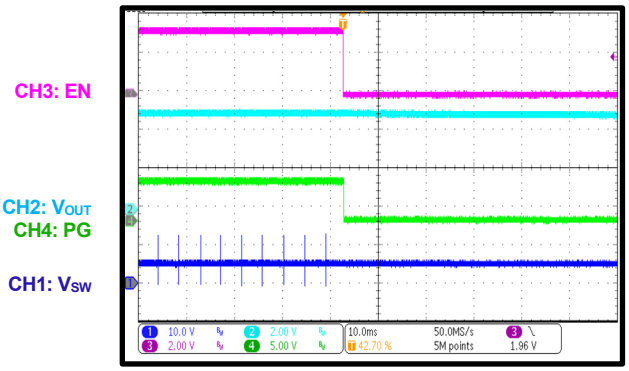

PG in Shutdown through EN

I_{OUT} = 3A

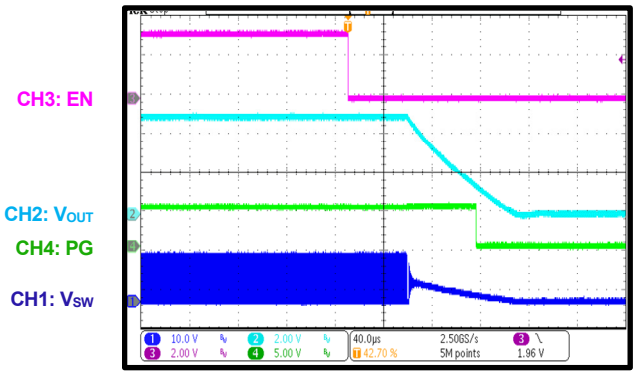


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, T_A = 25°C, unless otherwise noted.


Low-Dropout Mode

I_{OUT} = 0A, V_{IN} = 3.3V

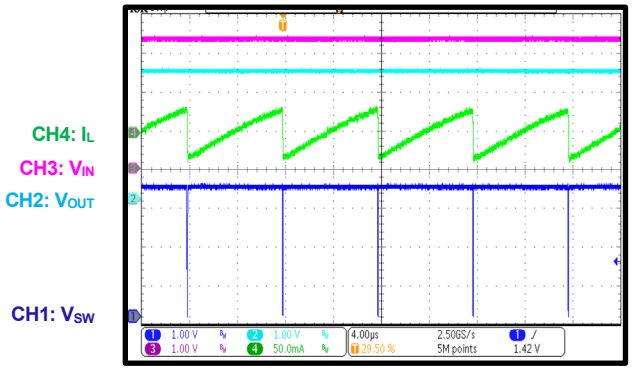


Low-Dropout Mode

I_{OUT} = 3A, V_{IN} = 3.3V

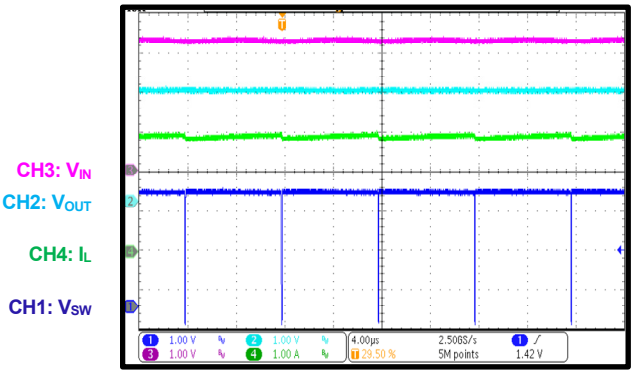


SCP Entry

I_{OUT} = 0A

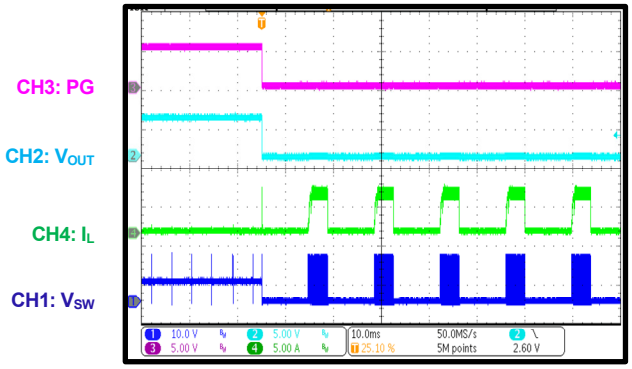


SCP Entry

I_{OUT} = 3A

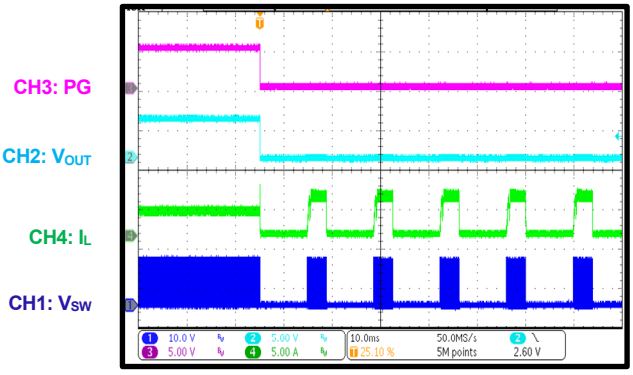


SCP Recovery

I_{OUT} = 0A

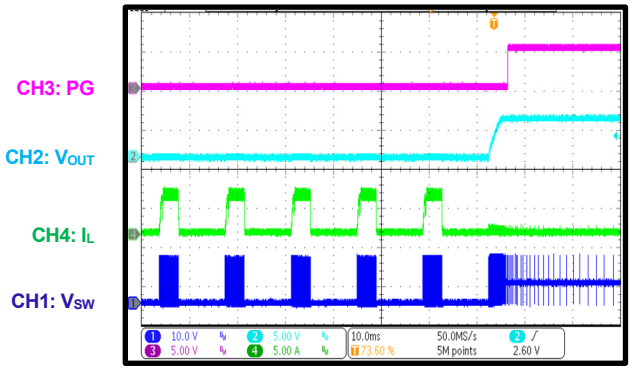

SCP Recovery

I_{OUT} = 3A

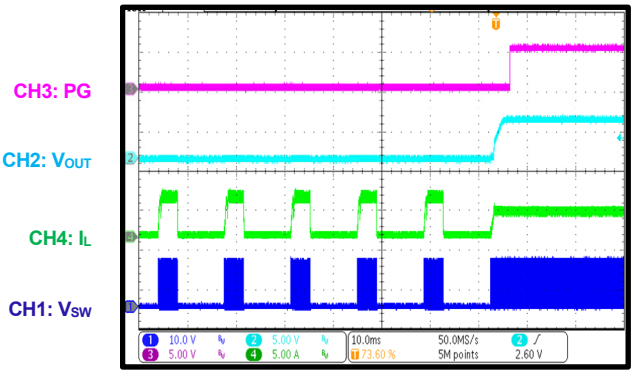


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, T_A = 25°C, unless otherwise noted.


SCP Steady State

I_{OUT} = 0A

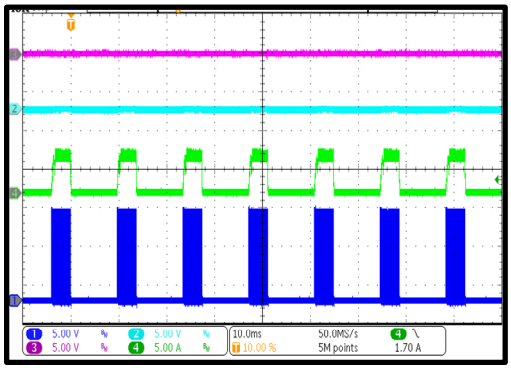


Load Transient

I_{OUT} = 1.5A to 3A, 1.6A/µs

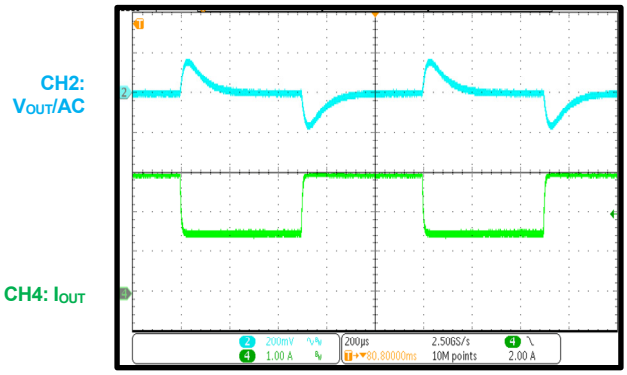


Load Dump

V_{IN}= 12V to 42V, I_{OUT} = 0A

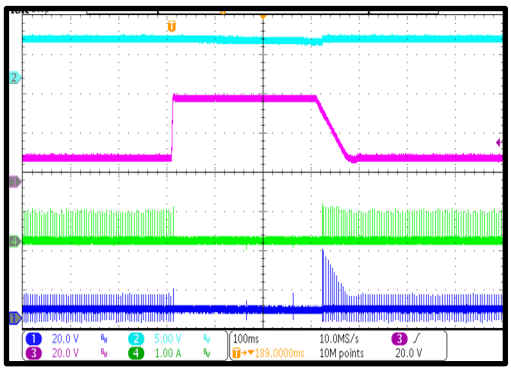


Load Dump

V_{IN} = 12V to 42V, I_{OUT} = 3A

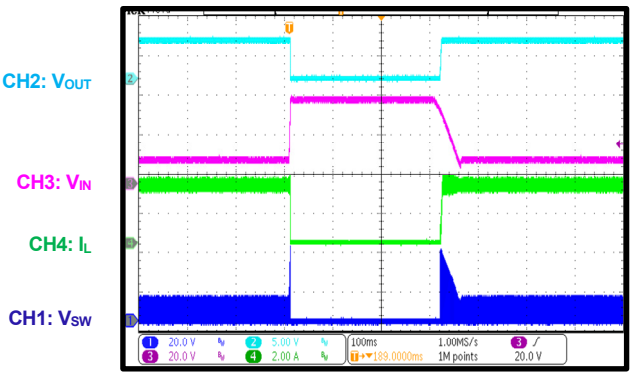


Cold Crank

V_{IN} = 12V to 3.3V to 6V, I_{OUT} = 0A

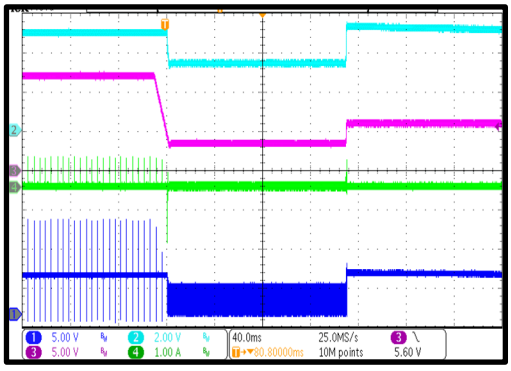

Cold Crank

V_{IN} = 12V to 3.3V to 6V, I_{OUT} = 3A

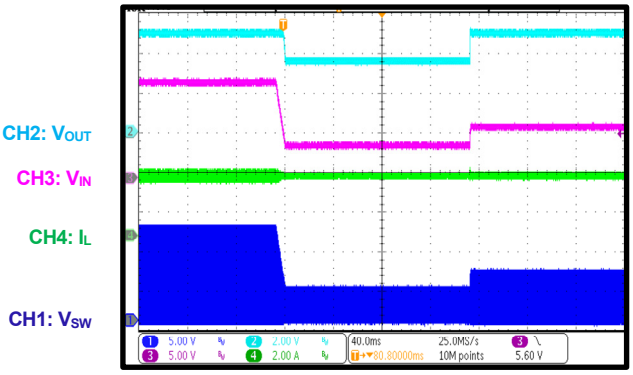


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board. V_{IN} = 12V, V_{OUT} = 5V, T_A = 25°C, unless otherwise noted.


V_{IN} Ramping Down and Up

V_{IN} = 6V to 0V, 0.5V/min, I_{OUT} = 0A

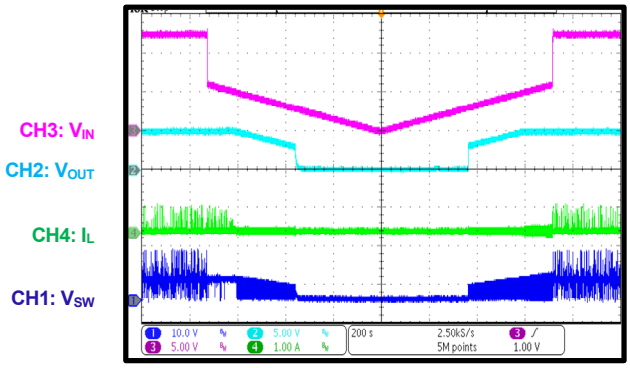

V_{IN} Ramping Down and Up

V_{IN} = 6V to 0V, 0.5V/min, I_{OUT} = 3A

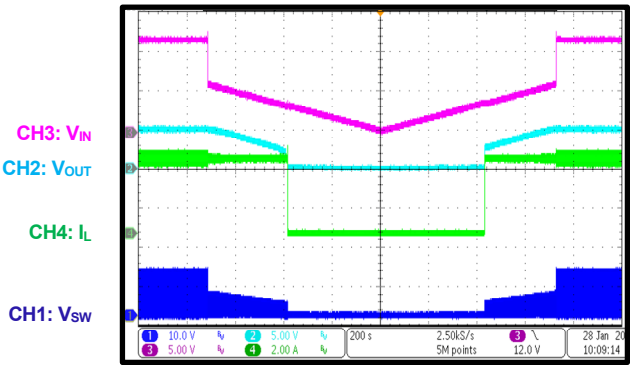

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

PCB LAYOUT

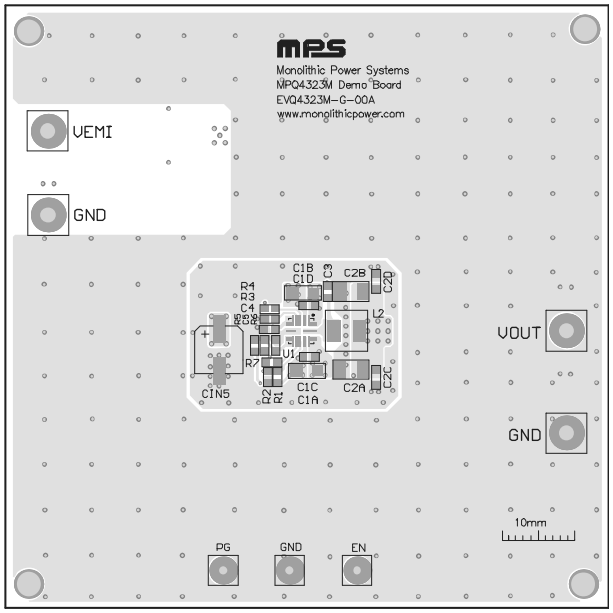


Figure 4: Top Silk and Top Layer

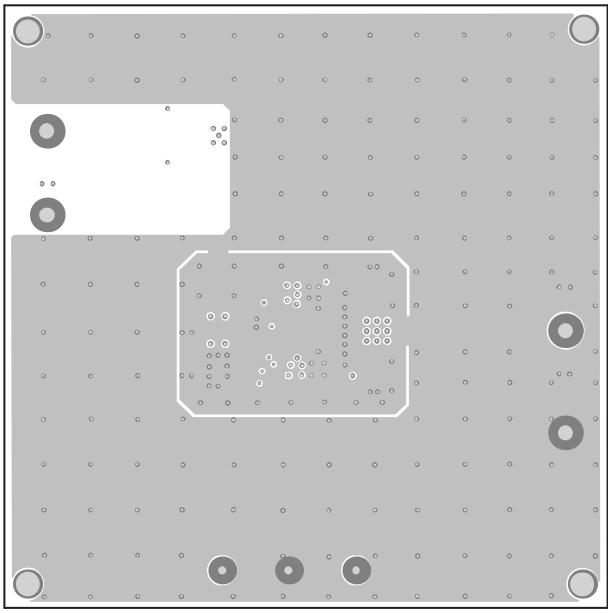


Figure 5: Mid-Layer 1

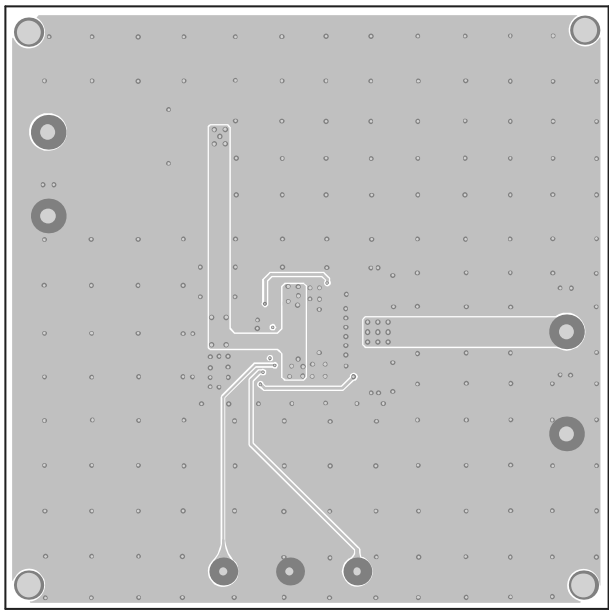


Figure 6: Mid-Layer 2

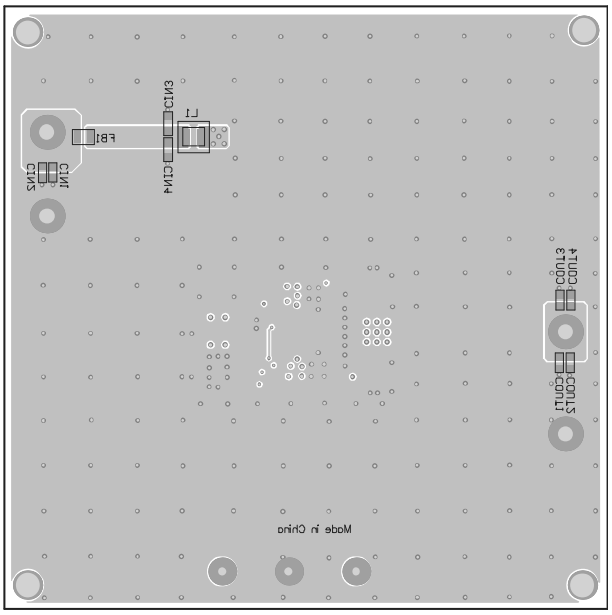


Figure 7: Bottom Layer and Bottom Silk

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	4/27/2022	Initial Release	-

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.