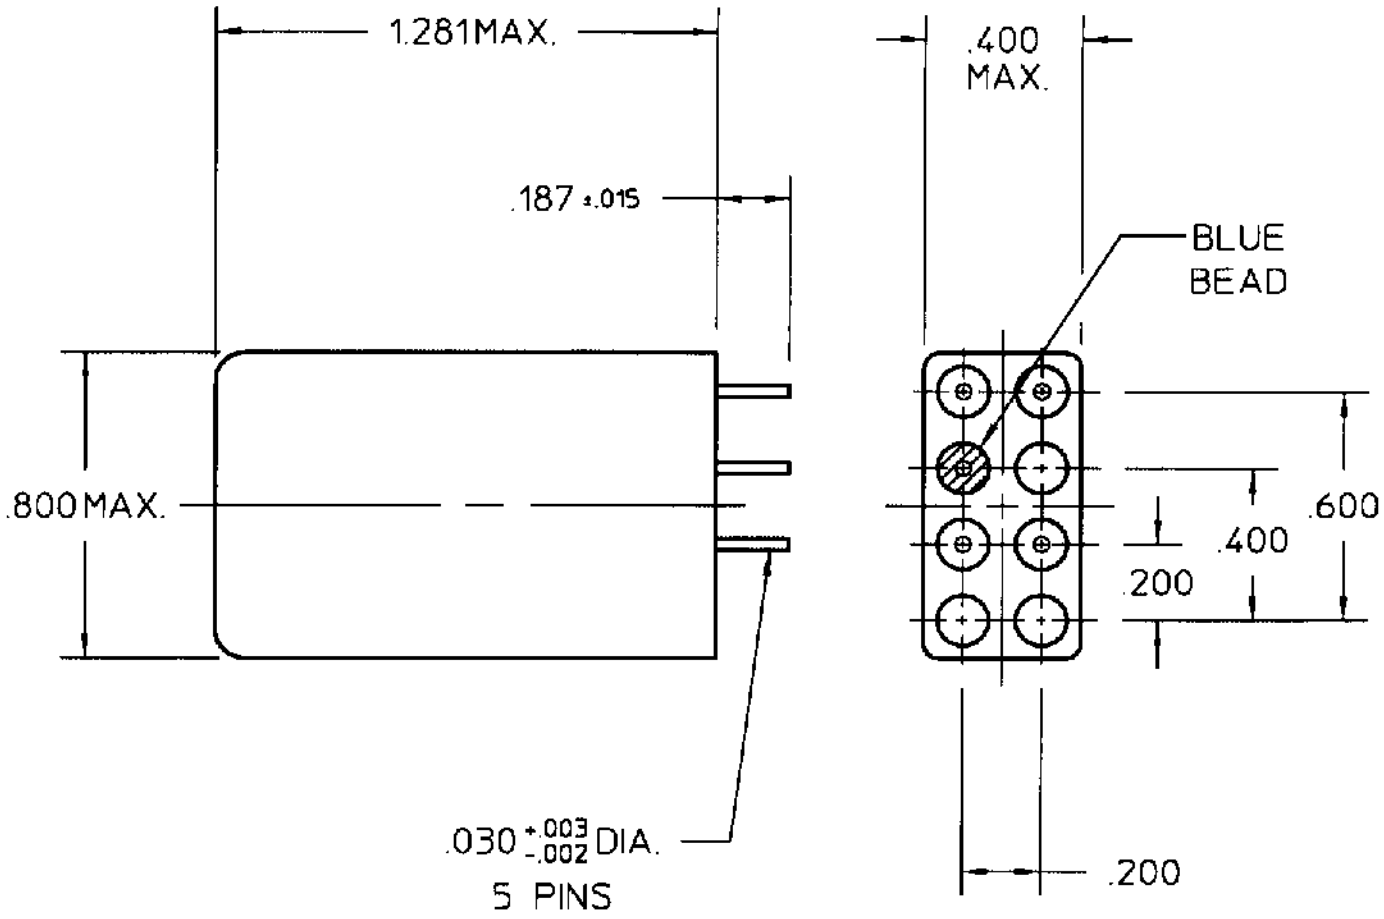


COIL: @ 25°C

RESISTANCE	10000 OHMS ± 10%
NOMINAL VOLTAGE	32.0 VDC
MUST OPERATE	1.6 mADC
MUST RELEASE	0.16 mADC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 15 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 15 MS MAX.
RELEASE TIME 10 MS MAX.
CONTACT BOUNCE 3 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 2A
30 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 1/10/96 | CK. 1/10/96

COMMUNICATIONS INSTRUMENTS, INC.

CUST. Hi-G
CUST. NO. 1BC-2A-140

TYPE "SF" RELAY

SF5601Y01