THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2009
© COPYRIGHT 2009 - ALL RIGHTS RESERVED.


LOC	DIST
A1	-


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	0-2141264-3 Durchmesser 9.4 war 10.0	27MAY2015	RSC	FWI
	C1	Revisionspunkte in Tabelle hinzu	24NOV2016	RSC	KKI
	C2	0-2141264-2 has been reactivated	31MAR2021	SK	TS
	D	Part Rev Marking Updated	07DEC2023	VR	KPY

2:1



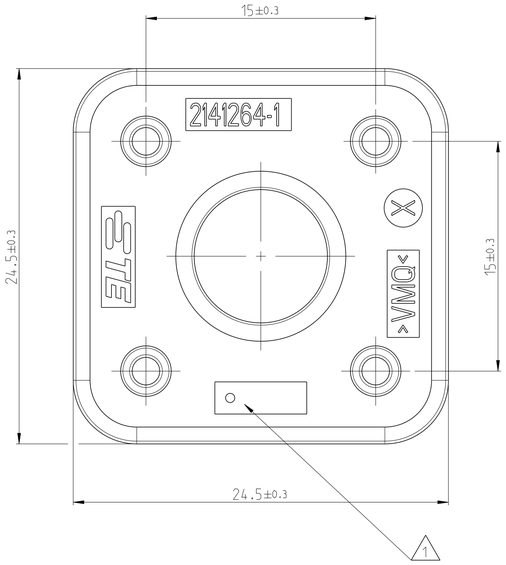

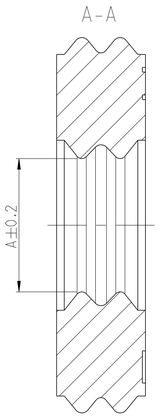

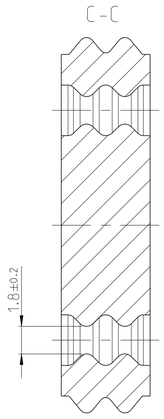

NOTE Bem.	FEATURE Merkmal	TE-PART-NO. Teil-Nr.
1	ENTIRE ASSEMBLY SEE Gesamtzusammenbau siehe	114-94100-1
2	PRODUCT-SPEC. Produkt-Spez.	108-94264
3	APPLICATION SPEC. Verarbeitungsspez.	114-94100

D

TE ORDER NO.	REV 1	DESCRIPTION	DIMENSION A	FOR WIRE ISOLATION DIAMETER [mm]	MATERIAL	WEIGHT [g]	COLOUR
2141264-4	B (2 DOT)	SINGLE WIRE SEAL, AMP MCP6.3/4.8K Kabeldichtung einzeln, AMP MCP6.3/4.8K	11.5	12.2 - 12.8	SILICON	3	YELLOW
2141264-3	C (4 DOTS)		9.4	10.7 - 11.3			BLUE
2141264-2	A (1 DOT)		8.2	9.3 - 9.9			GREEN
2141264-1	-		8.7	9.9 - 10.5			WHITE

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
X PLC ±
ANGLES ±°

MATERIAL -
FINISH -

DWN Vishwa A 08FEB2011
CHK U.Hoeppner 28APR2011
APVD T.Reissnegger 04MAY2011
PRODUCT SPEC - 2
APPLICATION SPEC - 3
WEIGHT SEE TABLE

TE Connectivity

NAME SINGLE WIRE SEAL,AMP MCP6.3/4.8K
Kabeldichtung einzeln, AMP MCP6.3/4.8K
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2141264	

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 2 | REV D

THIS DRAWING IS UNPUBLISHED.
VERTRAULICHE UNVEROEFFENTLICHTE ZEICHNUNG.
© COPYRIGHT 2009 -
RELEASED FOR PUBLICATION - 2009
FREI FUER VEROEFFENTLICHUNG
ALL RIGHTS RESERVED.
ALLE INTERNATIONALEN RECHTE VORBEHALTEN.


MATED WITH
PASSEND ZU


LOC	DIST
A1	-

PROJEKT NR.


REVISIONS
AENDERUNGEN


P	LTR	DESCRIPTION BESCHREIBUNG	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-








2:1

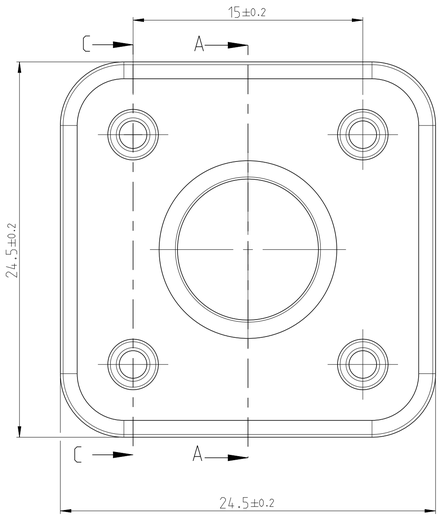

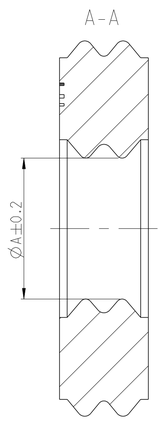


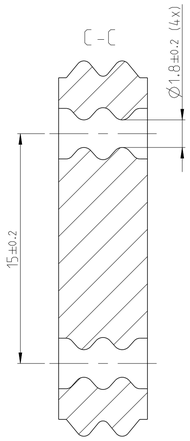

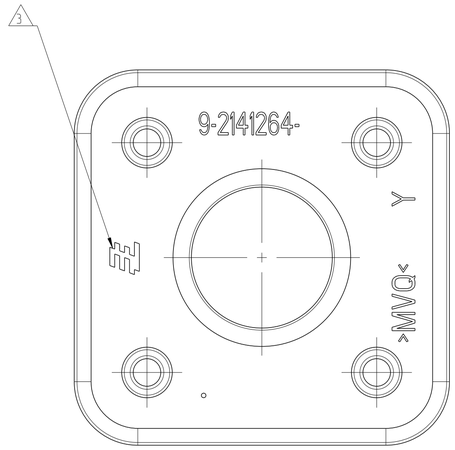





9-2141264-1



9-2141264-2



9-2141264-3



9-2141264-4

9-2141264-4	A	SINGLE WIRE SEAL, AMP MCP6.3/4.8K Kabeldichtung einzeln, AMP MCP6.3/4.8K	11.5	12.2 - 12.8	SILICON	3	YELLOW
9-2141264-3	A		10	10.7 - 11.3			NATURAL
9-2141264-2	A		8.6	9.3 - 9.9			GREEN
9-2141264-1	A		9.2	9.9 - 10.5			WHITE
TE ORDER NO.	REV	DESCRIPTION	DIMENSION A	FOR WIRE ISOLATION DIAMETER [mm]	MATERIAL	WEIGHT [g]	COLOUR

NOTES:

Bemerkungen:

1 ONLY THE GERMAN LANGUAGE IS AUTHORITATIVE
Maßgebend ist der deutsche Text

2 PACKAGING: BULK PACKAGING IN AIRTIGHT PE-PACKET
Verpackung: Schüttgut in PE-Beutel luftdicht verpackt

△3 SUPPLIER-MARK
Lieferanten Kennzeichnung

NOTE Bem.	FEATURE Merkmal	TE-PART-NO. Teil-Nr.
4	ENTIRE ASSEMBLY SEE Gesamtzusammenbau siehe	114-94100-1
△5	PRODUCT-SPEC. Produkt-Spez.	108-94264
△6	APPLICATION SPEC. Verarbeitungsspez.	114-94100

TOLERANCES UNLESS OTHERWISE SPECIFIED ACC. TO DIN 16901-140 CENTRIC TO NOMINAL DIMENSION. EDITION 1982-11 SHALL APPLY.
Freimaßtoleranzen nach DIN 16901-140. Es gilt die Ausgabe 1982-11.

PRODUCT CHARACTERISTICS ACC. QMP EMEA_12
BESONDERE MERKMALE NACH QMP EMEA_12

TOLERANCING ISO 8015
TOLERIERUNG ISO 8015

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIESES ZEICHNUNGSDOKUMENT WIRD DURCH AMP INCORPORATED KONTROLLIERT.
ANDERUNGEN, DIE DEM TECHNISCHEN FORTSCHRITT DIENEN, SIND VORBEHALTEN.
DEN ZWECK UEBERSTEIGENDE VERVIELFAELTIGUNG UNTERSAGT DIE AMP ANWEISE.

DIMENSIONS:
MASSEINHEITEN:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
ALLGEMEINTOLERANZEN:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±

ANGLES/WINKEL ±2°

MATERIAL
-
-

FINISH/OBERFLAECHE/FARBE
-
-

DWN Vishwa A 08FEB2011
CHK U.Hoeppner 28APR2011
APVD T.Reissnegger 04MAY2011
PRODUCT SPEC PRODUKTSPEZ. - 5
APPLICATION SPEC VERARBEITUNGSSPEZ. - 6
WEIGHT GEWICHT SEE TABLE

TE Connectivity

NAME
SINGLE WIRE SEAL,AMP MCP6.3/4.8K
Kabeldichtung einzeln, AMP MCP6.3/4.8K
-

SIZE	CAGE CODE	DRAWING NO ZEICHNUNGS-NR.	RESTRICTED TO NUR FUER
A1	00779	C-2141264	

CUSTOMER DRAWING /KUNDENZEICHNUNG
SCALE MASSSTAB 5:1 SHEET BLATT 2 OF VON 2 REV D