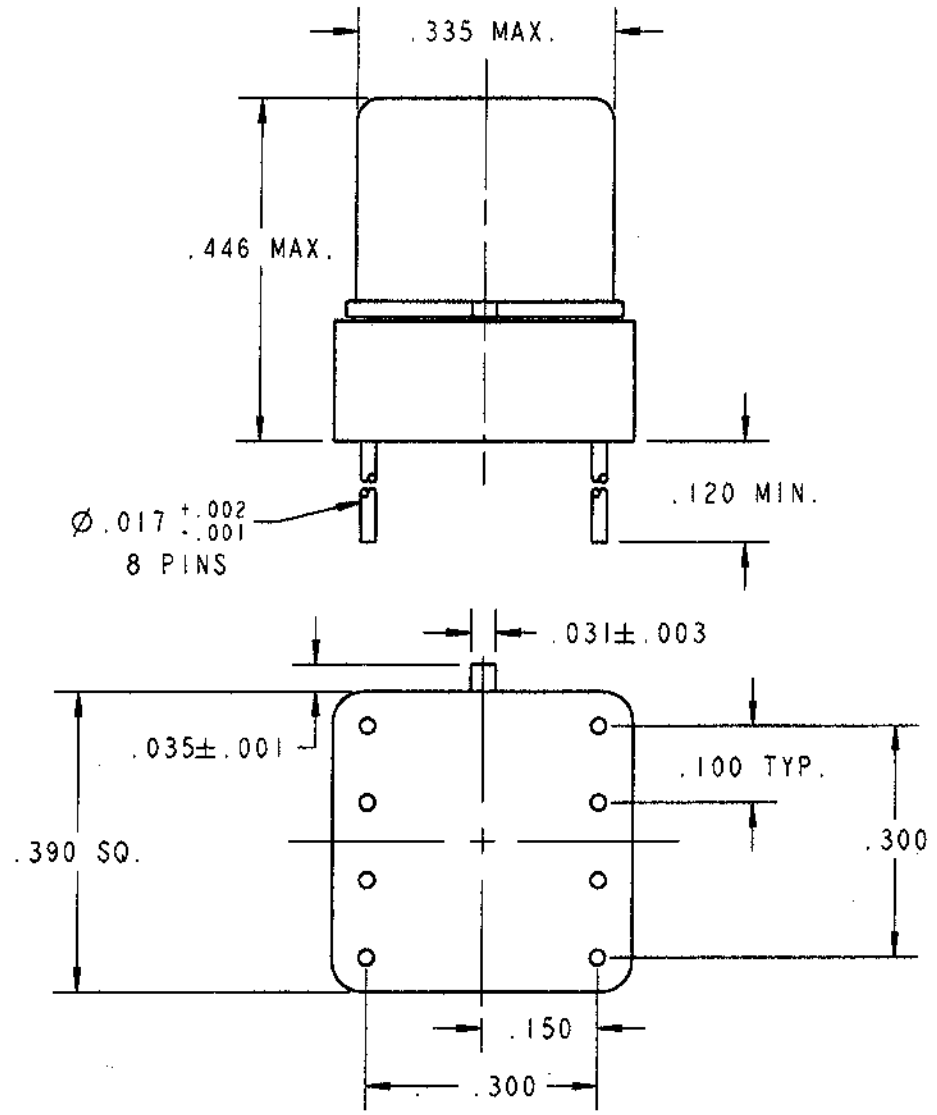


REV. 0
DCO 143149

COIL: @ 25°C

RESISTANCE 1560 Ω ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 14.2 VDC

MUST RELEASE 8.0 VDC MAX, 1.37 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
RELEASE TIME 4.0 MS MAX
CONTACT STABILIZATION 2.0 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 8/10/01 CK 8/10/01

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/15-129P REV.

"JMAD" RELAY

JMACD-26XPS2

F-718 REV. 3