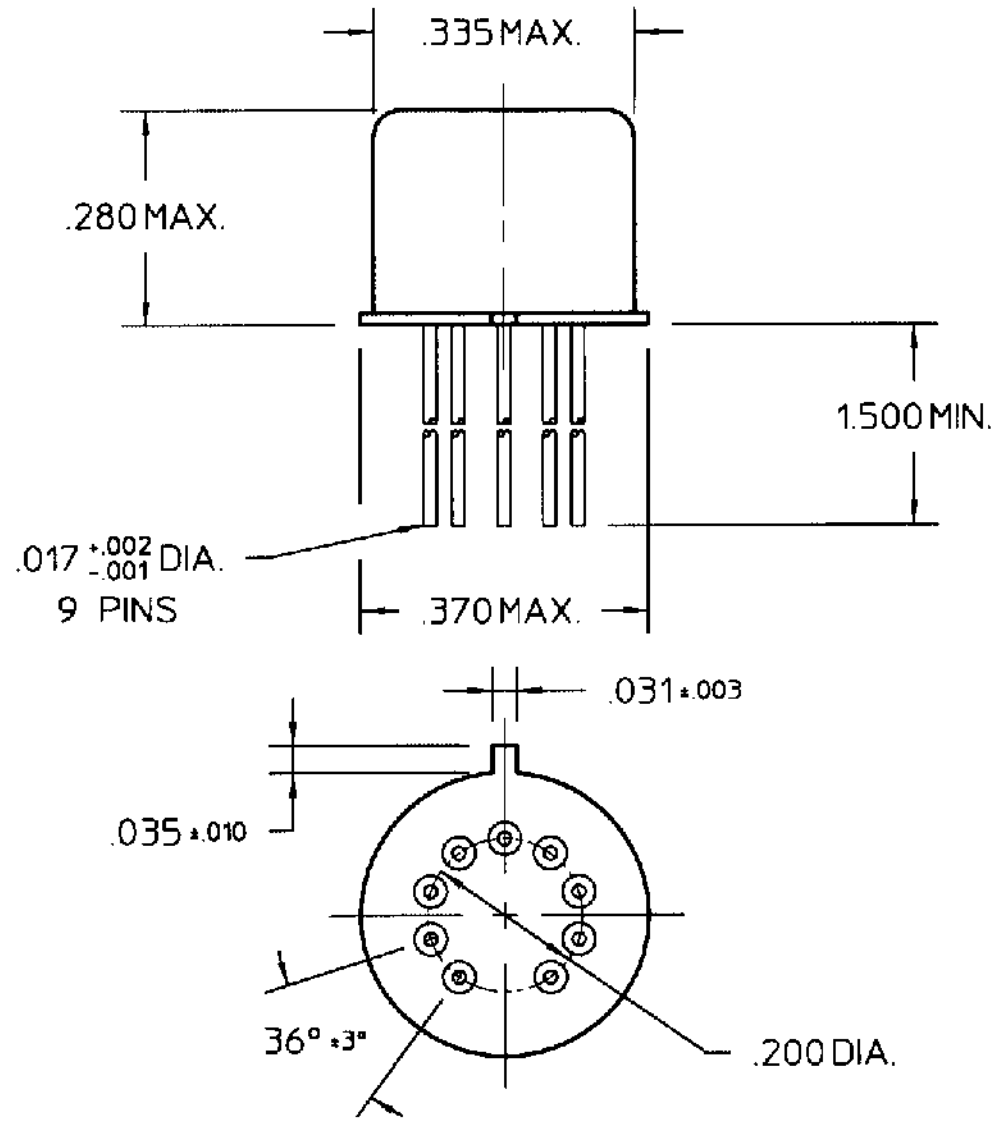


COIL: @ 25°C

RESISTANCE	1560 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE VOLTAGE	14.2 VDC
TURN-ON BASE CURRENT	0.13 mADC
MUST RELEASE	8.0 VDC MAX. 1.37 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: TURN-ON TIME 2.0 MS MAX
TURN-OFF TIME 7.5 MS MAX
CONTACT STABILIZATION TIME 2.0 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 6/18/97 CK. 6/18/97

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M28776/1-018M

TYPE "JMAT" RELAY

JMAWT-26XM