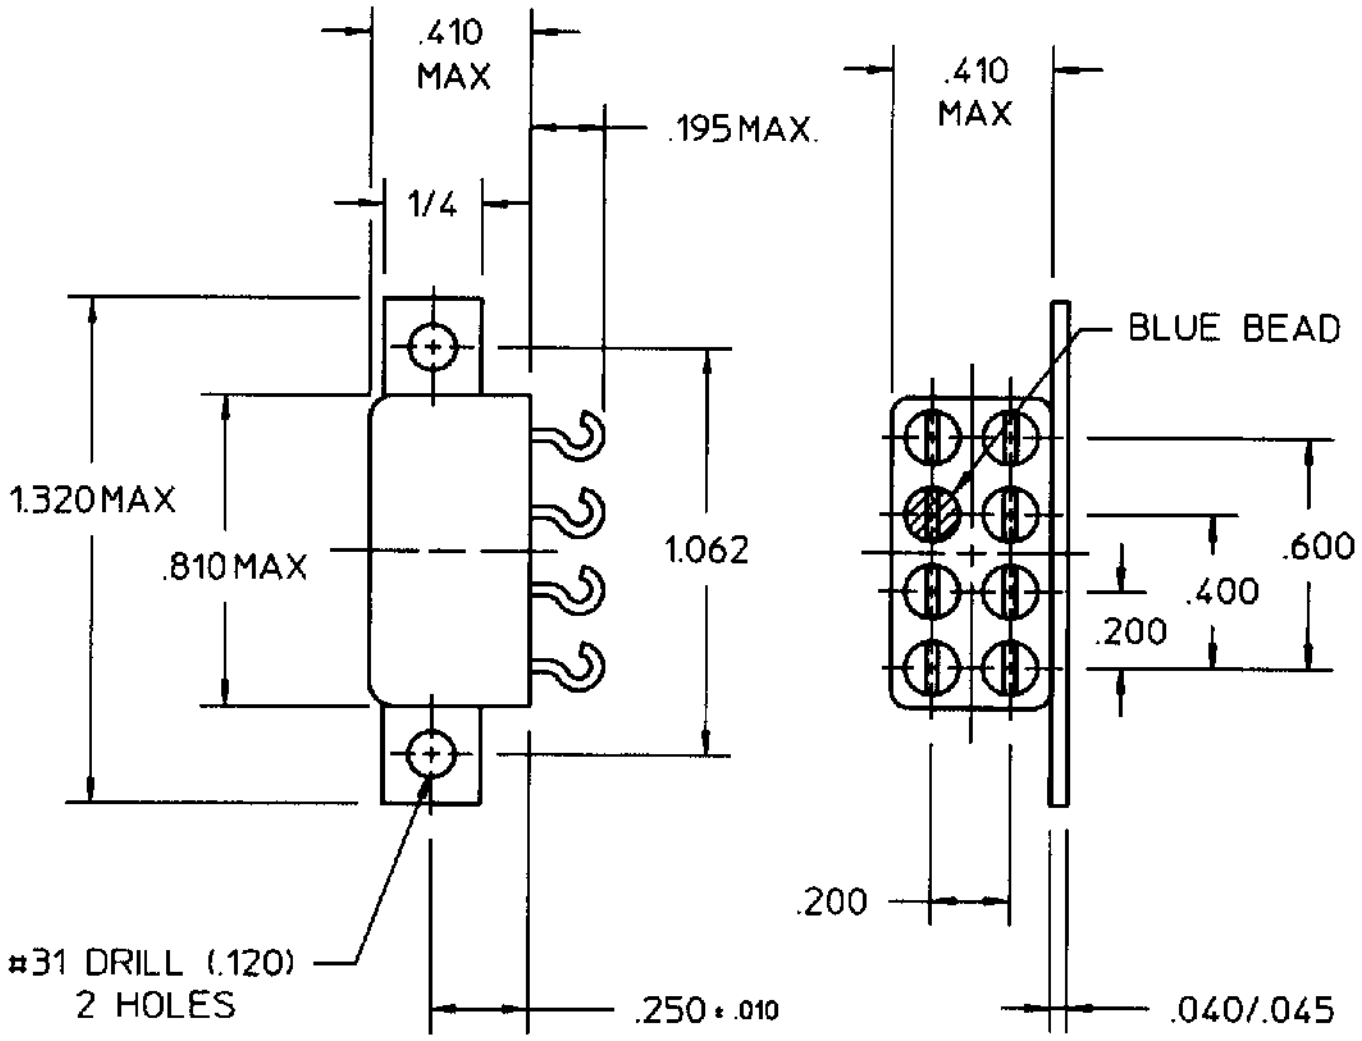


COIL:

RESISTANCE	2074 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.4 VDC
MUST RELEASE	1.4 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 5 MS MAX
RELEASE 3 MS MAX
BOUNCE 3 MS MAX

CUSTOMER DATA SHEET

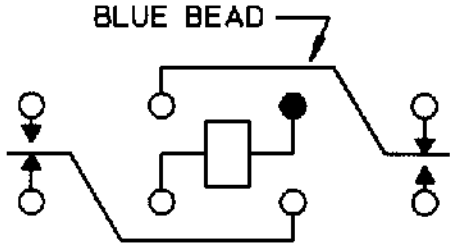

CONTACT RATING: LOW LEVEL TO 2A
30 VDC RESISTIVE 100,000
OPERATIONS MIN

DR. R.B. 5/20/92 CK. 5/20/92 J.B.

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. 2KA-1B-126

TYPE "HMS" RELAY

HMS1196S01