


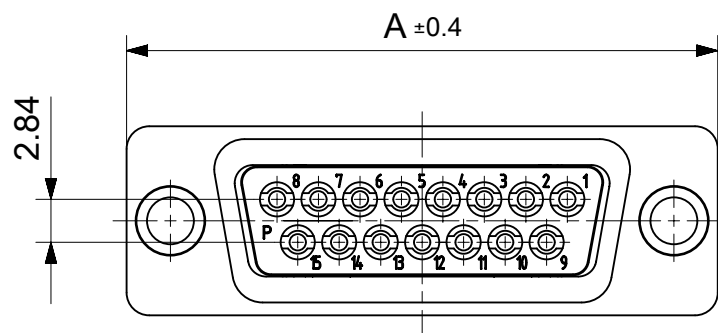

*2) xx No. of contacts 09, 15, 25 or 37

Material Number	y*1)	xx*2)	A[mm]	B[mm]	C[mm]
1727040009	L	09	30.8	16.9	25
1731090295	U				
1727040001	L	15	39.1	25.2	33.3
1731090327	U				
1727040003	L	25	53	38.9	47.04
1731090315	U				
1727040005	L	37	69.3	55.3	63.5
1731090516	U				


RoHS compliant
by exemption

3	1	Shell	Steel	tin plated
2	1	Insulator rear part	PEI (-55°C to +130°C)	green
1	1	Insulator front part	PBT acc. UL94V-0	green
No.	Pc.	Part	Type Description/Material	Surface plating/Color/Class

RoHS compliant

Crimp contacts not supplied with connector. Contacts must be ordered separately.

3	1	Shell	Steel	tin plated
2	1	Insulator rear part	PA (-55°C to +115°C)	black
1	1	Insulator front part	PBT acc. UL94V-0	black
No.	Pc.	Part	Type Description/Material	Surface plating/Color/Class

MEASUREMENTS WITHOUT TOLERANCE ACC TO ISO 2768-m					REPLACEMENT FOR DOCUMENT NUMBER: Fyxp7-K120							
FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					molex FCT D-SUB CRIMP CONNECTOR						
	CURRENT REV DESC:											
	EC NO: 717924 DRWN: SKANDB 2022/03/21 CHK'D: MTEUBEL 2022/08/18 APPR: MTEUBEL 2022/08/18											
	INITIAL REVISION:					DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		
	DRWN: SKANDB 2022/03/21 APPR: MTEUBEL 2022/08/18					1727040009		PSD	000	A		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					FIRST ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
						A3-SIZE		127204	SEE TABLE	GENERAL MARKET	1 OF 1	
	DIVISIONAL SYMBOLS											
	GENERAL TOLERANCES (UNLESS SPECIFIED)											
	ANGULAR TOL ± °											
4 PLACES ±												
3 PLACES ±												
2 PLACES ±												
1 PLACE ±												
0 PLACES ±												