

SHEET 1 OF 1





PANEL CUTOUT
MAX. PANEL THICKNESS
10.0mm [.43]

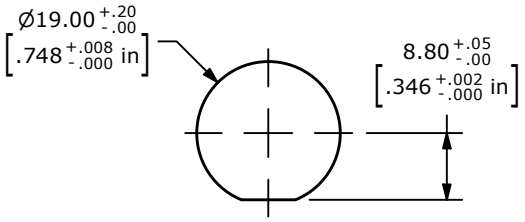

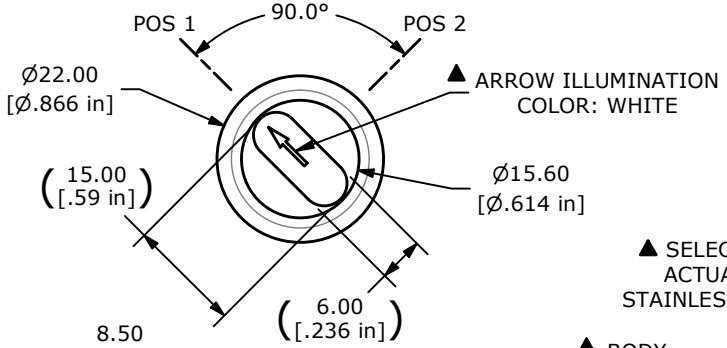




▲

| SWITCH FUNCTION | |
|---|---|
| POS. 1 | POS. 2 |
| ON | ON |
| 1-3 | 1-2 |





▲ SPDT ON-ON
CONTACT CONFIGURATION

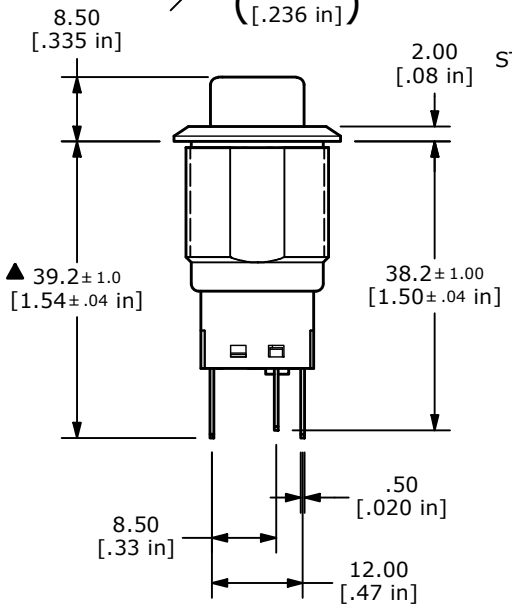

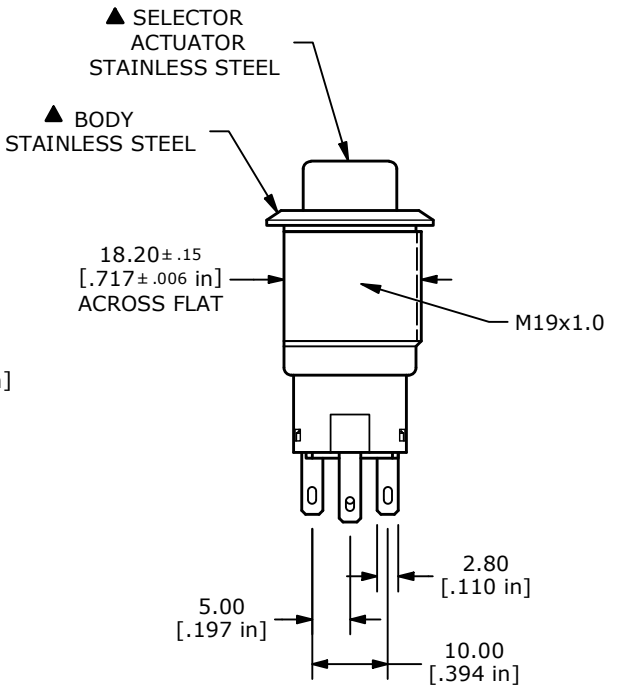
NOTE:
1. ALL DIMENSIONS IN mm [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A 24VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 1,500 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
10. OPERATING TEMP.: -20°C to 55°C
11. ▲ DENOTES CRITICAL PARAMETER.
▲ 12. LAMP VOLTAGE: 24V
13. INGRESS PROTECTION: IP65
▲ 14. HARDWARE SUPPLIED: O-RING AND HEXNUT

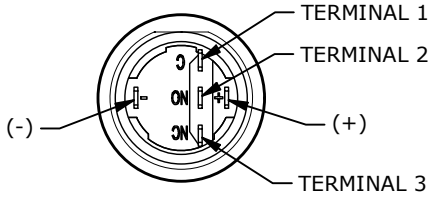


| REV | ECO NO | DESCRIPTION | DATE | BY |
|---|---|---|---|---|
| B | ECO-102081 | ACTUATOR DIMS CHANGE TO REFERENCE | 07/13/23 | JS |
| | | | | |
| | | | | |

*THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED*

E·SWITCH®

OBJECT ID 100124778

TITLE PVK4S21A0SS-A05

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| 1:1 | 5/24/2023 | MW | 52-PVK4S21A0SSA05 | B |