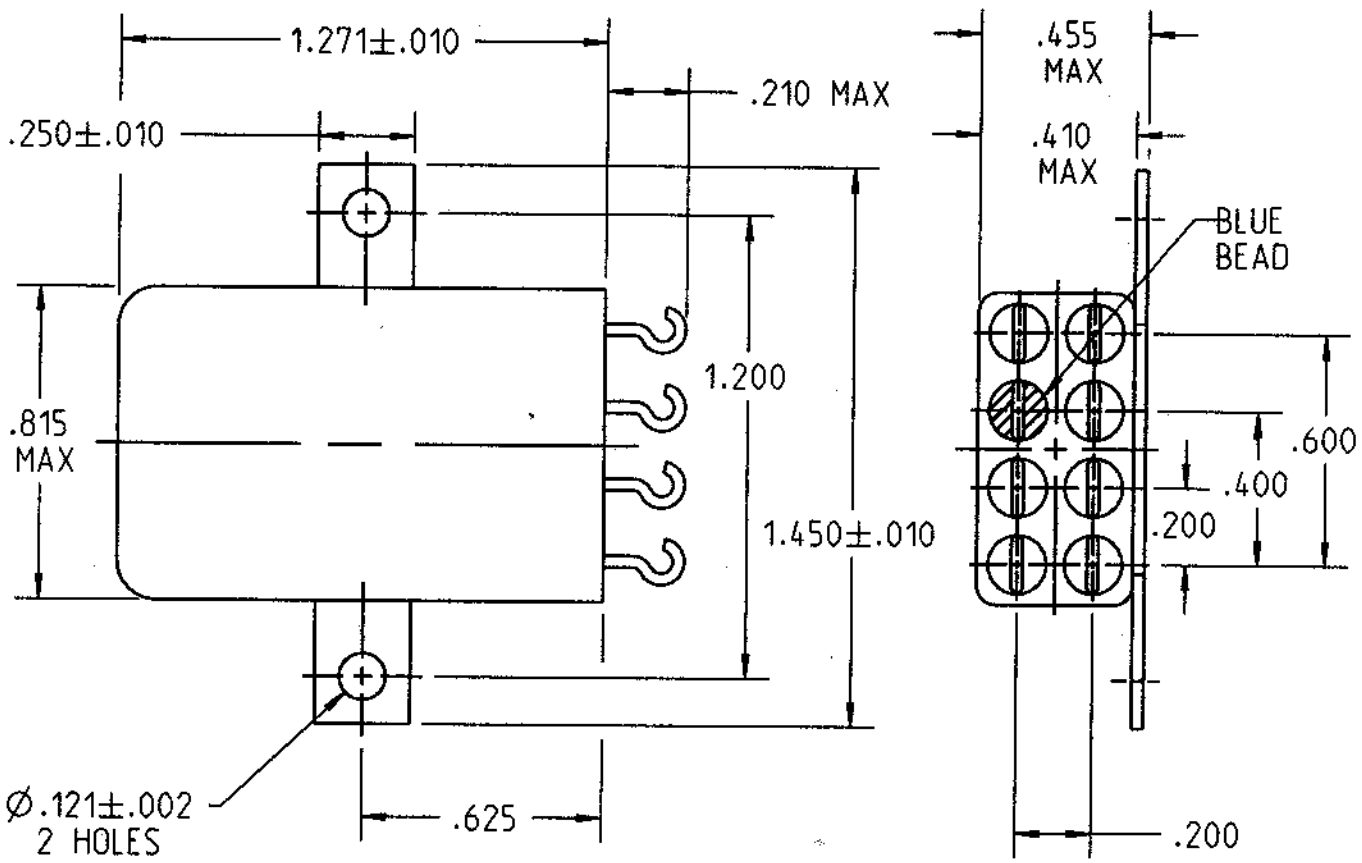


REV. 0
DCO 170672

COIL: @ 25°C

RESISTANCE 10000 OHMS ±10%

NOMINAL VOLTAGE 4.0 mADC

MUST OPERATE 2.0 mADC

MUST RELEASE 1.0 mADC MAX 0.20 mADC MIN

ENVIRONMENT:

VIBRATION 10 Hz TO 2000 Hz @ 15 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C


NOTES:

OPERATE TIME 15 MS MAX.

RELEASE TIME 10 MS MAX.

CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

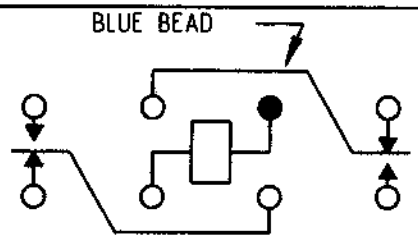

TERMINAL VIEW

CONTACT RATING:
LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. ASB 10 JUL 02 CK. 7/11/02

CII Technologies
advanced control electronic solutions

CUST. QPL

CUST. NO. M5757/13-143 REV.

3SAT RELAY

3SAT1360A2

F-718 REV. 4