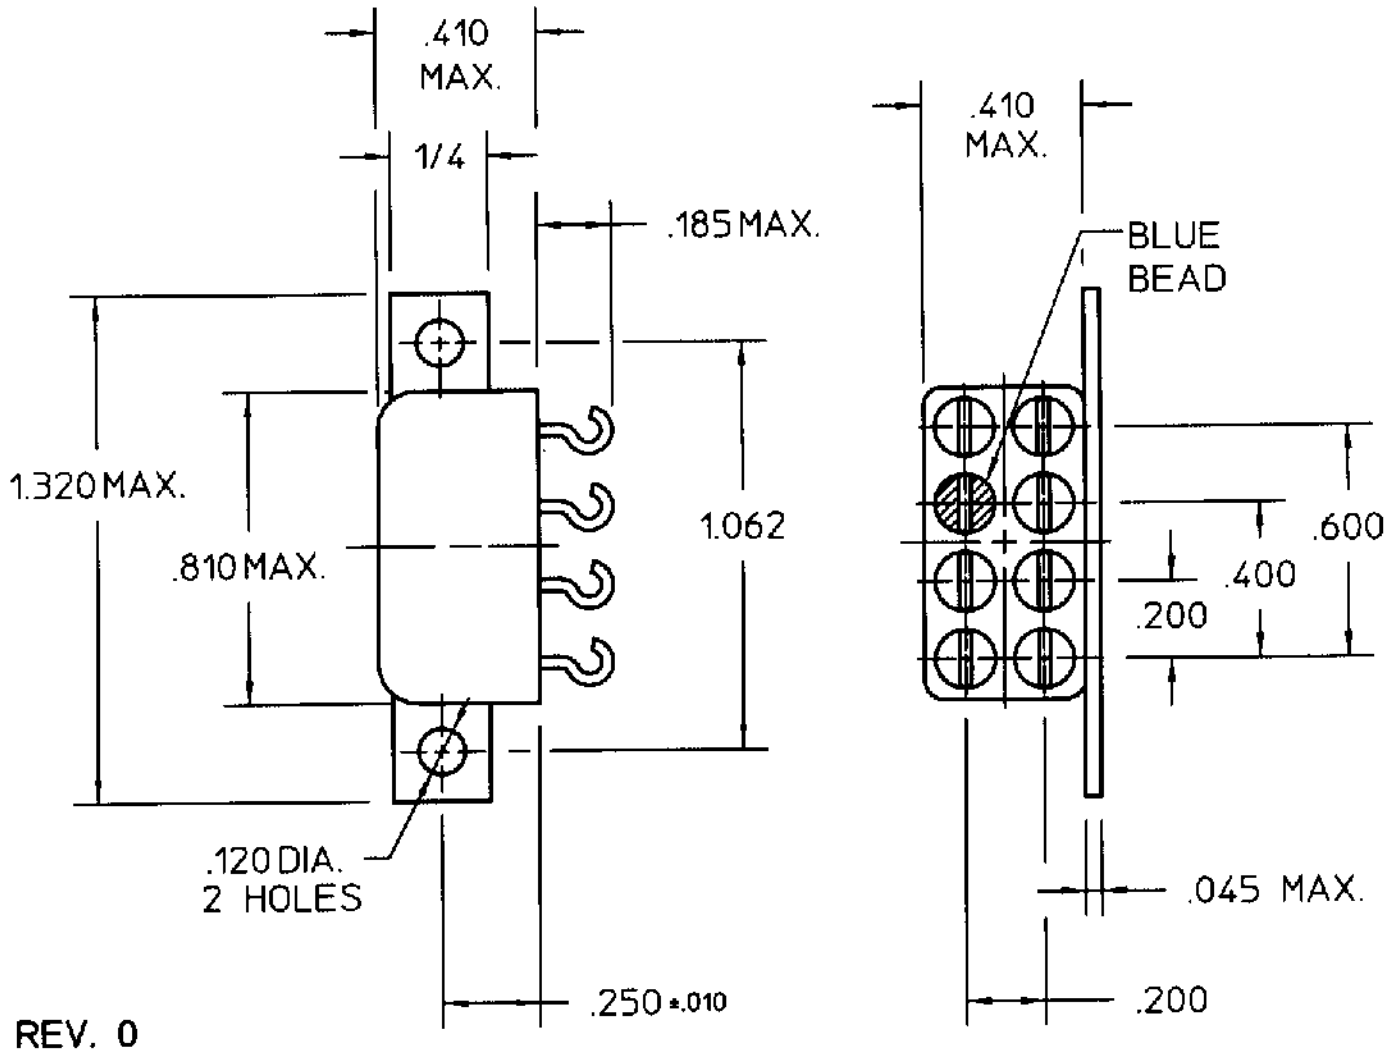


REV. 0

DCO 15842

COIL: @ 25°C

RESISTANCE 814 OHMS ±10%

NOMINAL VOLTAGE 24 VDC

MUST OPERATE 12.4 VDC

MUST RELEASE

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 3.5 MS MAX
RELEASE 3 MS MAX
CONTACT BOUNCE 1 MS MAX

CUSTOMER DATA SHEET

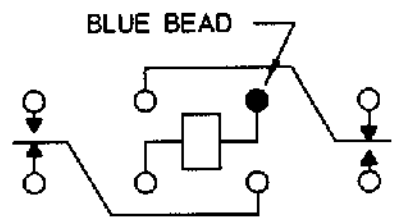

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. B.D. 9/23/99 | CK GH 9/23/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. P & B

CUST. NO. HCM-11DB-24 REV.

"HFW" RELAY

HFW1196S04