
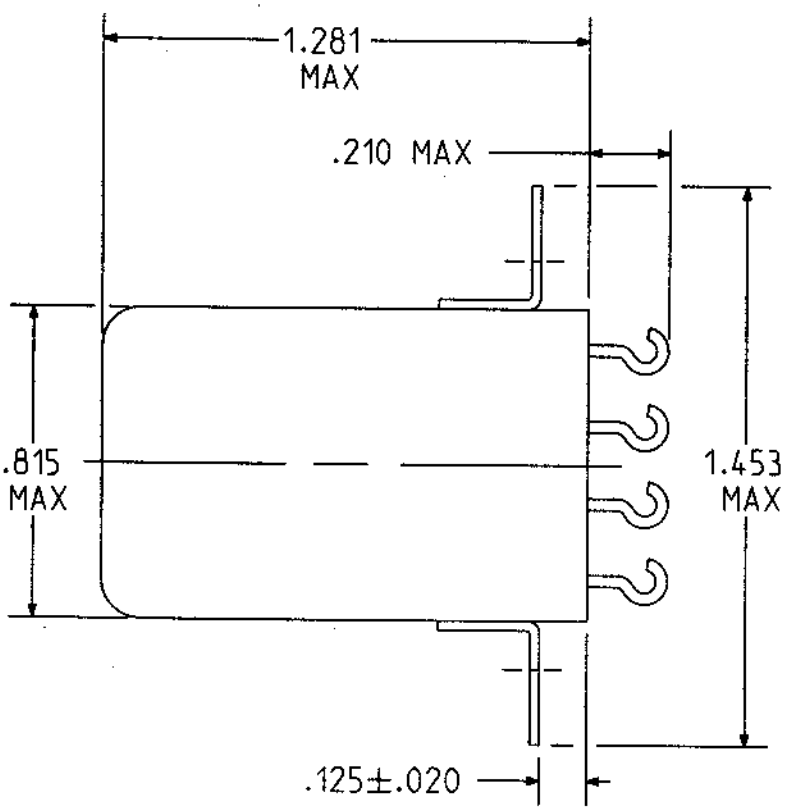


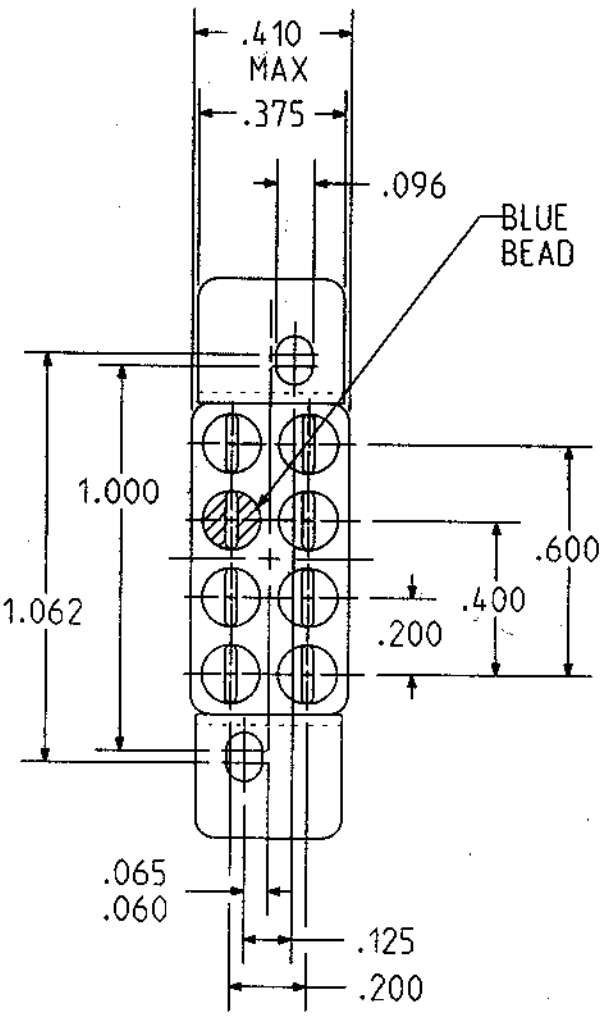

REV. 0
DCO 170687

COIL: @ 25°C

RESISTANCE	1000 OHMS ±10%
NOMINAL VOLTAGE	13.0 mADC
MUST OPERATE	6.5 mADC
MUST RELEASE	3.1 mADC MAX. 0.65 mADC MIN

ENVIRONMENT:


VIBRATION 10 Hz TO 2000 Hz @ 15 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX
RELEASE 10 MS MAX
CONTACT BOUNCE 1 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. ASB 27MAY03 CK. 5/27/03

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/13-107 REV.

"3SAT" RELAY

3SAT1324A2

F-718 REV. 4