




SHUR-PLUG 156

TE Internal #: 61388-1  
Crimp Wire Pins, Tabs & Ferrules, Shur-Plug, Mating Pin Diameter  
3.96 mm [.156 in], 20 – 16 AWG Wire Size, .5 – 1.3 mm<sup>2</sup> Wire Size,  
SHUR-PLUG 156

[View on TE.com >](#)

Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules

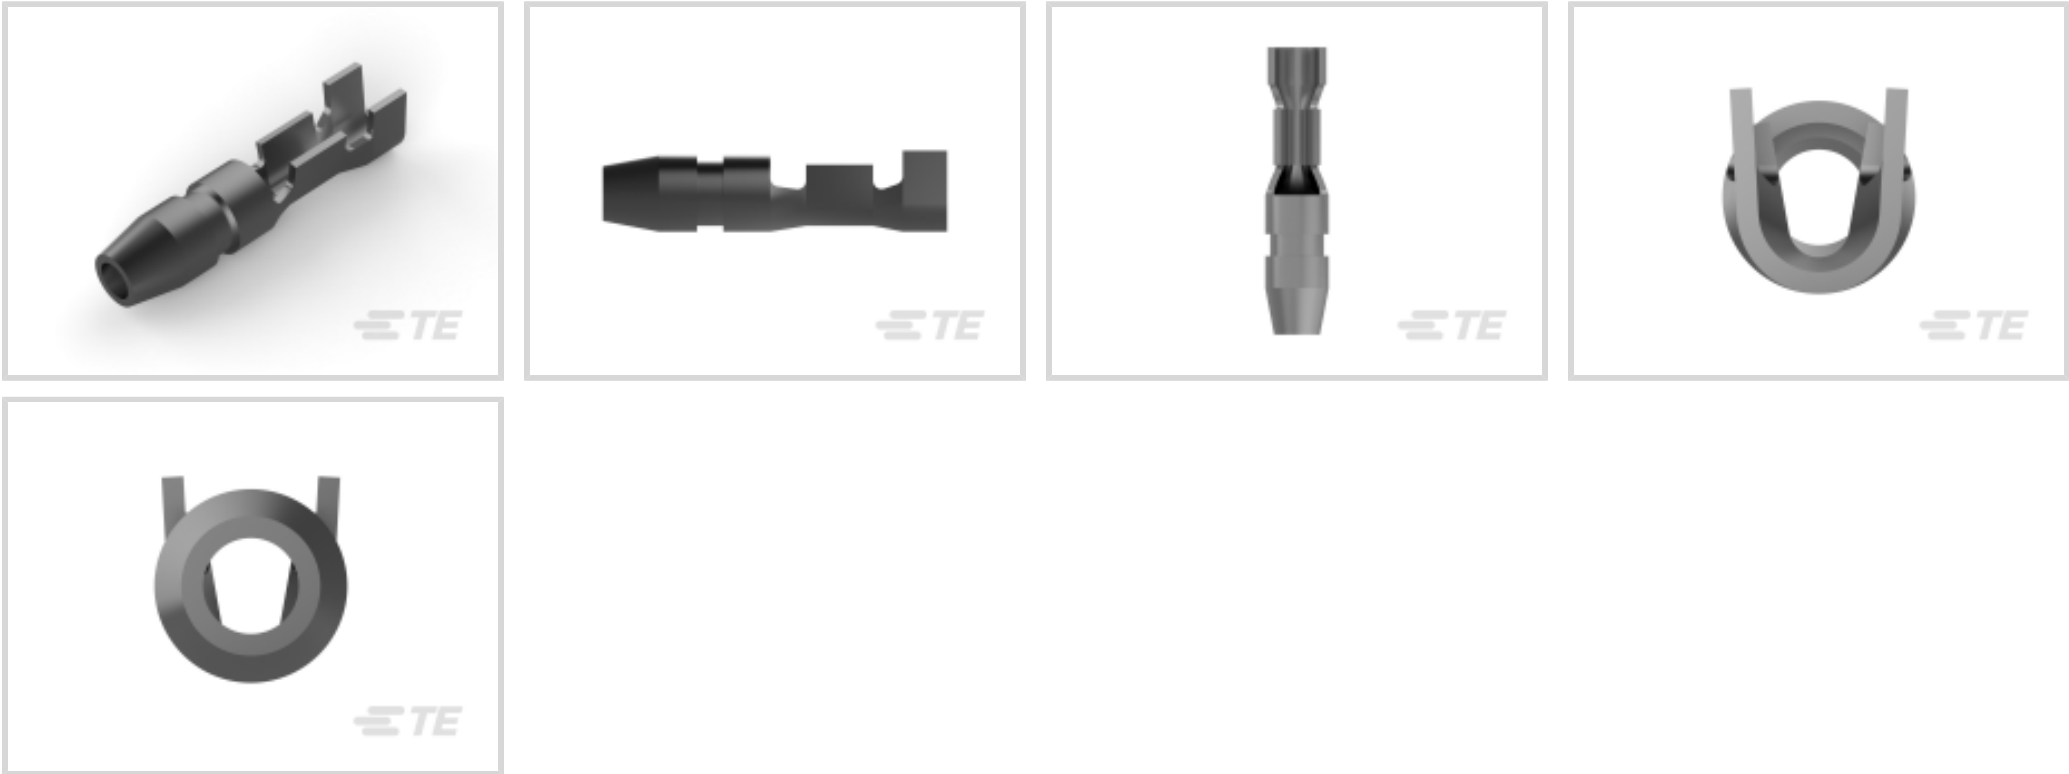

Crimp Wire Terminal Type: **Shur-Plug**  
Mating Pin Diameter: **3.96 mm [ .156 in ]**  
Compatible Insulation Diameter Range: **2.41 – 2.92 mm, 2.92 mm [ .095 – .115 in, .115 in ]**  
Wire Size: **.5 – 1.3 mm<sup>2</sup>**

Features

Product Type Features

|                                    |                 |
|------------------------------------|-----------------|
| Compatible With Discrete Wire Type | Solid, Stranded |
|------------------------------------|-----------------|

Configuration Features

|                                   |               |
|-----------------------------------|---------------|
| Compatible With Wire & Cable Type | Discrete Wire |
|-----------------------------------|---------------|

Contact Features

|                           |                  |
|---------------------------|------------------|
| Crimp Wire Terminal Type  | Shur-Plug        |
| Mating Pin Diameter       | 3.96 mm[.156 in] |
| Barrel Type               | Open             |
| Terminal Plating Material | Tin              |
| Terminal Orientation      | Straight         |

Mechanical Attachment

|                         |      |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|

Dimensions

|                                      |                                                  |
|--------------------------------------|--------------------------------------------------|
| Compatible Insulation Diameter Range | 2.41 – 2.92 mm, 2.92 mm[.095 – .115 in][.115 in] |
|--------------------------------------|--------------------------------------------------|



|                             |                                 |
|-----------------------------|---------------------------------|
| Wire Size                   | 1021 – 2582 CMA                 |
| Barrel Inside Diameter      | 1.27 mm, 2.54 mm[.05 in][.1 in] |
| Terminal Material Thickness | .46 mm[.018 in]                 |
| Overall Product Length      | 18.03 mm[.71 in]                |

Usage Conditions

|                             |                           |
|-----------------------------|---------------------------|
| Insulation Option           | Uninsulated               |
| Operating Temperature Range | -40 – 85 °C[-40 – 185 °F] |

Packaging Features

|                    |       |
|--------------------|-------|
| Packaging Quantity | 12000 |
| Packaging Method   | Reel  |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2024 (240)<br>Candidate List Declared Against: JAN 2024 (240)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                           |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                  |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 60017-3  
RIGHT ANGLE SHUR PLUG REC 20-16  
0.41 BR

TE Part # 2150386-2  
OCEAN\_2.0\_APPLICATOR-E-090F140F

TE Part # 7-2150386-2  
OCEAN\_2.0\_APPLICATOR-E-090F140F

KIT  
TE Part # 7-2150386-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-090F140F

Also in the Series | SHUR-PLUG 156

Crimp Wire Pins, Tabs & Ferrules(29)

Special Purpose Terminals(1)

Customers Also Bought

TE Part #HD14-3-96P  
INL REC ASM

TE Part #DTM06-08SB  
PLG, 8P, BLK, N, B

TE Part #170887-1  
SLEEVE DIA5 SHUR PLUG NAT

TE Part #170887-3  
IS SHUR PLG 5 DIA NAT

TE Part #60799-5  
SHUR PLUG 180 RECEPTACLE 18-14  
AWG TPBR

TE Part #1742039-1  
SHUR PLUG .156 DIA REC 10-14 AWG  
PTPBR

TE Part #1-1879352-5  
RR02 5% 1R2 AMMO

TE Part #1-1879352-8  
RR02 5% 1R6 AMMO

TE Part #170889-1  
SLEEVE DIA5 SHUR PLUG NAT

TE Part #3-180916-0  
FF 250 TAB HSG 1P NYLON NAT



Documents

Product Drawings

SHUR PLUG 156 20-16 AWG PTPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_61388-1\_T1.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_61388-1\_T1.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_61388-1\_T1.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English