




© 2025 TE Connectivity. All Rights Reserved.

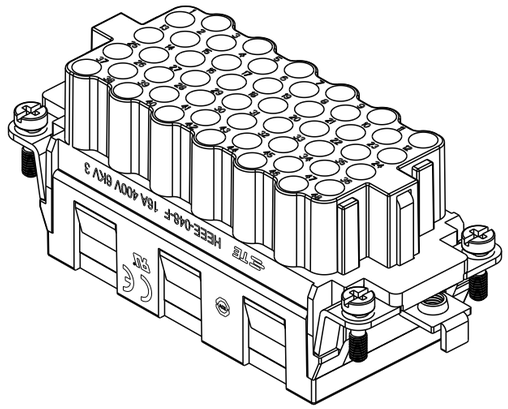

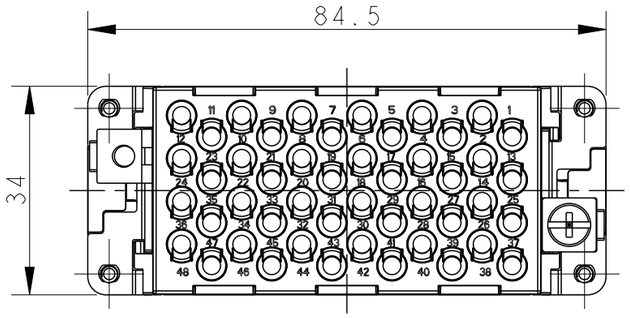




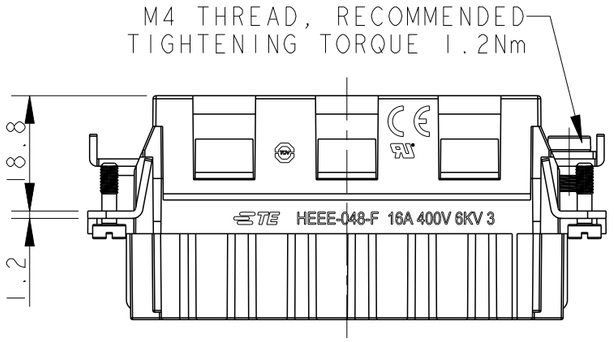

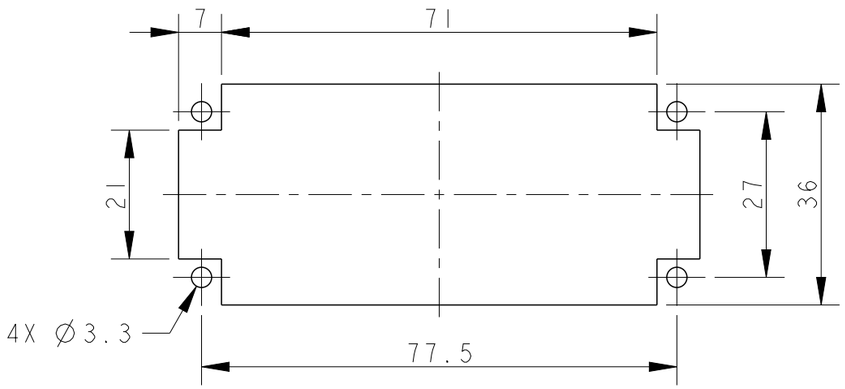

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS

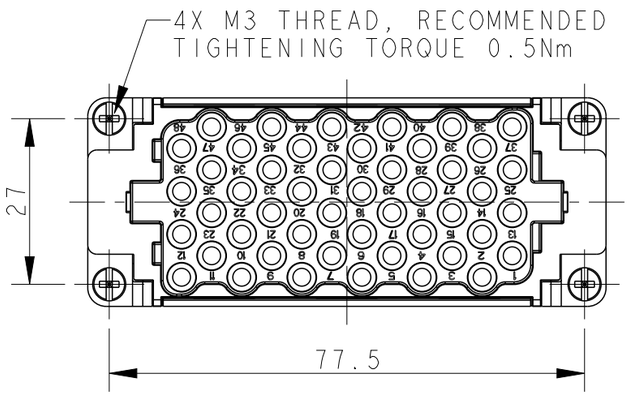

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	18DEC2014	HMR	CW
	B	ECR-15-015267	20OCT2015	DW	CW
	C	ECR-21-111798	03SEP2021	WQR	CW
	D	ECR-25-246912	27JUN2025	ABS	RB

NOTES:
1. TECHNICAL CHARACTERISTICS:
   INSULATION MATERIAL: PC
   RATED VOLTAGE: 400V
   RATED CURRENT: 16A
   INSULATION RESISTANCE: >=400MΩ
   RATED IMPULSE VOLTAGE: 6KV
   POLLUTION DEGREE: 3
   FLAMMABILITY: UL94V-0
   MATING CYCLES: 500 CYCLES
   OPERATION TEMPERATURE: -40°C~+125°C
   WIRE RANGE: 0.14mm²~4mm² (AWG26-AWG12)
   CONTACT TYPE: CRIMP CONTACT
2. CONTACTS NEED TO BE ORDERED SEPARATELY.
   (ORDER No. REFER TO DRAWING:T20300X20XX000)

注释：
1. 技术参数：
   绝缘材料： PC
   额定电压： 400V
   额定电流： 16A
   绝缘电阻： >=400MΩ
   脉冲电压： 6KV
   污染等级： 3
   阻燃等级： UL94V-0
   插拔次数： 500次
   工作温度： -40°C~+125°C
   接线范围： 0.14mm²~4mm² （AWG26-AWG12）
   接线类型： 冷压接
2. 端子需要单独订购.
   （订货号参考图面： T20300X20XX000）

HEEE-048-F	T2050482201-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-

MATERIAL	FINISH
-	-
-	-

DWN	18DEC2014 RAGHAVENDRA H M
CHK	18DEC2014 CHRIS WANG
APVD	18DEC2014 XU XIANG
PRODUCT SPEC	108-137068
APPLICATION SPEC	114-137068
WEIGHT	-

TE Connectivity

NAME HEEE-048-F

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2050482201000	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV D

1470-19 (3/13)