




Connectors > PCB Connectors > PCB Headers & Receptacles

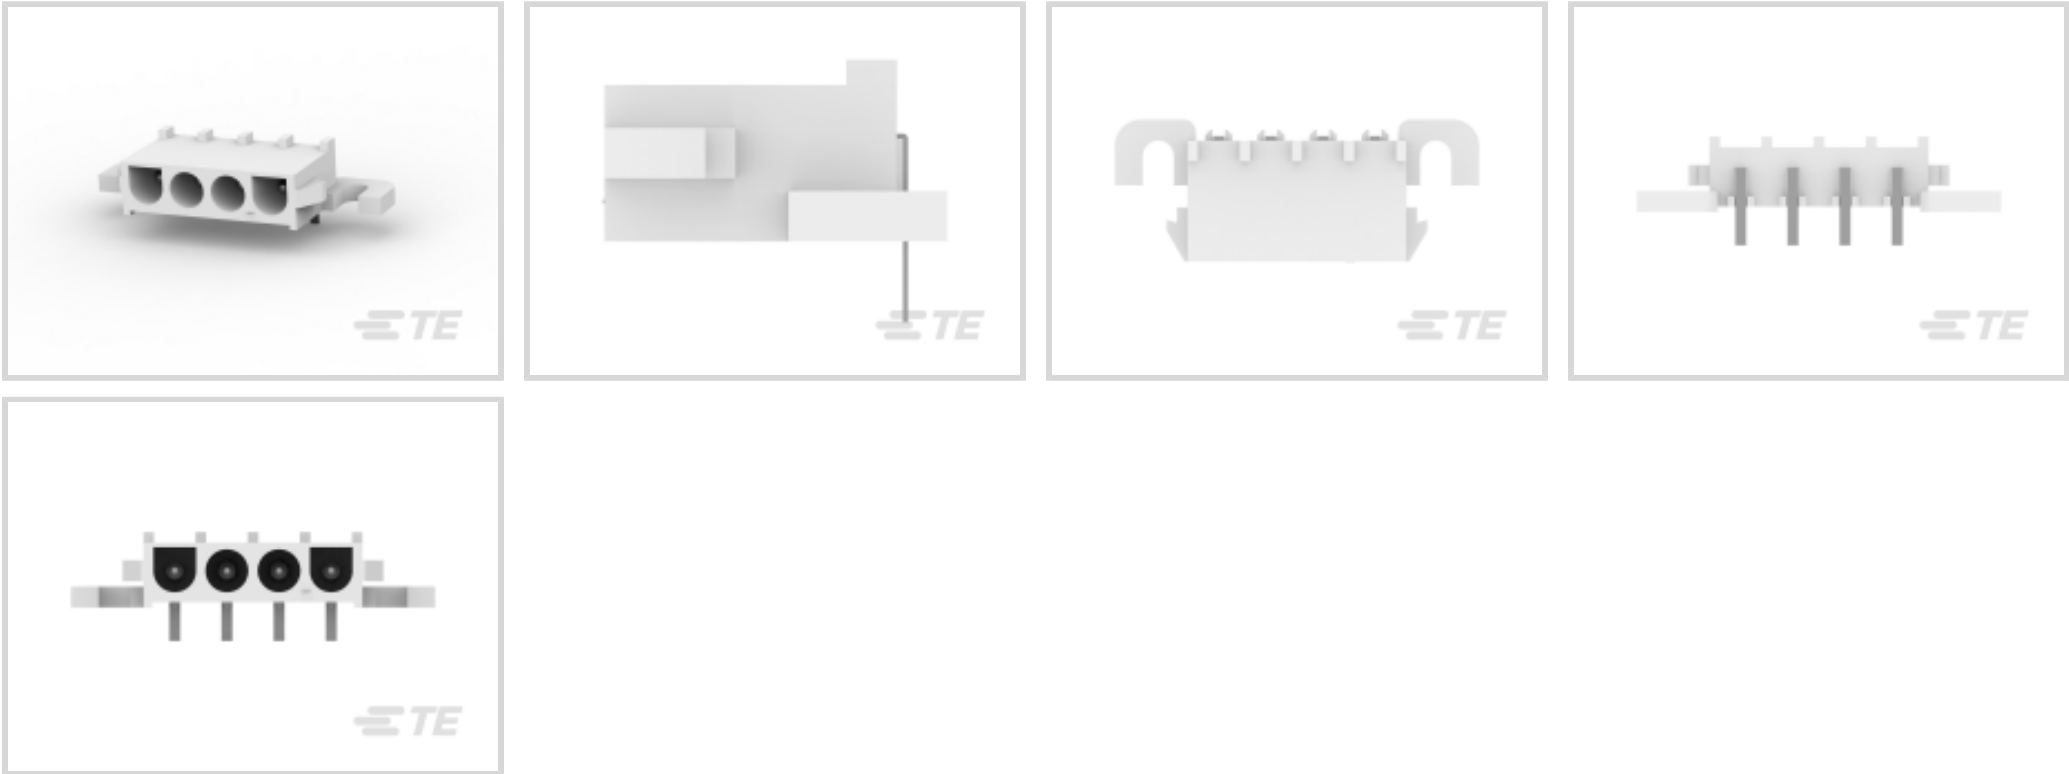

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Right Angle**

Connector System: **Wire-to-Board**

Number of Positions: **4**

Centerline (Pitch): **6.35 mm [.25 in]**

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Columns	4
Number of Loaded Positions	4
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Right Angle
Number of Positions	4



Number of Rows	1
Number of Power Positions	4

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Underplating Material	Nickel
Mating Pin Diameter	2.18 mm[.085 in]
Contact Underplating Material Thickness	1.27 – 1.79 μm[50 – 70 μin]
Contact Size	2.175mm
PCB Contact Termination Area Plating Material Thickness	3.81 – 5.08 μm[150 – 200 μin]
Contact Shape & Form	Round
Contact Layout	Inline
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Pre-Tin
Contact Mating Area Plating Material Thickness	3.81 – 5.08 μm[150 – 200 μin]
Contact Type	Pin
Contact Current Rating (Max)	12 A
PCB Contact Termination Area Plating Material	Pre-Tin

Termination Features

Termination Post & Tail Length	4.06 mm[.16 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Panel Mount Feature	Without
Mating Retention Type	Locking Tab
Mating Alignment Type	Polarization
PCB Mount Retention Type	Mounting Ears
PCB Mount Alignment	Without
Mating Retention	With
PCB Mount Retention	With
Connector Mounting Type	Board Mount



Mating Alignment	With
------------------	------

Housing Features

Mating Entry Location	Side
Centerline (Pitch)	6.35 mm[.25 in]
Housing Material	Nylon

Dimensions

Connector Width	17.27 mm[.68 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
Connector Height	9.14 mm[.36 in]
Connector Length	44.32 mm[1.74 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL, VDE
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-2

Packaging Features

Packaging Quantity	140
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250)



Candidate List Declared Against: JUNE 2025 (250)
Does not contain REACH SVHC

Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	--

Solder Process CapabilityWave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1-350589-0
STR/REL CLAMP NATL

TE Part # 1586872-1
04P UMNL HDR ASSY, GW

TE Part # 641775-1
04P UMNL STR/REL & INSRT NATL

TE Part # 641775-2
04P UMNL STR/REL NATL

TE Part # 641968-4
4P UMNL PIN HDR POL VO, AU, LF


TE Part # 1-480702-0
04P UMNL PLUG HSG NATL

TE Part # 1586086-1
04P UMNL PIN HDR ASSY W/O DRNS

TE Part # 1586163-1
04P UMML PIN HDR 94VO NDH



TE Part # 1586892-1
03P UMNL HDR ASSY R/A, GW

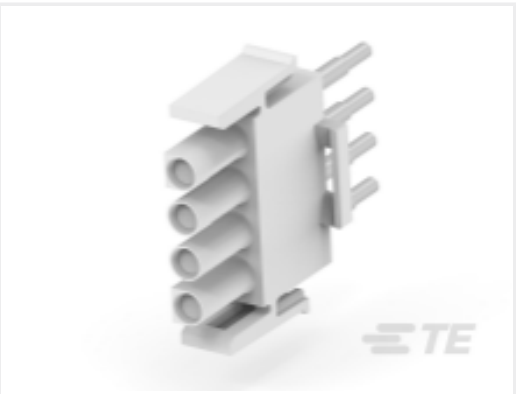

TE Part # 350848-4
04P UMNL PLUG TEST ASSY 94VO



TE Part # 350811-1
STR/REL CLAMP



TE Part # 1586963-1
04P UMNL PIN HDR ASSY, GW



TE Part # 641776-2
04P UMNL STR/REL



TE Part # 641968-3
04P UMNL PIN HDR ASSY POL 94VO



TE Part # 794273-1
04P UMNL INTERFACE SEAL



TE Part # 794274-1
04P UMNL WIRE SEAL



TE Part # 926305-6
UNML4WAY CAP



TE Part # 1586845-1
04P UMNL CAP HSG NATL, GW



TE Part # 1586936-1
06P UMNL HDR ASSY R/A, GW



TE Part # 1969805-1
04P UMNL HDR ASSY R/A, PIN V0 GW

Also in the Series | Universal MATE-N-LOK



Circular Power Connectors(2)



Connector Contacts(206)



Connector Hardware(12)



Power Contacts(206)



Rectangular Power Connectors(642)



Standard Circular Connectors(1)

Customers Also Bought



TE Part #6-146256-2
24 MODII HDR DRST B/A .100CL LF




TE Part #CAT-SIGH262
Signal Header



TE Part #1462039-4
IM13GR=IM RELAY 100mW 5V




TE Part #1871058-1
PCI EXPRESS CONN. EON TYPE, 36P, L=2.0

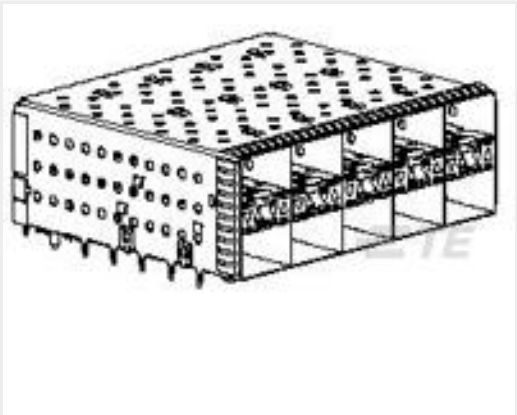


TE Part #2132403-5
2X5 SFP+ w/ Springs, 4 LP Sn




TE Part #6-2176231-7
3522 5K6 1% 3W

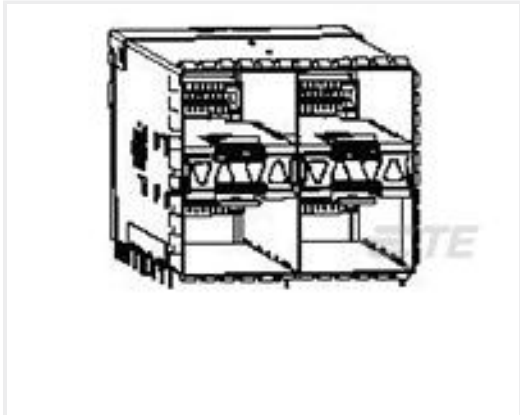

TE Part #2198325-6
zSFP+ STACKED 2X2 RECEPTACLE ASSEMBLY

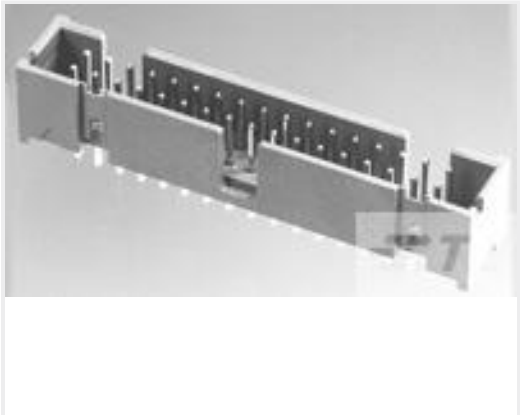

TE Part #5104338-7
A/L LOW PRO HDR 34P VERT HT

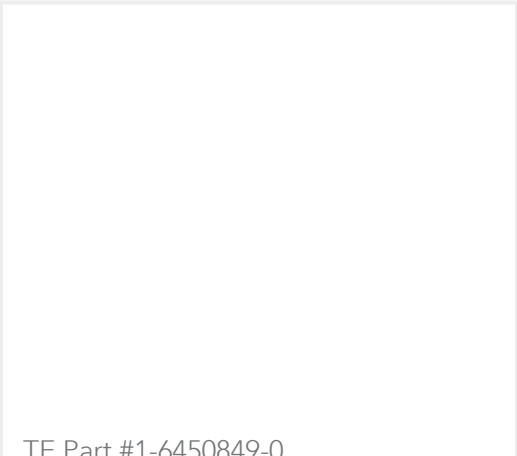

TE Part #1-6450849-0
MBXLE R/A HEADER 2P

Documents

Product Drawings

04P UMNL HDR ASSY R/A V2 NATL

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_1-350948-0_M.3d_igs.zip

English

Customer View Model

ENG_CVM_1-350948-0_M.3d_stp.zip

English

Customer View Model

ENG_CVM_1-350948-0_M.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL

English