

Features

Type 200V V_{RRM}
Isolation Type Package
Electrically Isolation base plate


Maximum Ratings

Operating Temperature : -55 °C to +175 °C
Storage Temperature : -55 °C to +175 °C

Electrical Characteristics @ 25 Unless Otherwise Specified.

Average Forward
Current (Per pkg) I

Pulse Test: Pulse Width 300 μ sec, Duty < 2%

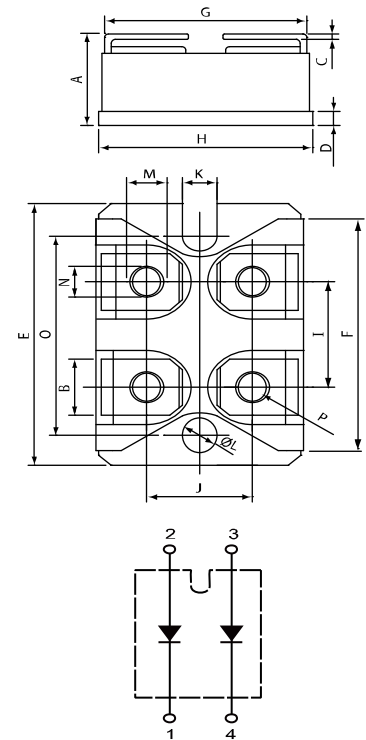

DIM	DIMENSIONS		
	INC	MM	
A	.519	12.70	13.20
B	.322	7.80	8.20
C	.033	.75	.84
D	.082	1.95	2.10
E	1.502	37.80	38.20
F	1.258	31.75	32.00
G	.956	23.65	24.30
H	1.007	25.30	25.60
I	.594	14.90	15.10
J	.516	12.50	13.10
K	.169	4.10	4.30
L	.161	.169	4.10
M	.181	.191	4.60
N	.165	.177	4.20
O	1.184	1.192	30.10
P		M4*8	

Figure .1- Typical Forward Characteristics

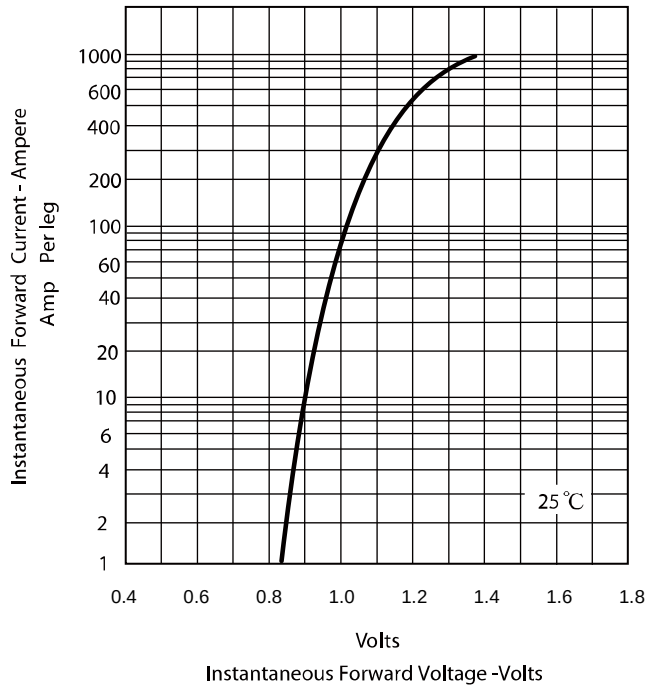


Figure.2 - Forward Derating Curve

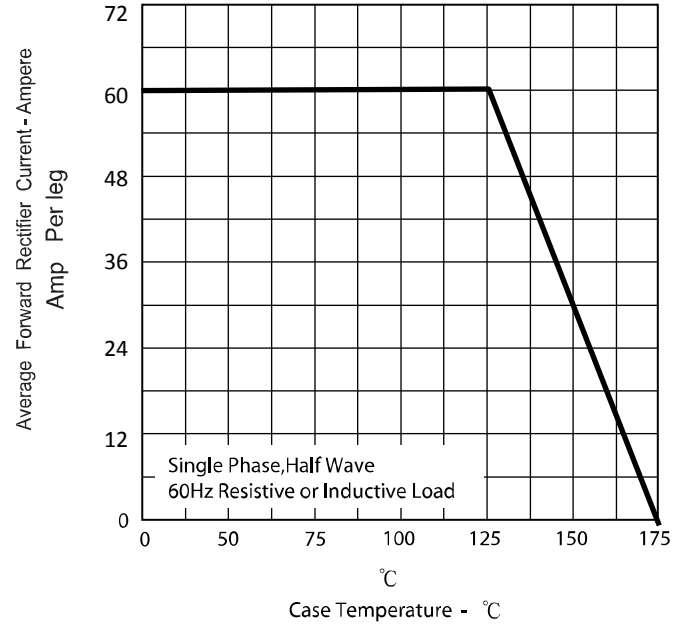


Figure.3 - Peak Forward Surge Current


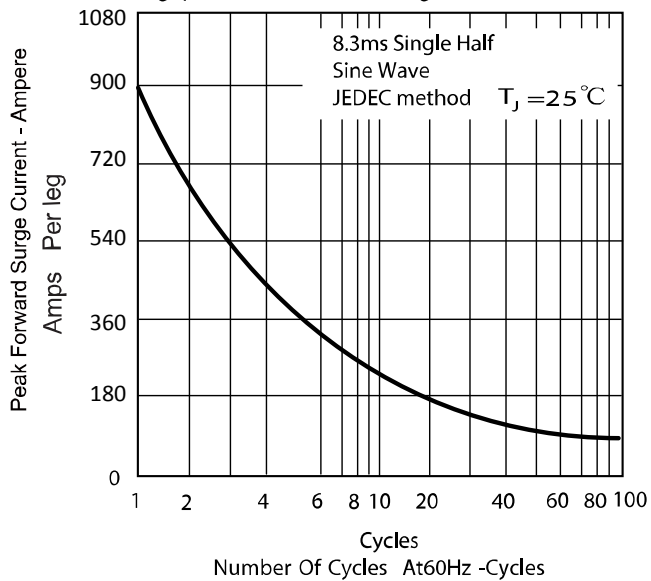


Figure .4 -Typical Reverse Characteristics

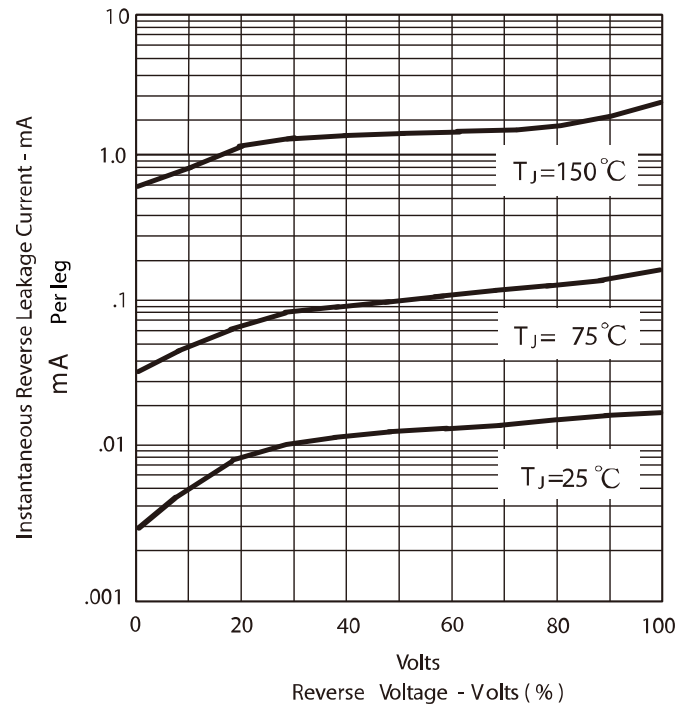

Revision History

Date	Revision	Notes
8/10/2014	1.0	Initial release
01/03/2020	1.1	Applied company name change