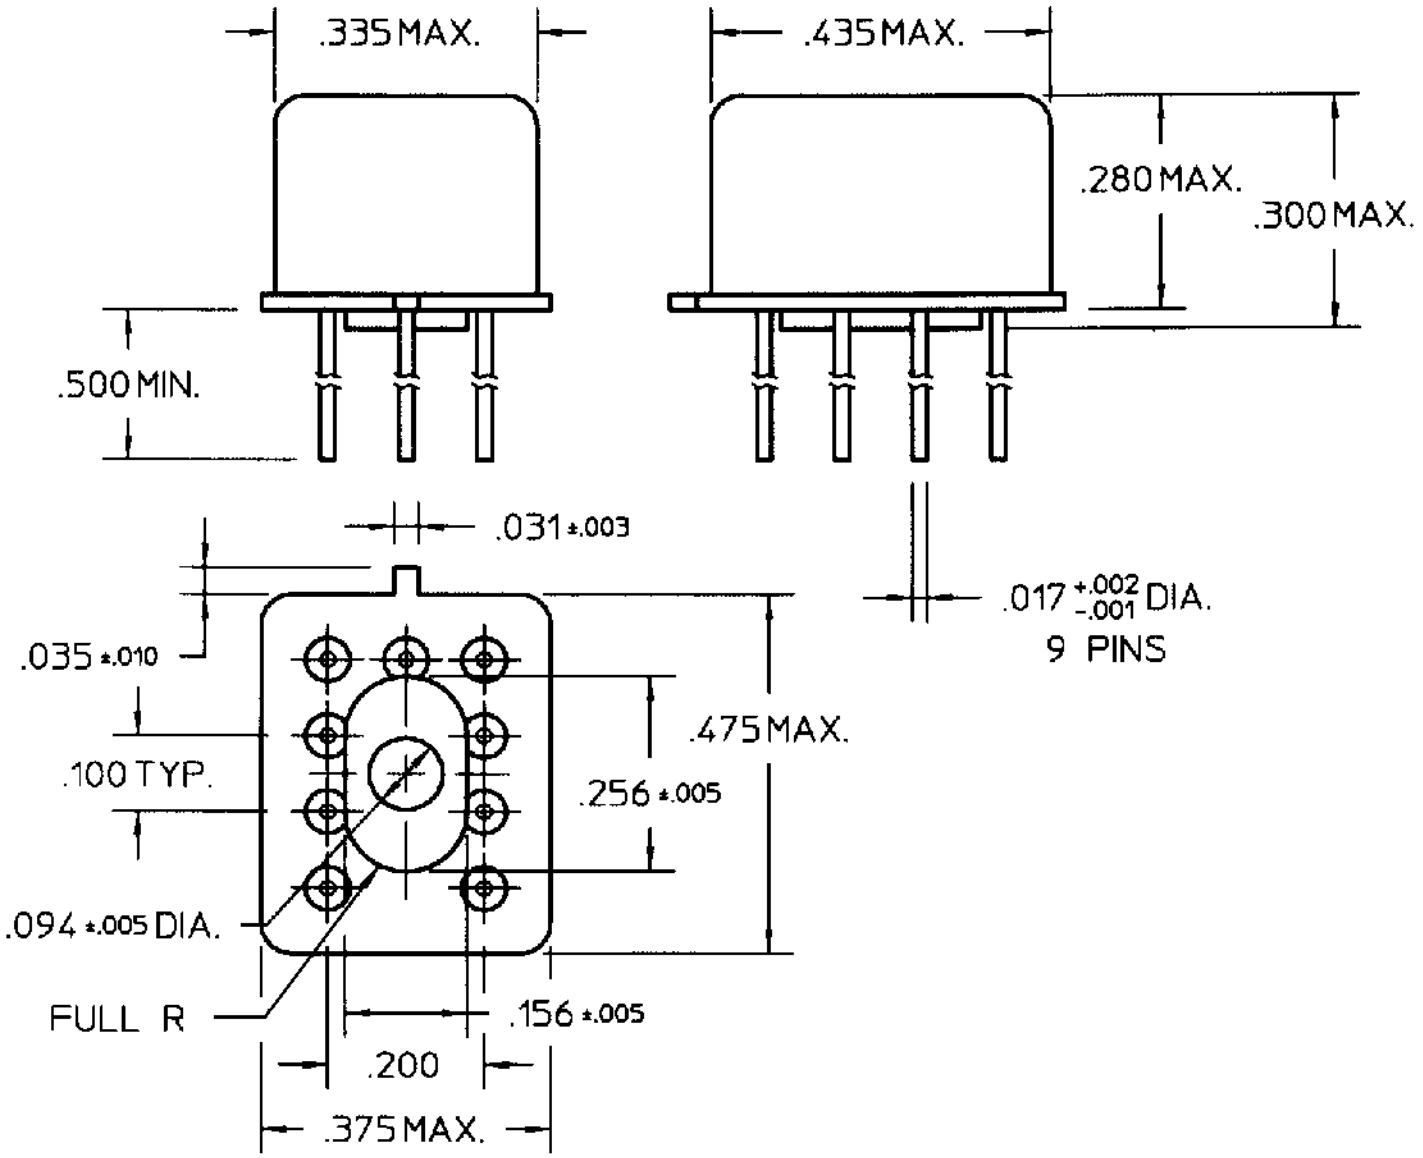


COIL: @ 25°C

RESISTANCE	1560 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.2 VDC
GATE TURN-ON	4.3 VDC MAX.
GATE TURN-OFF	0.5 VDC MAX.
MUST RELEASE	8.0 VDC MAX, 1.30 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.5 MS MAX.
RELEASE TIME 4.0 MS MAX.
CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET

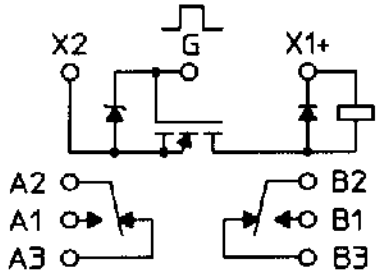

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 9/3/98 CK JERRY 9/3/98

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M28776/6-012M

TYPE JMGAT RELAY

JMGAT-26MW