1473565-8 ✔ ACTIVE

RITS | RITS Header Connectors PCB Mount

TE Internal #: 1473565-8

PCB Mount Header, Vertical, Wire-to-Board, 8 Position, 2 mm [.078 in] Centerline, Partially Shrouded, Gold (Au), RITS Header Connectors PCB Mount

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Number of Positions: **8**

Centerline (Pitch): **2 mm [.078 in]**

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Columns	1
Number of Loaded Positions	8
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Vertical
Number of Positions	8
Number of Rows	1

Electrical Characteristics

Operating Voltage	32 VDC

Body Features

Primary Product Color	Black

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 µm[50 µin]
PCB Contact Termination Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material Thickness	2 µm[78.74 µin]
Contact Layout	Inline
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold (Au)
Contact Mating Area Plating Material Finish	Bright
Contact Mating Area Plating Material Thickness	.2 µm[7.87 µin]
Contact Type	Pin
Contact Current Rating (Max)	3 A

Termination Features

Rectangular Termination Post & Tail Width	.6 mm[.023 in]
Rectangular Termination Post & Tail Thickness	.2 mm[.007 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Alignment Type	Polarization
PCB Mount Alignment	With
Mating Retention	Without
PCB Mount Retention	Without
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Centerline (Pitch)	2 mm[.078 in]
Housing Material	Thermoplastic

Dimensions

Connector Width	6.4 mm[.251 in]
Connector Height	13 mm[.511 in]
Connector Length	23.8 mm[.937 in]

Usage Conditions

Operating Temperature Range	-30 – 75 °C[-22 – 167 °F]

Operation/Application

Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	1600
Packaging Method	Tube

Compatible Parts



TE Part # 1-2295044-8
RITS CONN. PLUG ASSY 8P RED TIN



TE Part # 3-2295044-8
RITS CONN. PLUG ASSY 8P ORANGE TIN



TE Part # 1473562-8
RITS CONN. PLUG ASSY 8P YELLOW



TE Part # 3-1554809-8
RITS CONN.PLUG ASSY 8P ORANGE COVER



TE Part # 2-1473562-8
RITS CONN. PLUG ASSY 8P BLUE

Also in the Series | RITS Header Connectors PCB Mount

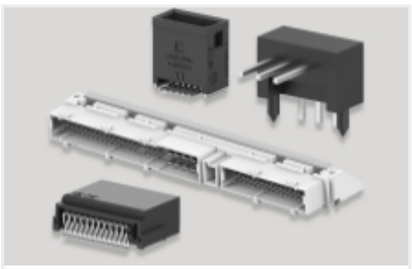

PCB Headers & Receptacles(13)



Rectangular Power Connectors(1)

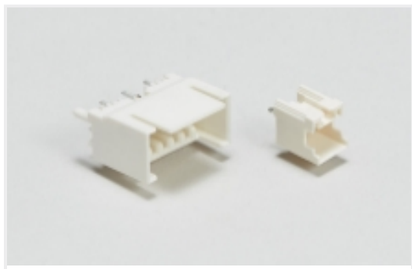

Wire-to-Board Headers & Receptacles (13)

Customers Also Bought



TE Part #CAT-D9934-A75F
Header Assembly: Wire-to-Board, 15A, gold or tin plated



TE Part #CAT-D9934-A75E
Header Assembly: Wire-to-Board, 15A, gold or tin plated



TE Part #CAT-D9934-A83B
Header Assembly: Wire-to-Board, 20-45A, 250-630V



TE Part #1473567-3
RITS CONN.HDR ASSY 4ROW 3P



TE Part #1-1827872-4
DYNAMIC 1100D HDR ASSY V 28P XBLACK GOLD



TE Part #CAT-D9934-A15F
Header Assembly: Wire-to-Board, 5A, gold or tin plated

Documents

Product Drawings

RITS CONN.HDR ASSY 8P

Japanese

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_1473565-8_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_1473565-8_B.3d_igs.zip

English

Customer View Model

ENG_CVM_1473565-8_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

Remote Input Output Terminal System (RITS) Connectors

English

Product Specifications

Standard Operating Procedure

Japanese

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

RITS Connector Interconnection System/e-CON Connector

Japanese

Agency Approvals

UL Report

English