
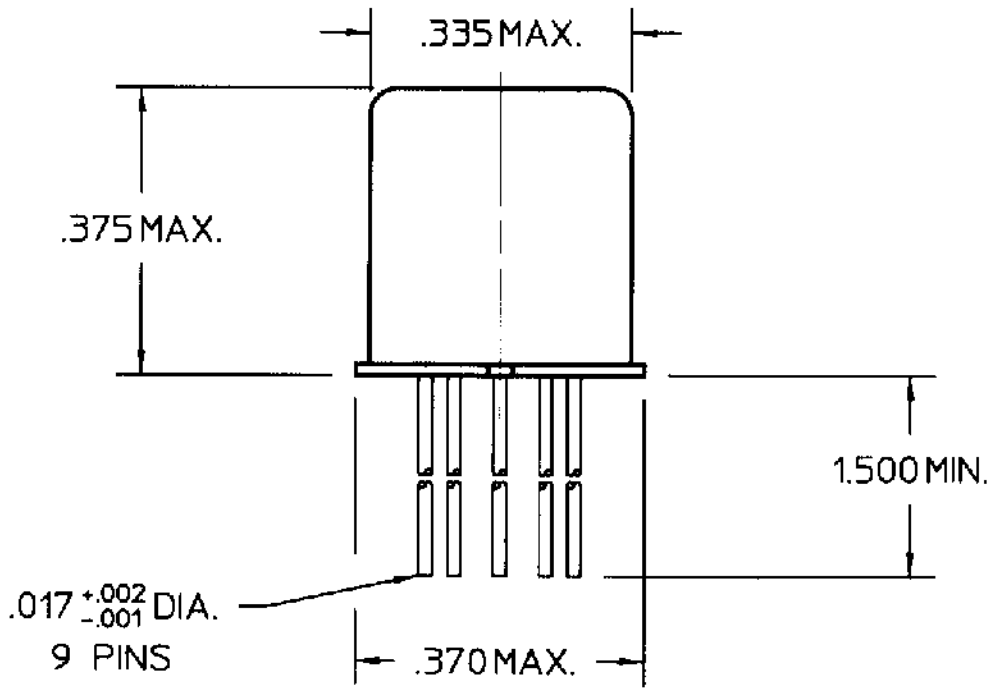


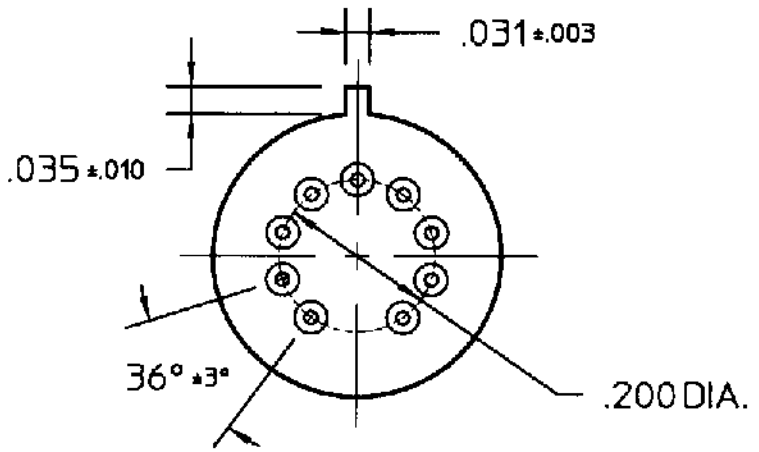

REV. 0 DCO 140782

COIL: @ 25°C

RESISTANCE	1600 OHMS ± 10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE VOLTAGE	10.0 VDC
TURN-ON BASE CURRENT	0.09 mADC
MUST RELEASE	6.0 VDC MAX, 0.91 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: TURN-ON TIME 4.0 MS MAX
TURN-OFF TIME 7.5 MS MAX
CONTACT STABILIZATION TIME 2.0 MS MAX

CUST. QPL
CUST. NO. M28776/3-021P

TYPE JMST RELAY

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 12/3/98 CK. 12/4/98

COMMUNICATIONS INSTRUMENTS, INC.

JMSWT-18XP