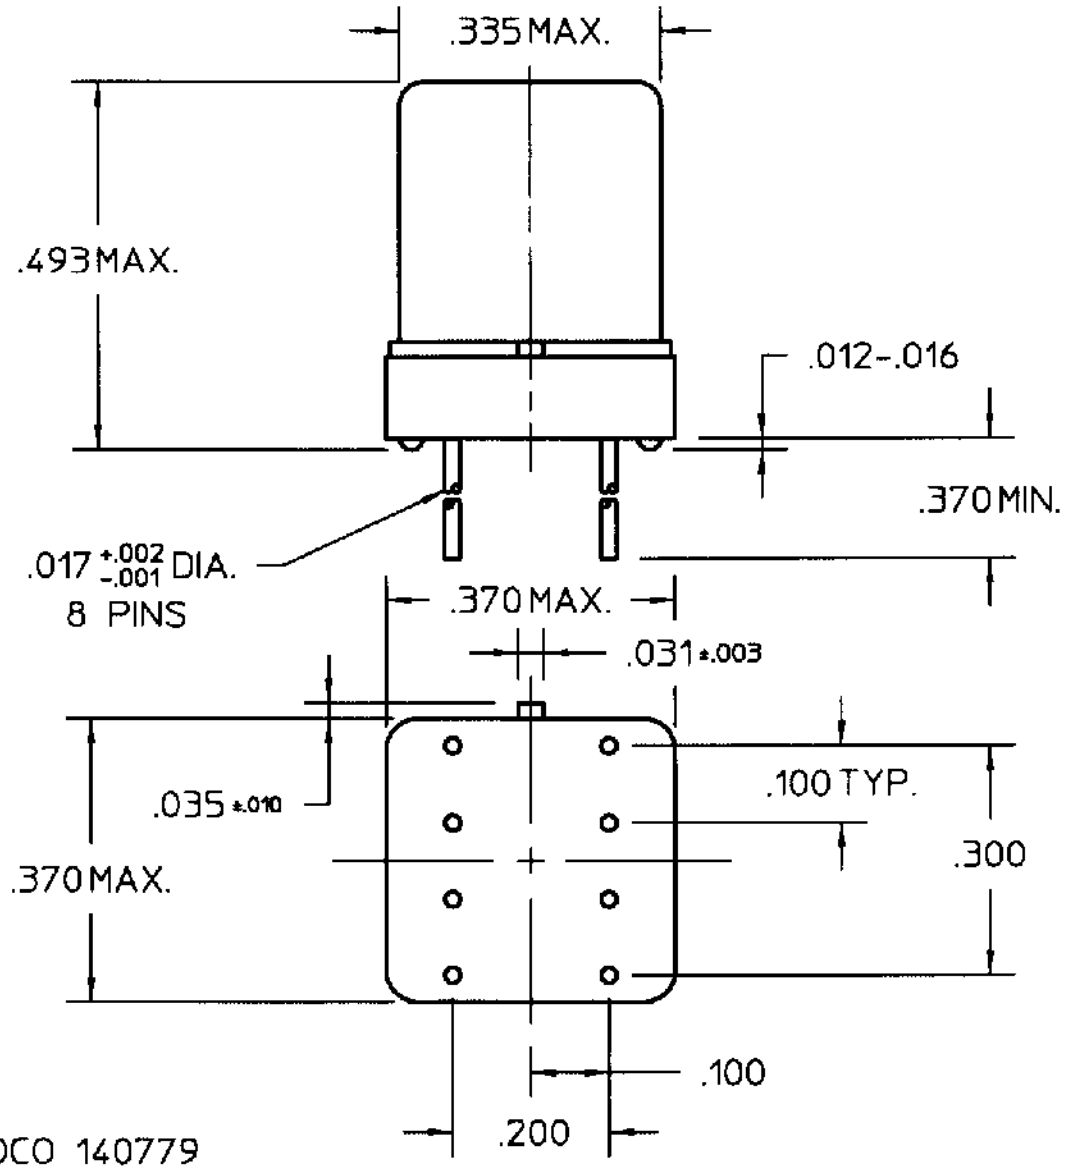


REV. 0 DCO 140779

COIL: @ 25°C

RESISTANCE	3300 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	15.2 VDC
MUST RELEASE	10.8 VDC MAX, 1.7 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4 MS MAX
RELEASE TIME 7.5 MS MAX
CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 12/3/98 CK. 12/4/98

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/21-046L

TYPE JMSDD RELAY

JMSCDD-26XLS