HD36-24-19PN-059 ✔ ACTIVE

DEUTSCH | DEUTSCH HD, DEUTSCH HD30

TE Internal #: HD36-24-19PN-059

12 V / 24 V, 19 Position, Automotive Housing for Male Terminals, Wire-to-Wire, Sealable, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid

View on TE.com >

Automotive Parts > Automotive Connectors > Automotive Housings > DEUTSCH HD30 Housings







Nominal Voltage Architecture: **12 V, 24 V**

Connector & Housing Type: **Housing for Male Terminals**

Number of Positions: **19**

Sealable: **Yes**

Operating Temperature Range: **-55 – 125 °C [-67 – 257 °F]**

All DEUTSCH HD30 Housings (358)

Features

Product Type Features

Mixed & Hybrid Connector	Yes
Connector Shape	Circular
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Primary Locking Feature	Contact Retainer
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Blank Cavity Position	0
Connector Modification	Cable Clamp
Connector Seal Code	N Seal
Number of Positions	19

Electrical Characteristics

Operating Voltage	250 VDC
Nominal Voltage Architecture	12 V, 24 V

Body Features

Cable Exit Angle	180°

Contact Features

Contact Size	Size 12, Size 16
Contact Type	Pin
Mating Pin Diameter	1.6 mm, 2.4 mm[.063 in][.094 in]
Contact Current Rating (Max)	13 A, 25 A

Mechanical Attachment

Strain Relief	With
Terminal Position Assurance	No
Mating Alignment Type	Guide Slot
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	Aluminum Alloy

Dimensions

Compatible Insulation Diameter Range	1.4 – 3.8 mm, 2.9 – 4.5 mm[.1 – .134 in][.134 – .17 in]
Product Width	49.3 mm[1.94 in]
Product Length	49.3 mm[1.94 in]
Connector Height	81 mm[3.19 in]

Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operating Temperature (Max)	125 °C[257 °F]

Operation/Application

Circuit Application	Power

Industry Standards

IP Rating	IP67

Packaging Features

Packaging Quantity	1
Packaging Method	Package

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.5% in 27519434139) Decamethylcyclopentasiloxane (D5) (.5% in 27519434139) Octamethylcyclotetrasiloxane (D4) (.5% in 27519434139) **Article Safe Usage Statements:** Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # CAT-D48-ST273
DEUTSCH Solid Contacts



TE Part # CAT-H3930-PC8382
Plug Protective Caps - DEUTSCH HD30



TE Part # 0413-214-1205
SEALING PLUG, SIZE 12, KEYING, YEL



TE Part # CAT-D48-SFT273
DEUTSCH Stamped and Formed Contacts



TE Part # CAT-H3930-CH8172
DEUTSCH HD30 Housings

Also in the Series | DEUTSCH HD




Automotive Housings(453)



Automotive Seals & Cavity Plugs(11)



Connector Strain Relief(6)

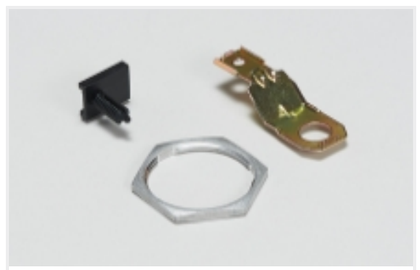

Other Automotive Connector Accessories(12)

Also in the Series | DEUTSCH HD30

Automotive Housings(453)

Automotive Seals & Cavity Plugs(11)

Connector Strain Relief(6)

Other Automotive Connector Accessories(12)

Customers Also Bought



TE Part #HDP26-24-16SN
PLG, 16P, BLK, N, 12, S




TE Part #CAT-H3930-CH8172
DEUTSCH HD30 Housings



TE Part #DRC18-40SA
PLG, 40P, BLK, N, A



TE Part #CAT-J41-DDPC
DEUTSCH DT Plug Connectors

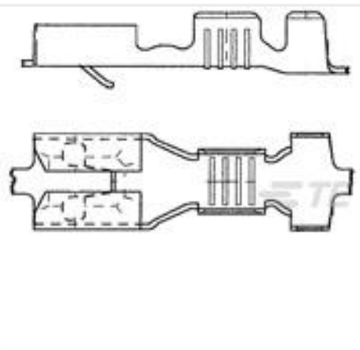

TE Part #282180-3
FF 187 REC 0.5-1.5MM2 TPPB



TE Part #184020-1
2 POS. PLUG ASSY, KEY L, NAT

Documents

Product Drawings

PLG,19P,AL,N,CBLCLMP BT,DRAIN,12/16,P,MC

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_HD36-24-19PN-059_D1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_HD36-24-19PN-059_D1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_HD36-24-19PN-059_D1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

DEUTSCH HD30 & HDP20 CONNECTOR SERIES

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English