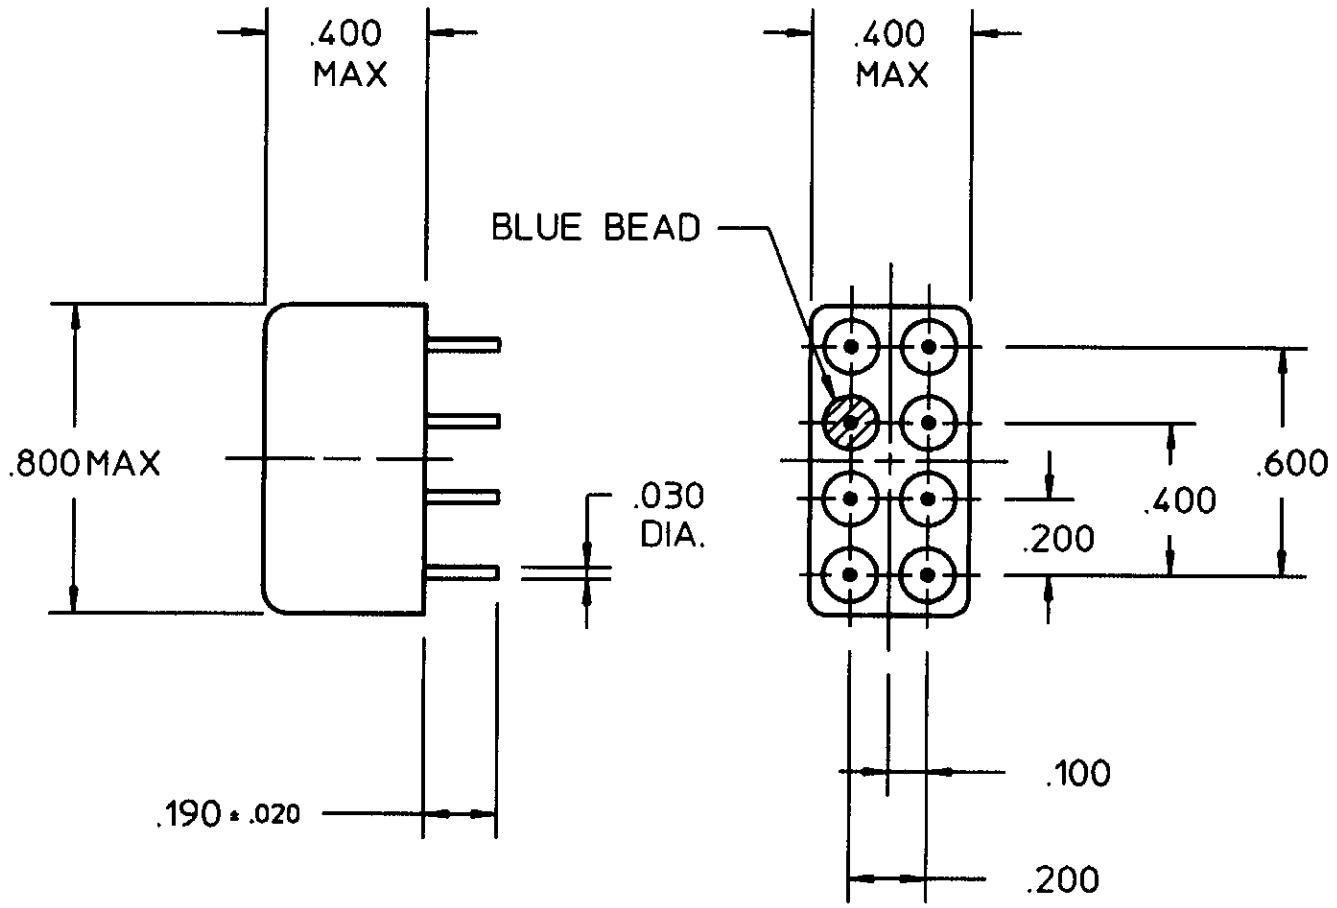



COIL: @ +25 °C

RESISTANCE 180 OHMS ± 10%

NOMINAL VOLTAGE 9.5-15.0 VDC

MUST OPERATE 6.4 VDC

MUST RELEASE 4.0 VDC MAX 0.7 VDC MIN

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX
CONTACT BOUNCE 2 MS MAX

## CUSTOMER DATA SHEET

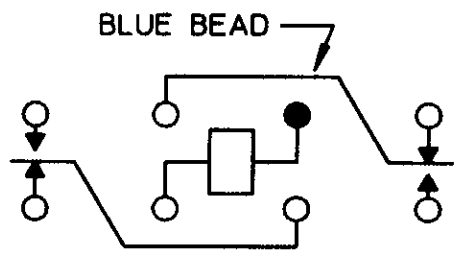


CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 5/22/92 CK. 5/26/92

COMMUNICATIONS INSTRUMENTS, INC.

CUST. GENICOM
CUST. NO. 3SAV5004D1

TYPE "HFW" RELAY

# HFW1201S246