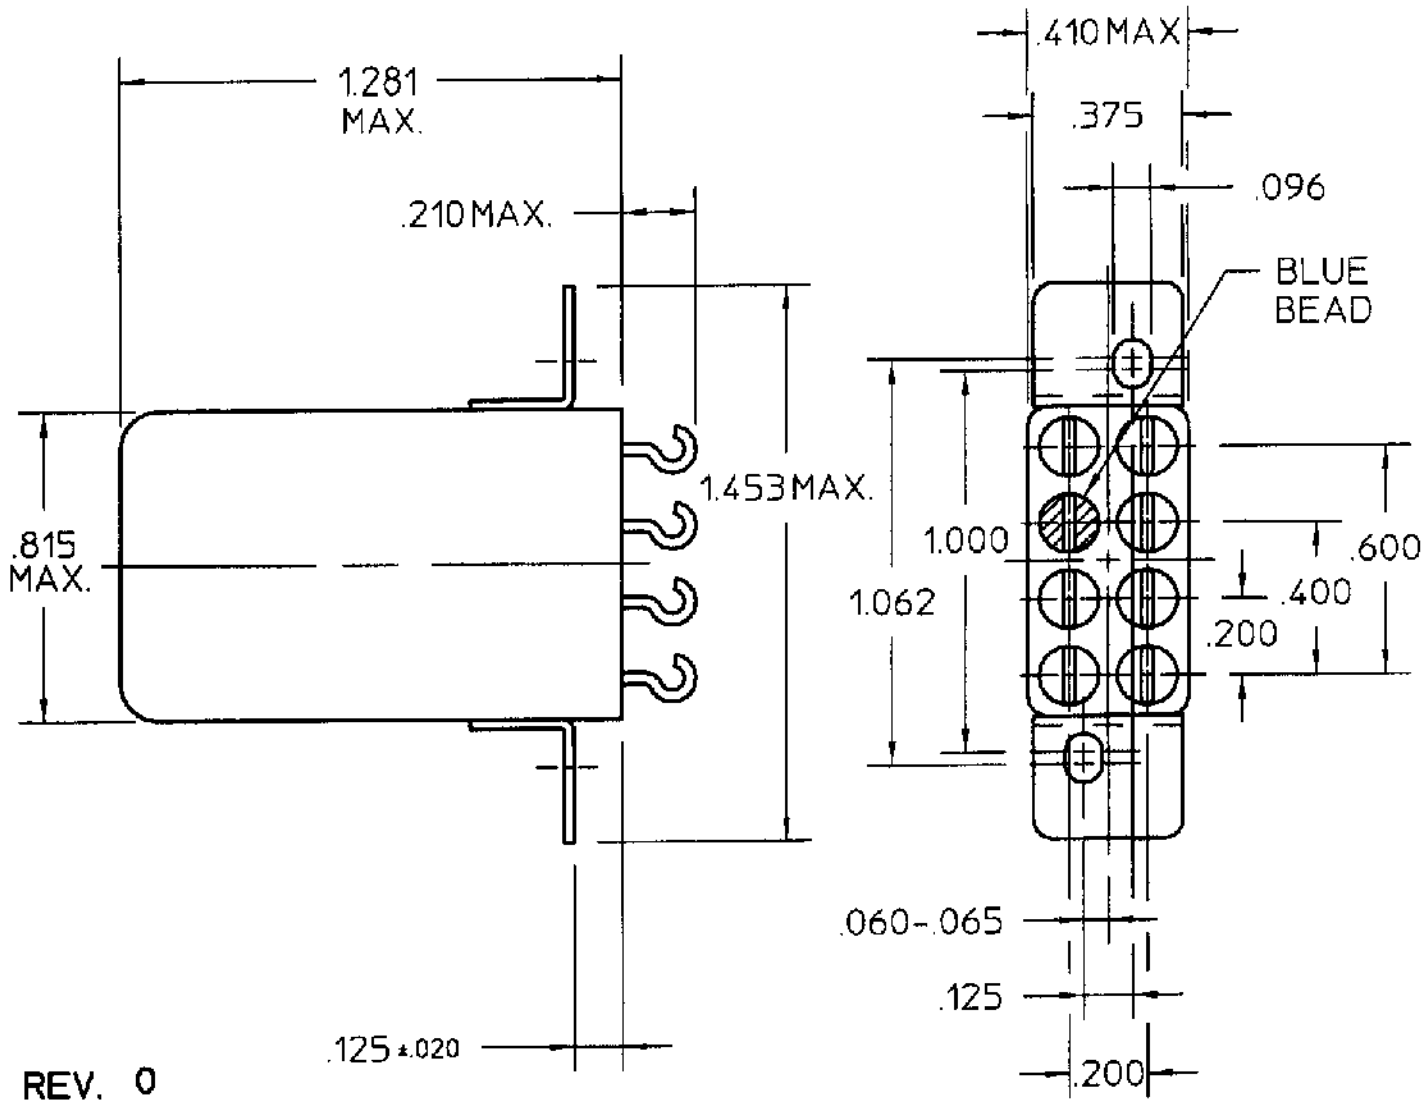


REV. 0
DCO 170352

COIL: @ 25°C


RESISTANCE	2500 OHMS
NOMINAL VOLTAGE	8.0 mADC
MUST OPERATE	4.0 mADC
MUST RELEASE	2.0 mADC MAX, 0.4 mADC MIN

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's
SHOCK 100 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX
RELEASE 10 MS MAX
CONTACT BOUNCE 1 MS MAX

CUSTOMER DATA SHEET

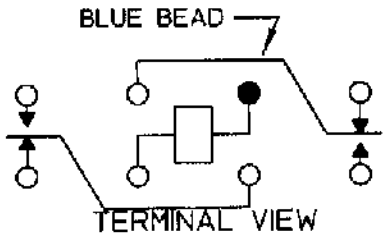

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. PBB 12/14/00 | CK. TLG 12-14-00

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/13-110 REV.

"3SAT" RELAY

3SAT1327A2