
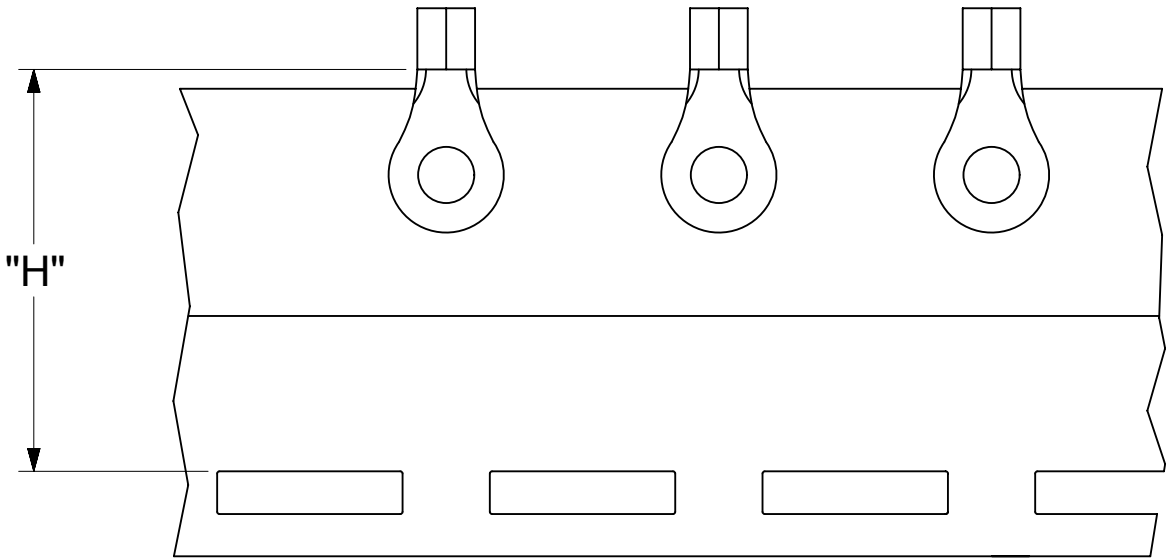


| 12              | 11                 | 10              | 9                  | 8              | 7                   | 6                          | 5            | 4             | 3             | 2             | 1 |
|-----------------|--------------------|-----------------|--------------------|----------------|---------------------|----------------------------|--------------|---------------|---------------|---------------|---|
| LOOSE PIECE     |                    | TAPE MOUNTED    |                    | SPECIFICATIONS |                     |                            |              |               |               |               |   |
| MATERIAL NUMBER | ENGINEERING NUMBER | MATERIAL NUMBER | ENGINEERING NUMBER | STUD SIZE      | "S"<br>±.005 [0.13] | "W"                        | "C"<br>MIN.  | "E"<br>MAX.   | "L"<br>MAX.   | "H"           |   |
| 191930254       | F-366-10           | ---             | ---                | 10             | .198 [5.03]         | .665±.013<br>[16.89±0.33]  | .520 [13.21] | 1.028 [26.11] | 1.385 [35.18] | 1.172 [29.77] |   |
| 191930258       | F-366-12           | ---             | ---                | 12             | .515 [13.08]        |                            |              |               |               |               |   |
| 191930261       | F-366-14           | 191930263       | F-366-14T          | 14             | .265 [6.73]         |                            |              |               |               |               |   |
| 191930264       | F-366-38           | 191930266       | F-366-38T          | 38             | .390 [9.91]         |                            |              |               |               |               |   |
| 191930267       | F-366-56           | 191930269       | F-366-56T          | 56             | .328 [8.33]         |                            |              |               |               |               |   |
| 191930270       | F-366-76           | ---             | ---                | 76             | .453 [11.51]        | .475±.010<br>[12.06±0.25]  | .520 [13.21] | 1.028 [26.11] | 1.288 [32.72] | 1.172 [29.77] |   |
| 191930273       | F-367-10           | 191930274       | F-367-10T          | 10             | .198 [5.03]         |                            |              |               |               |               |   |
| 191930275       | F-367-14           | 191930277       | F-367-14T          | 14             | .265 [6.73]         |                            |              |               |               |               |   |
| 191930278       | F-367-56           | ---             | ---                | 56             | .328 [8.33]         | .885±.010<br>[22.48±0.25]  | .989 [25.12] | 1.497 [38.02] | 1.970 [50.04] | ---           |   |
| 191930281       | F-369-12           | ---             | ---                | 12             | .515 [13.08]        |                            |              |               |               |               |   |
| 191930283       | F-369-38           | ---             | ---                | 38             | .390 [9.91]         |                            |              |               |               |               |   |
| 191930285       | F-369-58           | ---             | ---                | 58             | .656 [16.66]        | 1.260±.010<br>[32.00±0.25] | .989 [25.12] | 1.497 [38.02] | 2.158 [54.81] | ---           |   |
| 191930287       | F-370-12           | ---             | ---                | 12             | .515 [13.08]        |                            |              |               |               |               |   |
| 191930289       | F-370-34           | ---             | ---                | 34             | .781 [19.84]        |                            |              |               |               |               |   |
| 191930291       | F-370-38           | ---             | ---                | 38             | .390 [9.91]         |                            |              |               |               |               |   |
| 191930293       | F-370-58           | ---             | ---                | 58             | .656 [16.66]        |                            |              |               |               |               |   |

NOTES:

1. MATERIAL: COPPER  
PLATING: ELECTRO-TIN (.0003 MIN).
2. BRAZED SEAM
3. WIRE SIZE: 4 AWG  
25 MM²
4. "UL" LISTING #E32244  
"CSA" LISTING #18689
5. ALL DIMENSIONS IN INCHES/[MM].
6. PARTS ARE ROHS COMPLIANT.
7. DIMS. SHOWN ARE FOR REFERENCE ONLY.

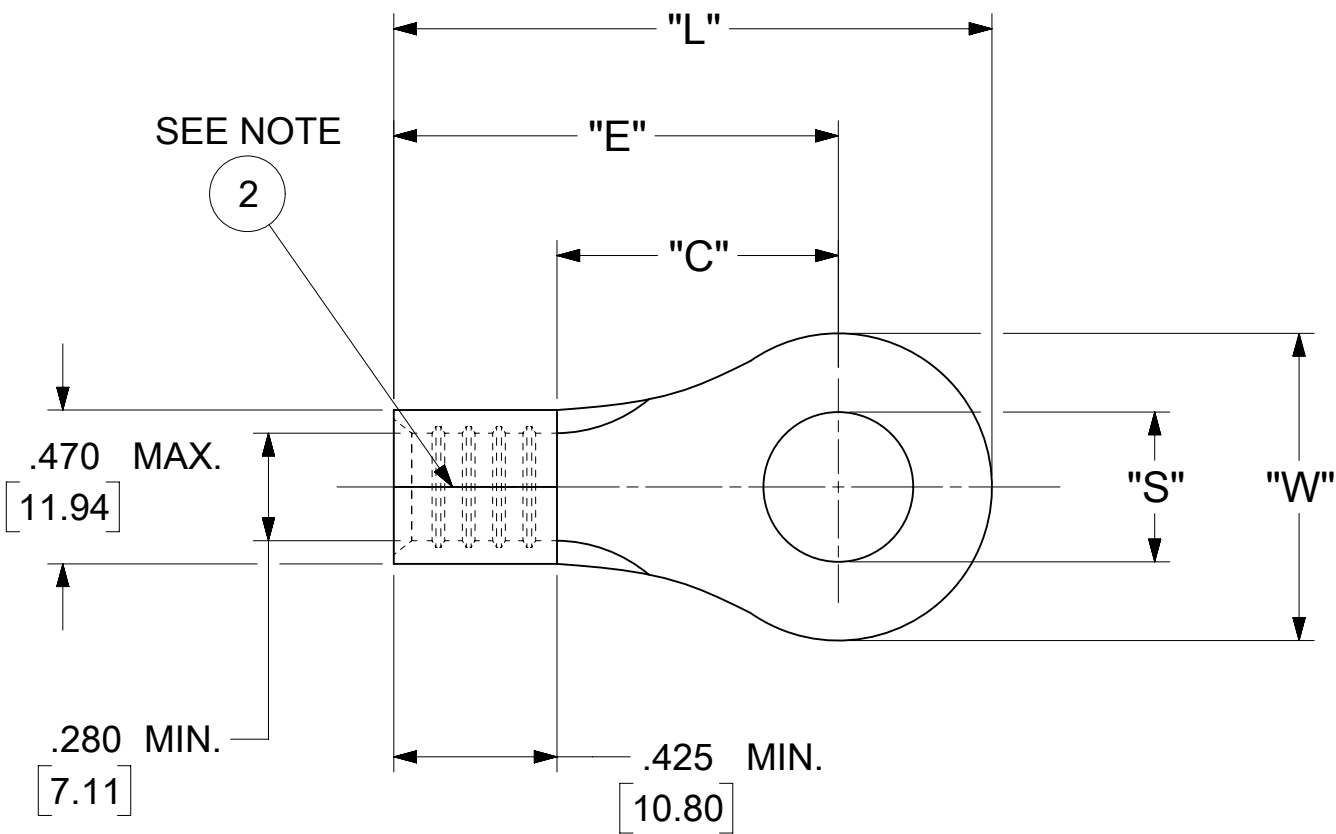

PARTS ON TAPE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS

INCH/MM

SCALE

NTS

GENERAL TOLERANCES  
(UNLESS SPECIFIED)

MM

INCH

4 PLACES

±

±

3 PLACES

±

± 0.005

2 PLACES

±

0.13

± 0.01

1 PLACE

±

0.25

±

0 PLACES

±

±

ANGULAR TOL

±

0.5 °

DRAFT WHERE APPLICABLE  
MUST REMAIN  
WITHIN DIMENSIONS

THIRD ANGLE PROJECTION

DRAWING

C-SIZE

SERIES

19193

CURRENT REV DESC: REMOVED OBSOLETE PART  
NUMBERS AS PER PCN#515181

EC NO: 793824

DRWN: MADHAM5

CHK'D: GGA

APPR: GGA

2024/05/22

2024/08/14

2024/08/14

INITIAL REVISION:

DRWN: LEM

APPR: JMACNEIL

1970/03/02

2019/08/06

DOCUMENT NUMBER

191930254

DOC TYPE

PSD

DOC PART

000

REVISION

A1

RING TONGUE TERMINAL  
VERSAKRIMP

PRODUCT CUSTOMER DRAWING

MATERIAL NUMBER

SEE TABLE

CUSTOMER

GENERAL MARKET

SHEET NUMBER

1 OF 1