Reed Relay V23100 -V6

- **Reed contact**
- **Small size**
- **Dust protected**
- **1 or 2 make contacts, neutral, monostable or**
- **1 make and 1 break contact, polarised, monostable**
- **Printed circuit mounting**



Contact Data	A101	A201	A112
Contact arrangement	1 make	2 makes	1 make 1 break
Maximum switching voltage		100	
Maximum switching current			
break	-	-	0.25 A
make	0.5 A	0.5 A	0.5 A
Maximum power rating		10 W	
Maximum continuous current			
break			
make	-	-	0.25 A
	0.75 A	0.75 A	0.75 A

Coil Data

Coil code	Rated voltage VDC	Minimum voltage U_I VDC	Maximum voltage U_{II} VDC	Resistance at 20°C Ω
004	5	3.7	10.8	430 ± 43
001	6	4.5	10.8	430 ± 43
002	12	8.4	21.6	1100 ± 110
003	24	16.4	42.5	3860 ± 580

The operating voltage limits U_I and U_{II} depend on temperature and can be calculated by:
UI tu = kI * UI 20°C and UII tu = kII * UII 20°C
tU = ambient temperatur
UItU = minimum voltage at ambient temperature tU
UII tU = maximum voltage at ambient temperature tU
kI and kII = factors

General	A101	A201	A112
Operating voltages		see „Coil table“	
Maximum temperature		100 °C	
Continuous thermal load at 20°C ambient temperature		max. 0,4 W	
Permissible ambient temperature		-25….+70°C	
Operate time		approx. 700 µs	
Release time		approx. 500 µs	
Bounce time		approx. 300 µs	
Maximum switching rate		500 operations/s	
Test voltage			
contact tip/contact tip	250 V AC_{rms}	250 V AC_{rms}	250 V AC_{rms}
contact/winding	1500 V AC_{rms}	1500 V AC_{rms}	750 V AC_{rms}
Electrical life			
at 28 V DC/125 mA		Approx. 10^6 operations	
Mechanical life		Approx. 10^9 operations	

t_U	20 °C	30 °C	40 °C	50 °C	60 °C	70 °C
k_I	1.0	1.04	1.07	1.1	1.15	1.18
k_{II}	1.0	0.93	0.86	0.79	0.71	0.62

05-2020, Rev. 0520
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

Reed Relay V23100 -V6 (Continued)

Dimensions

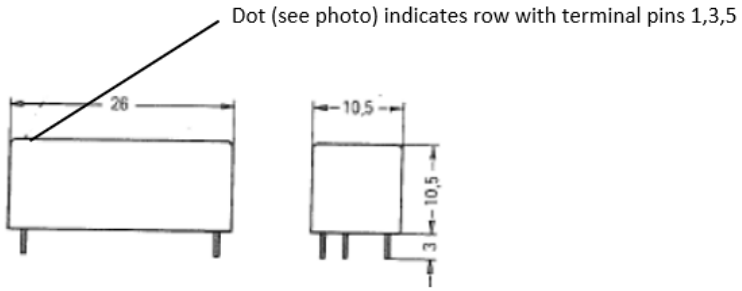

Terminal Assingment
Base terminals
Circuit symbols drawn in release condition. If a positive potencial is applied to coil terminal 1, the relay changes to operate condition

1 make



2 makes



1 make and break



PCB layout
Mounting hole layout
View onto the terminal

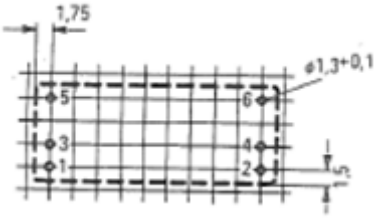

Minimum spacing for version with 1 make and 1 contact

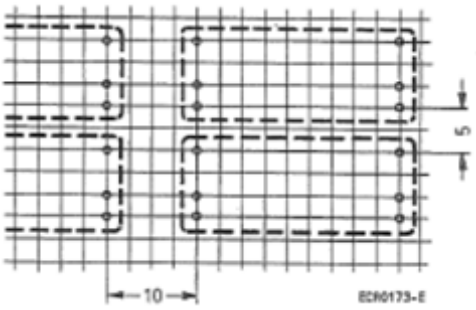

Typical product code	**V23100-V6**	**002**	**A101**

Type
V23100-V6 - Reed relay, V23100-V6 series

Coil
004 – 5 VDC
001 – 6 VDC
002 – 12 VDC
003 – 24 VDC

Contact arrangement
A101 – 1 make
A201 – 2 makes
A112 – 1 make and 1 break

05-2020, Rev. 0520
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.