STRADELLA-16-T1-A

Asymmetric IESNA Type I (short) beam designed for tilted poles. Suitable for Indian EESL specification.



SPECIFICATION:

Dimensions	49.5 x 49.5 mm
Height	4.3 mm
Fastening	pin, screw
ROHS compliant	yes

MATERIALS:

Component	Type	Material	Colour	Finish
STRADELLA-16-T1-A	Multi-lens	PMMA	clear	

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C16220_STRADELLA-16-T1-A » Box size: 480 x 280 x 300 mm	800	160	160	5.3

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

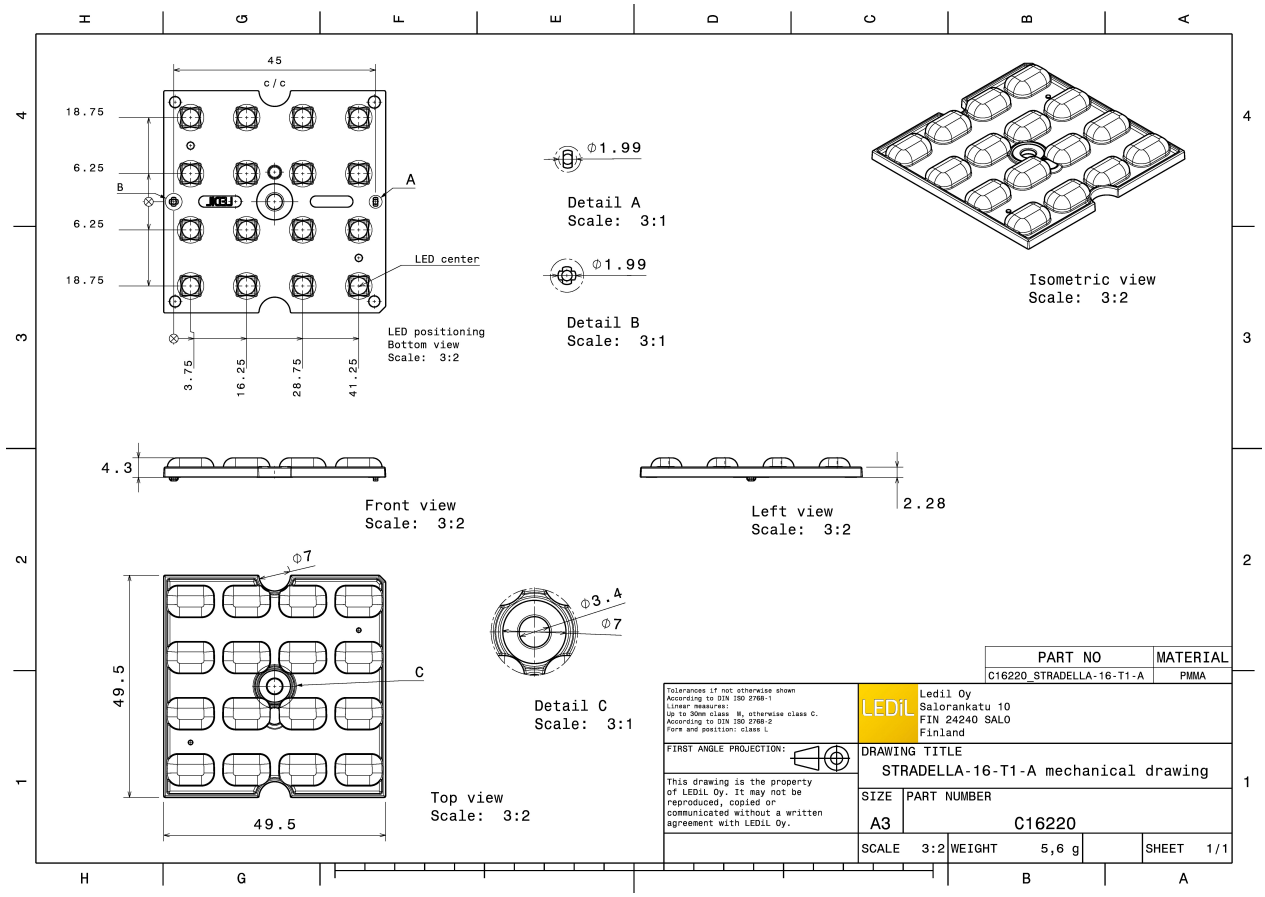

See also our general installation guide: www.ledil.com/installation_guide

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

CREE LEDs

LED	J Series 3030
FWHM / FWTM	Asymmetric
Efficiency	97 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

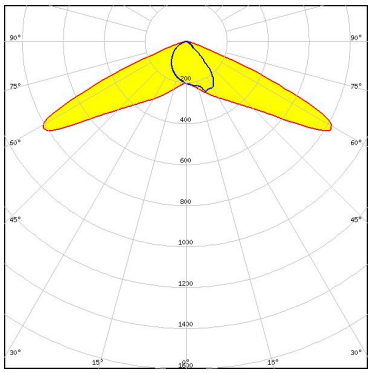

ELECTRIO

LED	EHP-223.5x50-1604-xx-70-LS30-06-NTC
FWHM / FWTM	Asymmetric
Efficiency	96 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

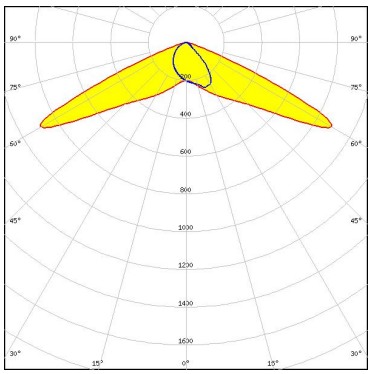

NICHIA

LED	NF2x757G
FWHM / FWTM	Asymmetric
Efficiency	97 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

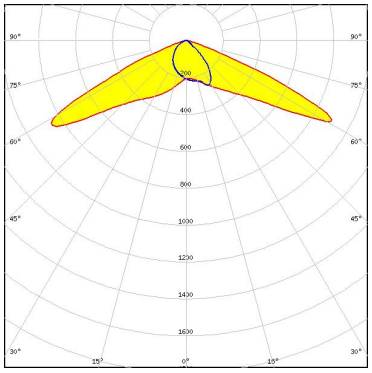

NICHIA

LED	NFSW757H
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

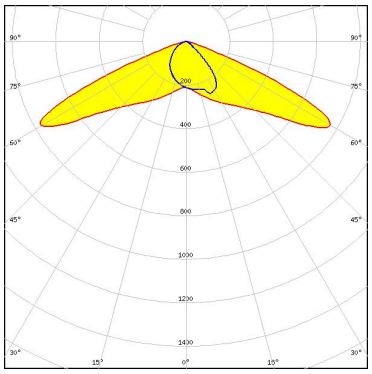

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

NICHIA

LED	NFSx757D
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.1 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

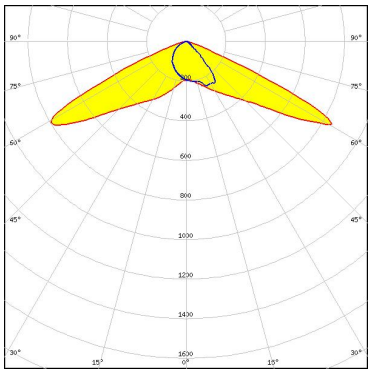

NICHIA

LED	NFSx757G
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

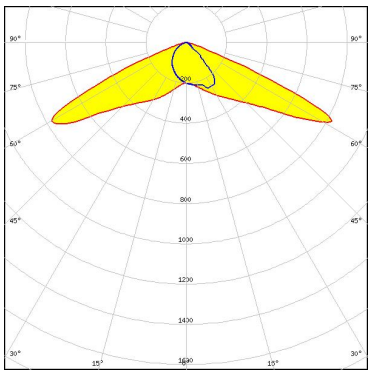

OSRAM

LED	PrevaLED Brick MP 4x16
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

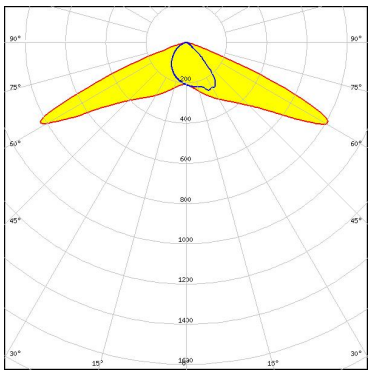

OSRAM
Opto Semiconductors

LED	Duris S5 (2 chip)
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour	Purple
Required components:	

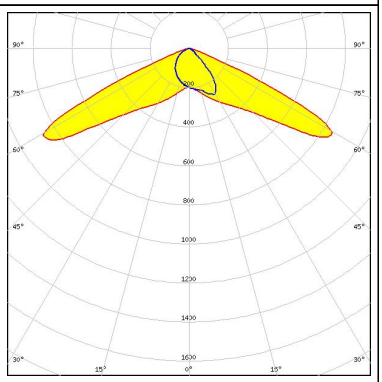

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

OSRAM
Opto Semiconductors

LED	Duris S5 (Single chip)
FWHM / FWTM	Asymmetric
Efficiency	93 %
Peak intensity	1.5 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

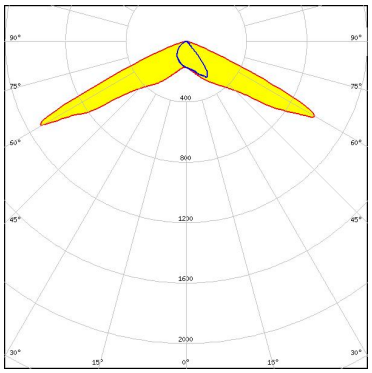

OSRAM
Opto Semiconductors

LED	OSCONIQ S 3030 (QSLR31)
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

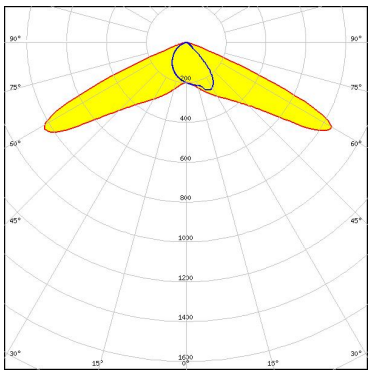

PHILIPS

LED	Fortimo FastFlex LED 4x16 DHE G4
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

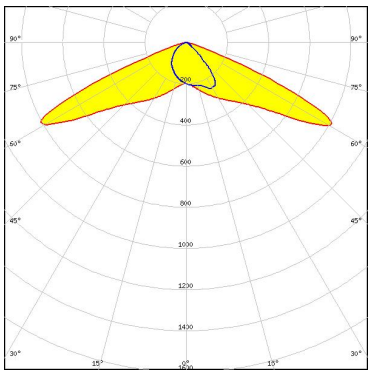

SAMSUNG

LED	HiLOM RM64 (LM301B)
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

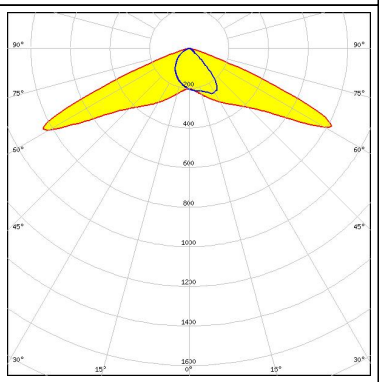

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

SAMSUNG

LED	LM231 A/B
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.2 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

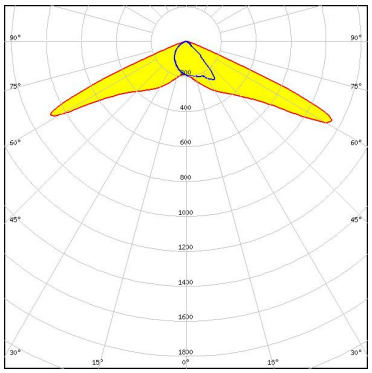

SCIOLUX

LED	XLE-S44XTEHE (XT-E HE)
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

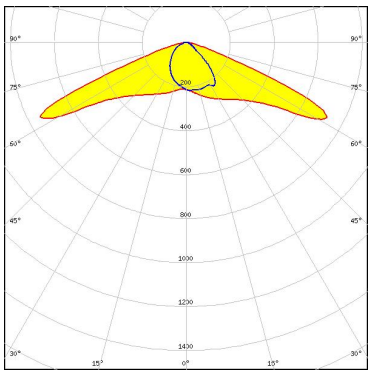

SEOUL SEMICONDUCTOR

LED	SEOUL 3030
FWHM / FWTM	Asymmetric
Efficiency	93 %
Peak intensity	1.2 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

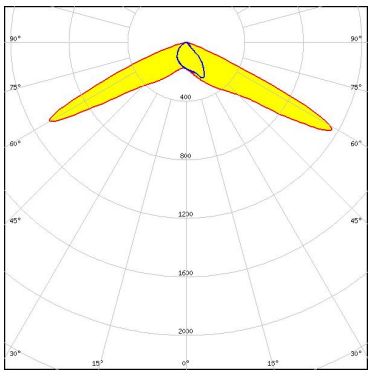

TRIDONIC

LED	RLE 4x16 4000lm MP ADV2 OTD
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

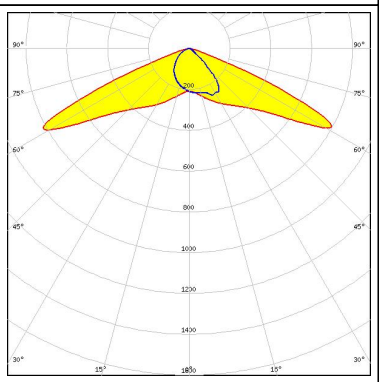

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

TRIDONIC

LED	RLE 4x16 4000lm MP ADV2 OTD
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

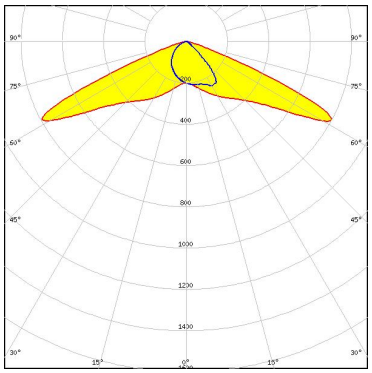

TRIDONIC

LED	RLE 4x8 2000lm MP ADV2 OTD
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

bridgelux

LED	CSP 2727 (BXCP)
FWHM / FWTM	Asymmetric
Efficiency	95 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

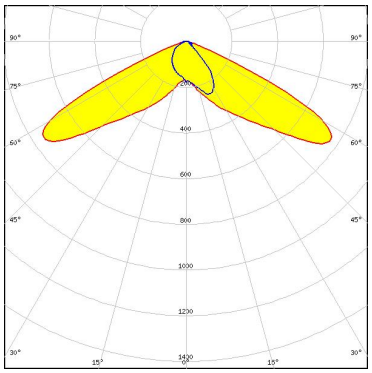

bridgelux

LED	CSP 2727 (BXCP)
FWHM / FWTM	Asymmetric
Efficiency	85 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

Protective plate, glass

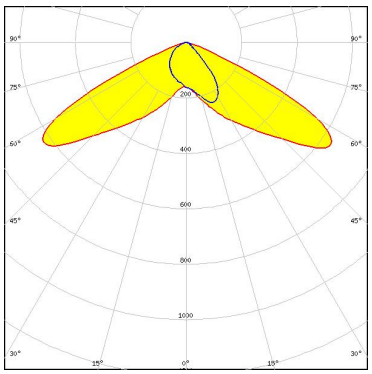

CREE LEDs

LED	J Series 2835
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

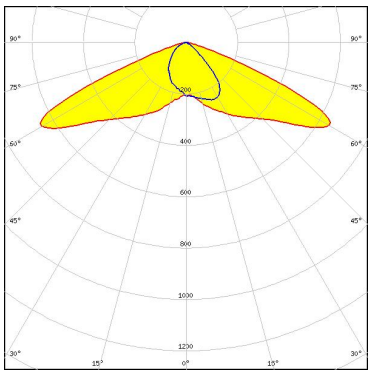

CREE LEDs

LED	XD16
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

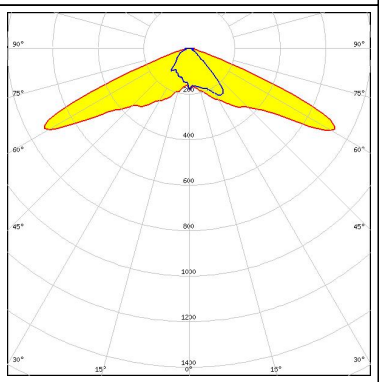

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

CREE LEDs

LED	XQ-E HD
FWHM / FWTM	Asymmetric
Efficiency	95 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

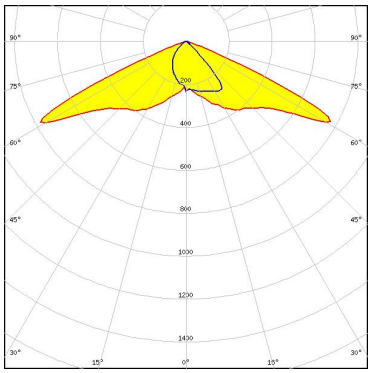

CREE LEDs

LED	XQ-E HI
FWHM / FWTM	Asymmetric
Efficiency	95 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

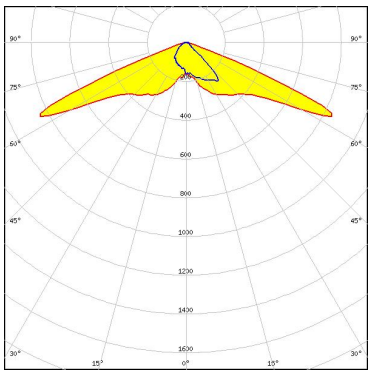

LUMILEDS

LED	LUXEON 2835 Line
FWHM / FWTM	Asymmetric
Efficiency	95 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

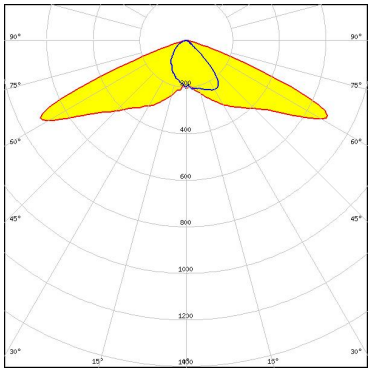

LUMILEDS

LED	LUXEON 3030 2D (Round LES)
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

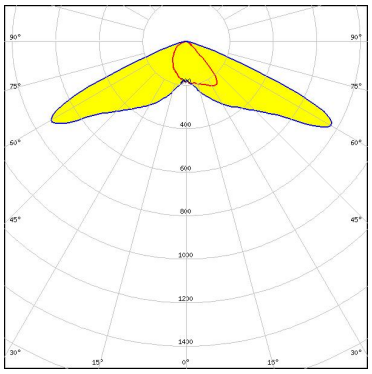

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

LUMILEDS

LED	LUXEON 3030 2D (Round LES)
FWHM / FWTM	Asymmetric
Efficiency	87 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

Protective plate, glass

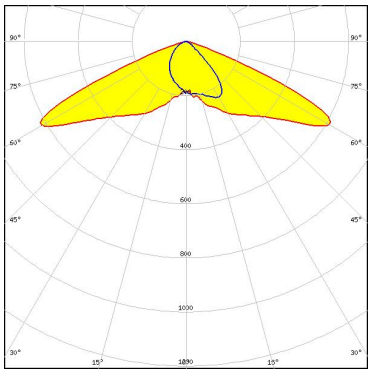

LUMILEDS

LED	LUXEON 3030 HE Plus
FWHM / FWTM	Asymmetric
Efficiency	95 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

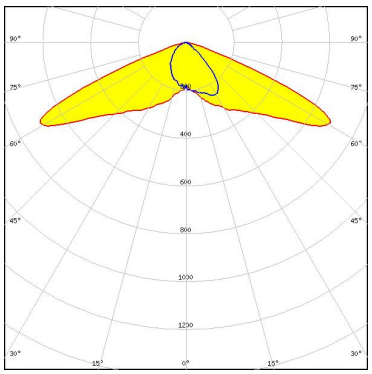

LUMILEDS

LED	LUXEON C
FWHM / FWTM	Asymmetric
Efficiency	92 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour	RGBW

Required components:

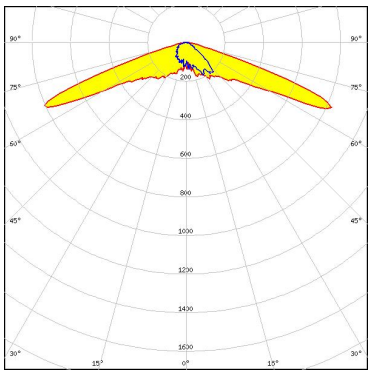

LUMILEDS

LED	LUXEON CZ
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.1 cd/lm
LEDs/each optic	1
Light colour	RGBW

Required components:

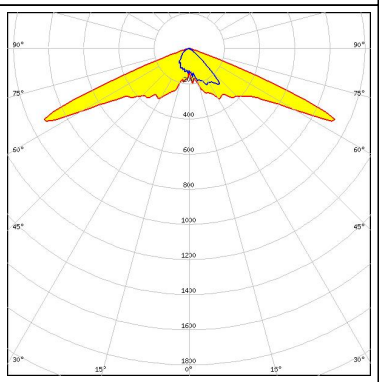

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

NICHIA

LED	NF2W757G-MT (Tunable White)
FWHM / FWTM	Asymmetric
Efficiency	95 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	Tunable White
Required components:	

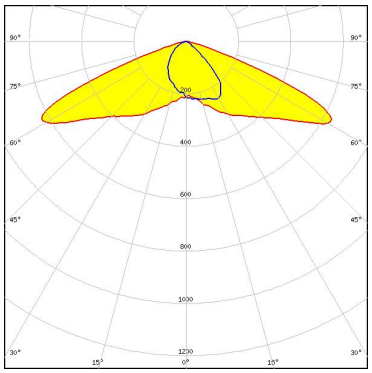

NICHIA

LED	NF2W757G-MT (Tunable White)
FWHM / FWTM	Asymmetric
Efficiency	87 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	Tunable White
Required components:	

Protective plate, glass

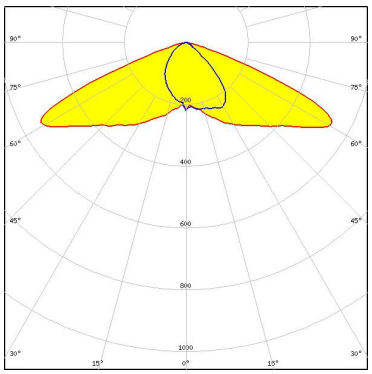

NICHIA

LED	NFSWE11A
FWHM / FWTM	Asymmetric
Efficiency	92 %
Peak intensity	1.2 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

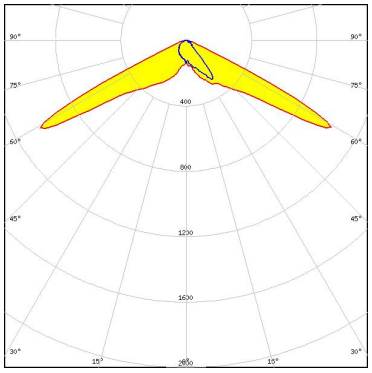

NICHIA

LED	NVSxE21A
FWHM / FWTM	Asymmetric
Efficiency	93 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

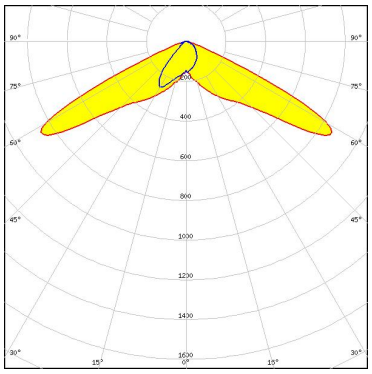

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors

LED	Duris S5 (2 chip)
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

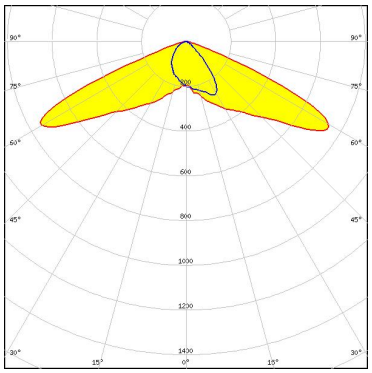

OSRAM
Opto Semiconductors

LED	OSCONIQ C 2424
FWHM / FWTM	Asymmetric
Efficiency	86 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

Protective plate, glass

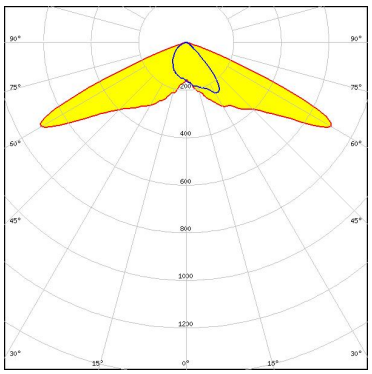

OSRAM
Opto Semiconductors

LED	OSCONIQ C 2424
FWHM / FWTM	Asymmetric
Efficiency	95 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

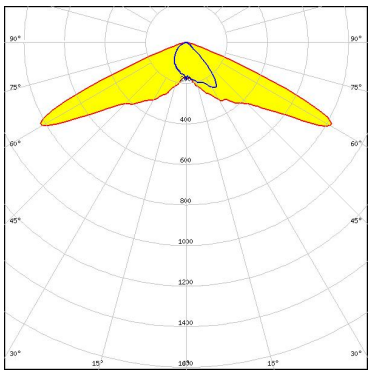

OSRAM
Opto Semiconductors

LED	OSCONIQ C 3030
FWHM / FWTM	134.0 + 73.0° / 146.0 + 123.0°
Efficiency	86 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

Protective plate, glass

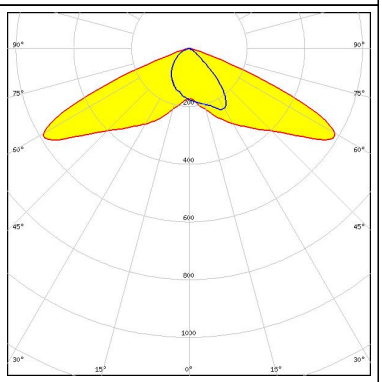

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors

LED	OSCONIQ C 3030
FWHM / FWTM	Asymmetric
Efficiency	96 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

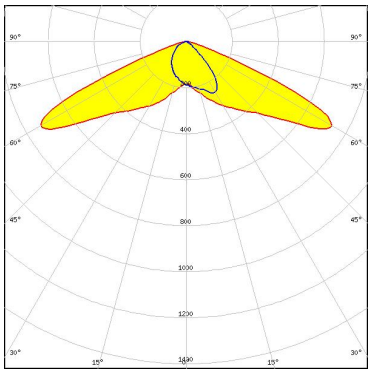

PHILIPS

LED	Fortimo FastFlex LED 4x16 DHE G4
FWHM / FWTM	Asymmetric
Efficiency	87 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

Protective plate, glass

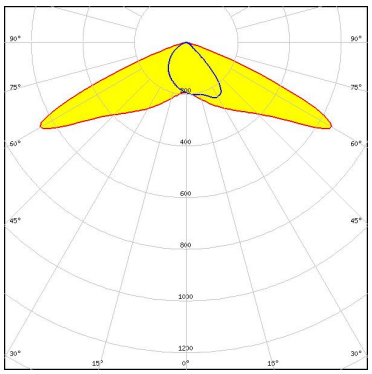

SAMSUNG

LED	LH181B
FWHM / FWTM	Asymmetric
Efficiency	88 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

Protective plate, glass

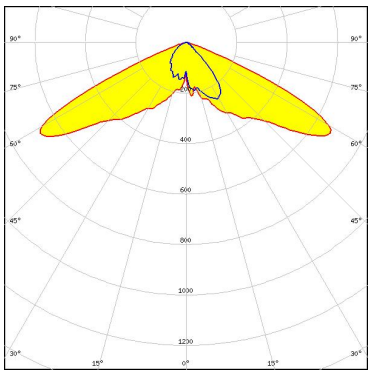

SAMSUNG

LED	LH181B
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

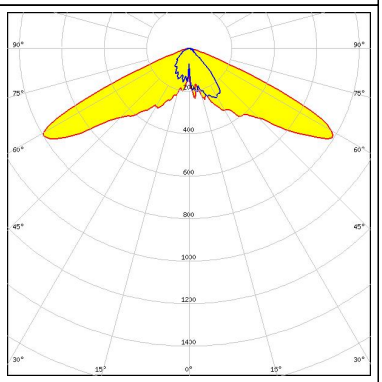

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED	LM101B
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.1 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

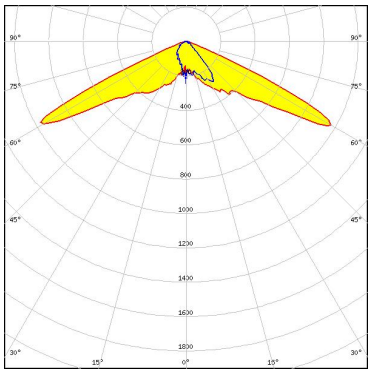

SAMSUNG

LED	LM28xB Series
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

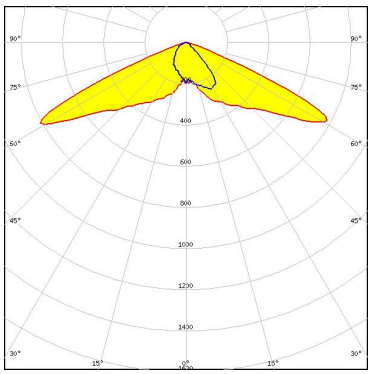

SAMSUNG

LED	LM301B
FWHM / FWTM	Asymmetric
Efficiency	95 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

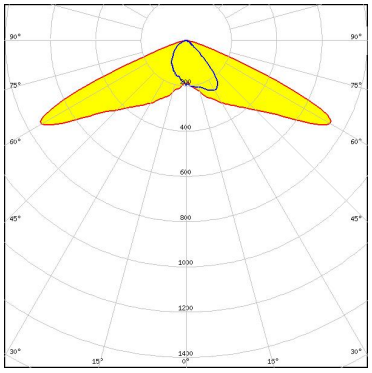

SAMSUNG

LED	LM301B
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

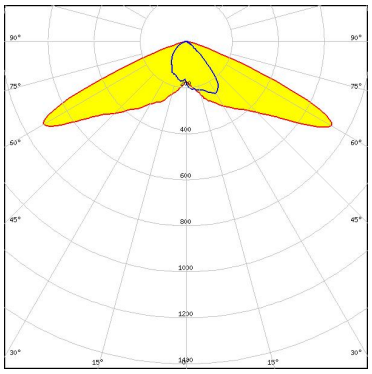

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED	LM301B
FWHM / FWTM	Asymmetric
Efficiency	87 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

Protective plate, glass

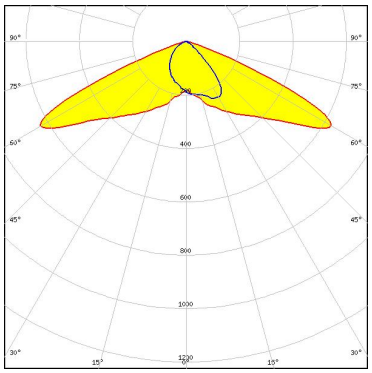

SEOUL SEMICONDUCTOR

LED	SEOUL DC 3030C
FWHM / FWTM	Asymmetric
Efficiency	95 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

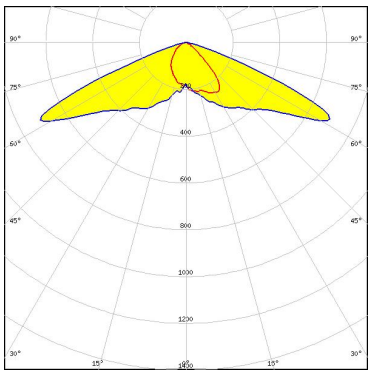

SEOUL SEMICONDUCTOR

LED	SEOUL DC 3030C
FWHM / FWTM	Asymmetric
Efficiency	87 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

Protective plate, glass

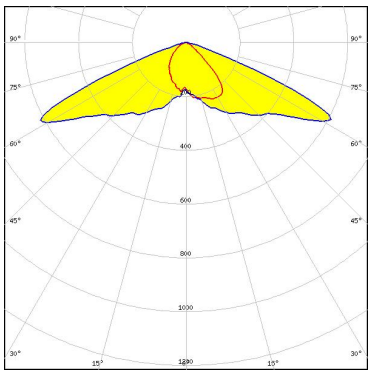

SEOUL SEMICONDUCTOR

LED	Z8Y19
FWHM / FWTM	Asymmetric
Efficiency	83 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

Protective plate, glass

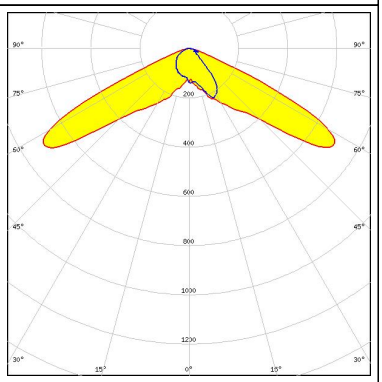

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

SEOUL SEMICONDUCTOR

LED	Z8Y22
FWHM / FWTM	Asymmetric
Efficiency	83 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

Protective plate, glass

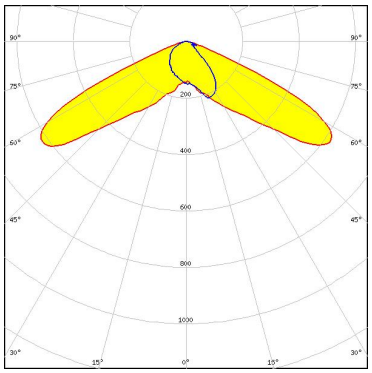

SEOUL SEMICONDUCTOR

LED	Z8Y22T
FWHM / FWTM	Asymmetric
Efficiency	87 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

Protective plate, glass

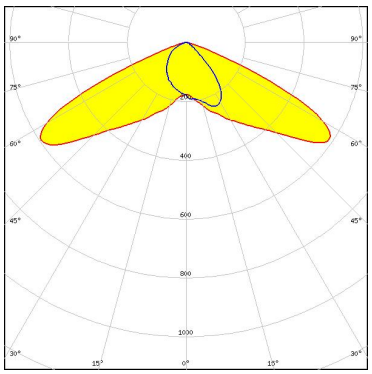

SEOUL SEMICONDUCTOR

LED	Z8Y22T
FWHM / FWTM	Asymmetric
Efficiency	95 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

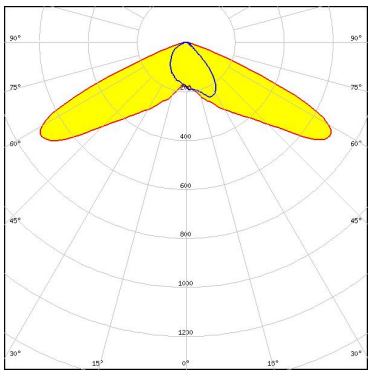

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy
Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.
228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.
405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support
www.ledil.com/
where_to_buy

Shipping locations
Salo, Finland
Hong Kong, China

Distribution Partners
www.ledil.com/
where_to_buy

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.