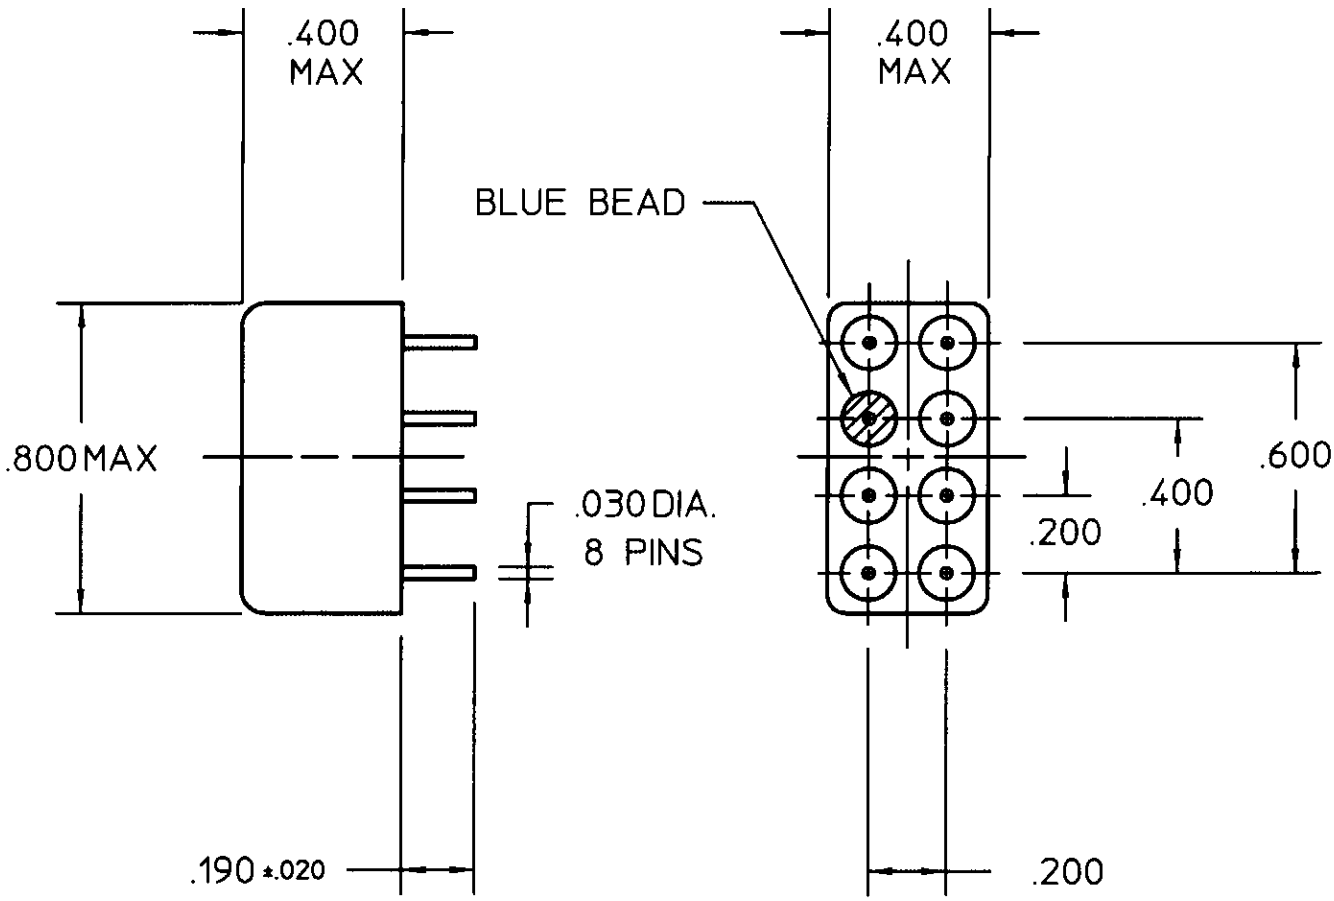


REV. 0

DCO 15703

COIL:

RESISTANCE 1030 OHMS ±10%

NOMINAL VOLTAGE 24.0 - 35.0 VDC

MUST OPERATE 16.0 VDC

MUST RELEASE 9.6 VDC MAX., 1.8 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX.
RELEASE 5 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

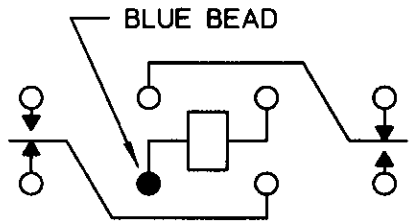

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. B.D. 6/11/99 | CK. GH 6-11-99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. GENICOM
CUST. NO. 3SAV5004K1

TYPE "HFW" RELAY

HFW1201S183