

C	DGA00RB**-RB01A


REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
N/C	NEW RELEASE PER E.O. A 4660	1-15-86	A.C.
A	REVISED PER E.O. A 5637	10-7-86	AC
B	REVISED PER E.O. A5724	10-28-86	
C	REVISED PER E.O. A10864	8-29-90	

FOLLOWER

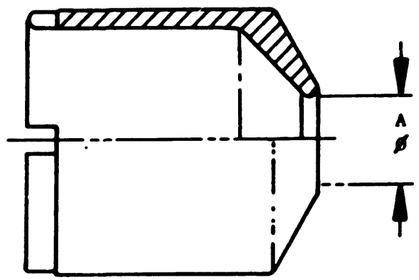

WASHERS
(SEE TABLE
FOR QUANTITY)



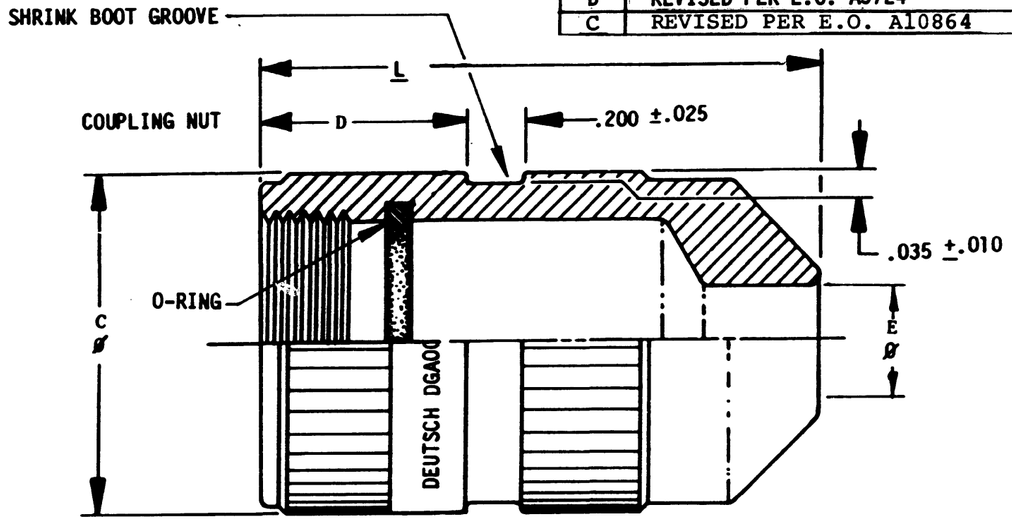

CONNECTOR TYPE	SHELL SIZE	CONNECTOR CODE (**)	A ±.010	B ±.010	NUMBER OF WASHERS	C MAX.	D ± .010	E ±.010	L ±.015
DEUTSCH DG123 & MIL-C-81511	8	08	.156	.203	3	.661	.400	.265	1.193
	10	10	.234	.265		.789		.296	
	14	14	.390	.437		1.044		.500	
	16	16	.453	.515		1.171		.562	
	18	18	.562	.640		1.282	.410	.671	
	20	20	.593	.640		1.410	.475	.703	
	22	22	.656	.912		1.537		.750	1.513
	24	24	.865	.912		1.668		.975	1.463
DEUTSCH DG123A	9	09	.156	.203	4	.661	.400	.265	1.193
	11	11	.234	.265		.789		.296	
	13	13	.387	.415		.916		.451	
	15	15	.390	.437		1.044		.500	
	17	17	.453	.515		1.171		.562	
	19	19	.562	.640		1.282	.410	.671	
	21	21	.593	.640		1.410	.475	.703	
	23	23	.656	.912		1.537		.750	1.513
	25	25	.865	.912		1.668		.975	1.463

NOTE:

4. CABLE DIAMETER DESIGN OR USAGE IS LIMITED BY DIAMETERS "A" (THROUGH WHICH THE WIRE BUNDLE MUST PASS), "B" (THROUGH WHICH THE GROSS SHIELD MUST PASS), AND "E" (THROUGH WHICH THE CABLE JACKET MUST PASS).
3. RECOMMENDED BACKSHELL TORQUE: 25 IN-LB.
2. MATERIAL: COUPLING NUT, FOLLOWER - METALIZED COMPOSITE
   WASHERS - DUCTILE METAL ALLOY.
   O'RING - FLOUROSILICONE.
1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

	SIGNATURE & DATE
DR	E. MacIlwain 8-25-86
CHK	A. Cuomo 8-25-86
PE	E. MacIlwain 8-25-86
APPD	R. Reed 8-25-86
SCALE NONE	WT ——

SHIELD TERMINATING
SHRINK BOOT ADAPTER

FOR DEUTSCH DG123 & DG123A
CONNECTORS

ENVELOPE

CP | MATL CODE

DEUTSCH
ENGINEERED CONNECTING DEVICES
Municipal Airport
Banning, California

B | DGA00RB**-RB01A

DWG SIZE | CODE 11139 | SHEET 1 OF 1