

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

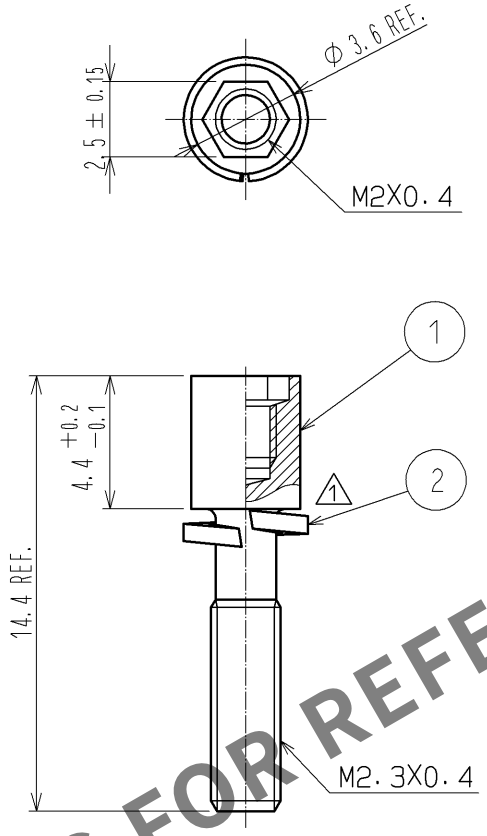

HRS DRAWING FOR REFERENCE

NOTE 1 THIS PRODUCT IS ASSEMBLED TO A "DH60-**P".
THE APPLICABLE PANEL THICKNESS IS FROM 1.4 TO 1.6mm.
2 2 THIS PRODUCT IS PACKED IN A BAG.(QUANTITY IN A BAG : 200pcs.)

1 ASSEMBLED(1:1)

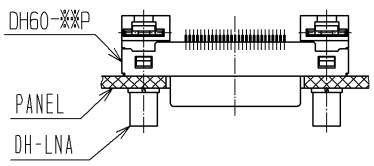

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
1	STEEL	OVER PLATING : NICKEL 5μm MIN UNDER PLATING : COPPER 1μm MIN	2	STEEL	OVER PLATING : NICKEL 5μm MIN UNDER PLATING : COPPER 1μm MIN

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	4 : 1	2	1	DIS-E-003059	MO. SHIMOYAMA	KN. ICHIKAWA	09.12.07

HIROSE ELECTRIC CO., LTD.

APPROVED	AO. SUZUKI	09.04.27
CHECKED	MO. SHIMOYAMA	09.04.24
DESIGNED	TS. ITO	09.04.24
DRAWN	TS. ITO	09.04.24

DRAWING NO.	EDC4-126895-00
PART NO.	DH-LNA
CODE NO.	CL244-0045-0-00

2 1/1