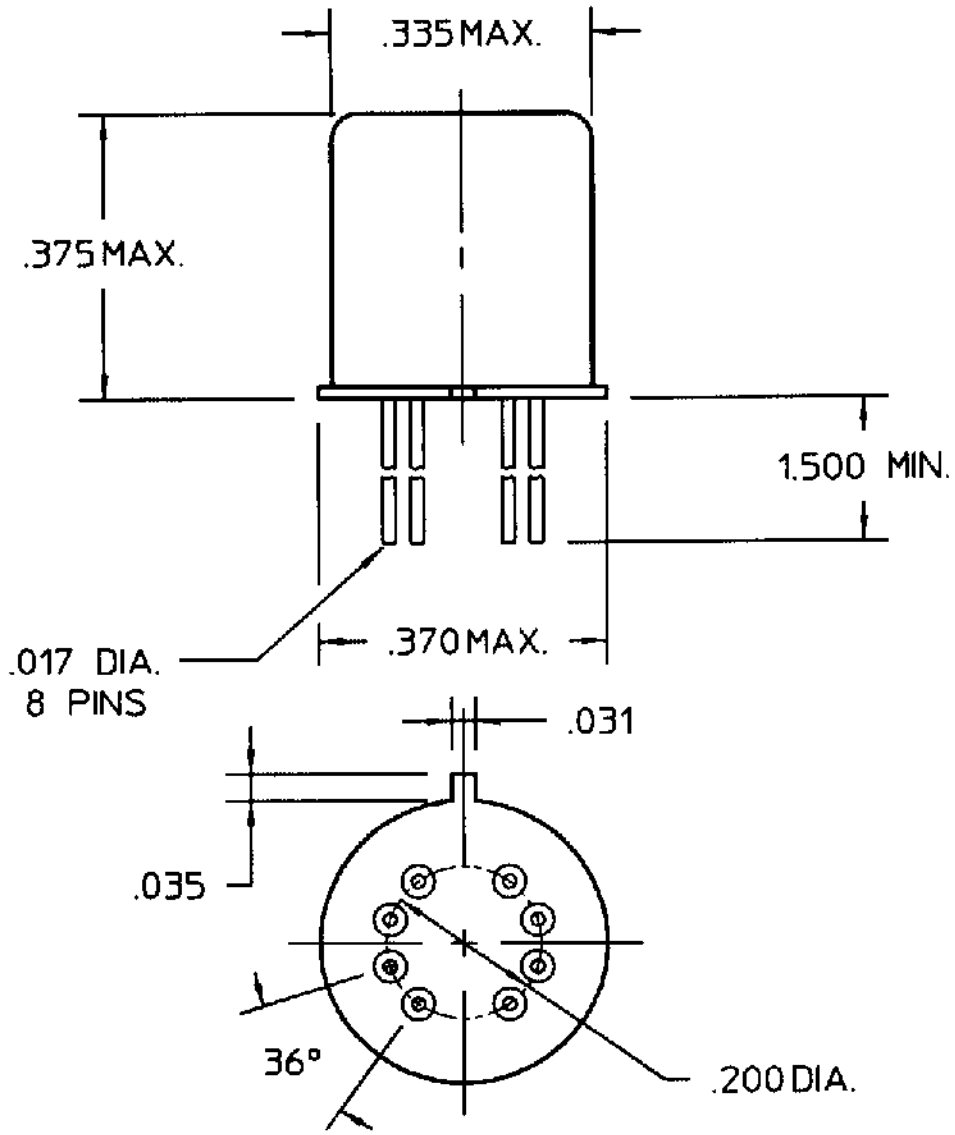


COIL: @ 25°C

RESISTANCE	850 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	7.0 VDC
MUST RELEASE	.64 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4 MS MAX
RELEASE TIME 2 MS MAX
CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4/5/95 CK 5/9/95

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C. I. I.
CUST. NO. STD.

TYPE "MS" RELAY

MSW-12