
Automotive Link Fuse, Micro Style


FMX-M

Mechanical Dimensions: Inches [mm]

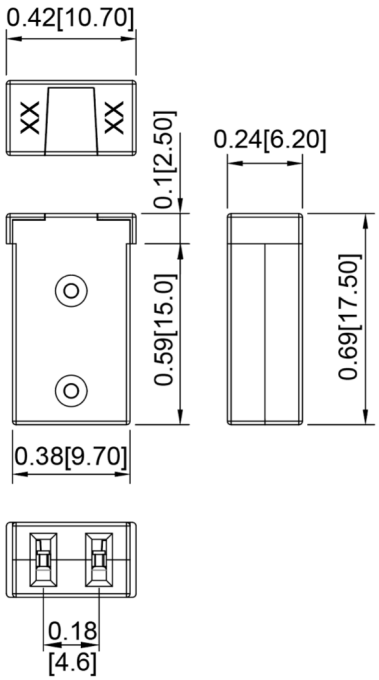

Retail Pack: Inches [mm]

Retail Pack #

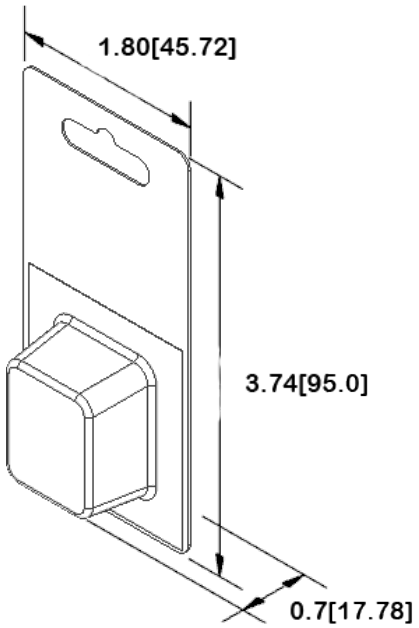

Part Numbers Information

Type	Amperage	Body Color	Bulk Part #	Retail Pack # Blister Card	Pack Size
Standard	15A	Gray	FMX-M-15A	FMX-M-15A-BP	1
	20A	Blue	FMX-M-20A	FMX-M-20A-BP	1
	25A	White	FMX-M-25A	FMX-M-25A-BP	1
	30A	Pink	FMX-M-30A	FMX-M-30A-BP	1
	40A	Green	FMX-M-40A	FMX-M-40A-BP	1
High Temp	15A	Gray	FMX-M-15A-HT	-	-
	20A	Blue	FMX-M-20A-HT	-	-
	25A	White	FMX-M-25A-HT	-	-
	30A	Pink	FMX-M-30A-HT	-	-
	40A	Green	FMX-M-40A-HT	-	-
SHUNT	30A	Black	FMX-M-30A-ST	-	-

*High Temp versions are marked with HT on the cover
*Shunt versions are marked with ST on the cover


Electrical Specifications

Voltage Rating	58VDC
Interrupting Rating	1000A @58VDC
Operation Temperature	-40˚C ~ +125˚C

Material Specifications

Body Material	PA66 (UL94V-0)
Cover Material	PC (UL94V-0)
Insertion Force	45N Max.
Extraction Force	45N Min. / 35N Max.

Mounting Hole

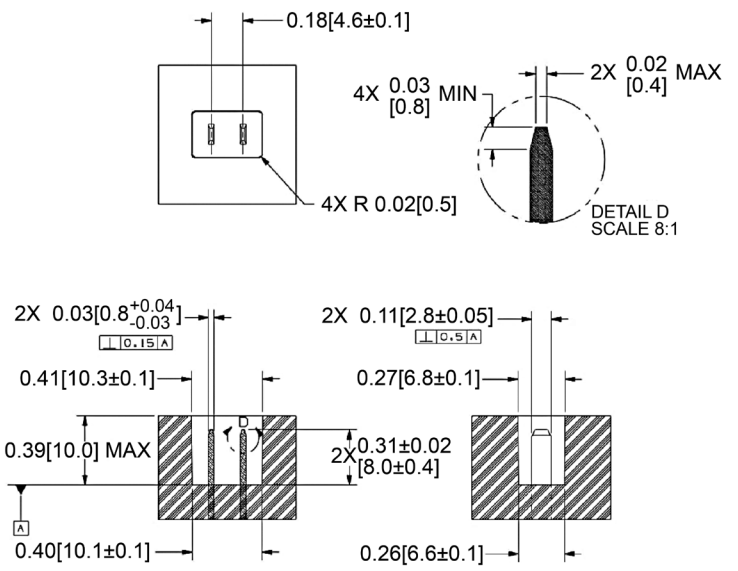

Time vs. Percent of Rated Current

% of Rated Current	Min Hold Time	Max Hold Time
110%	4hr	-
135%	60s	1800s
200%	2s	60s
350%	200ms	7s
600%	40ms	1s

* Data is based on standard type

Rev	Date of issue	Revision Notes	Designed	Approved
E	04-17-2025	Initial Drawing	RC	OF