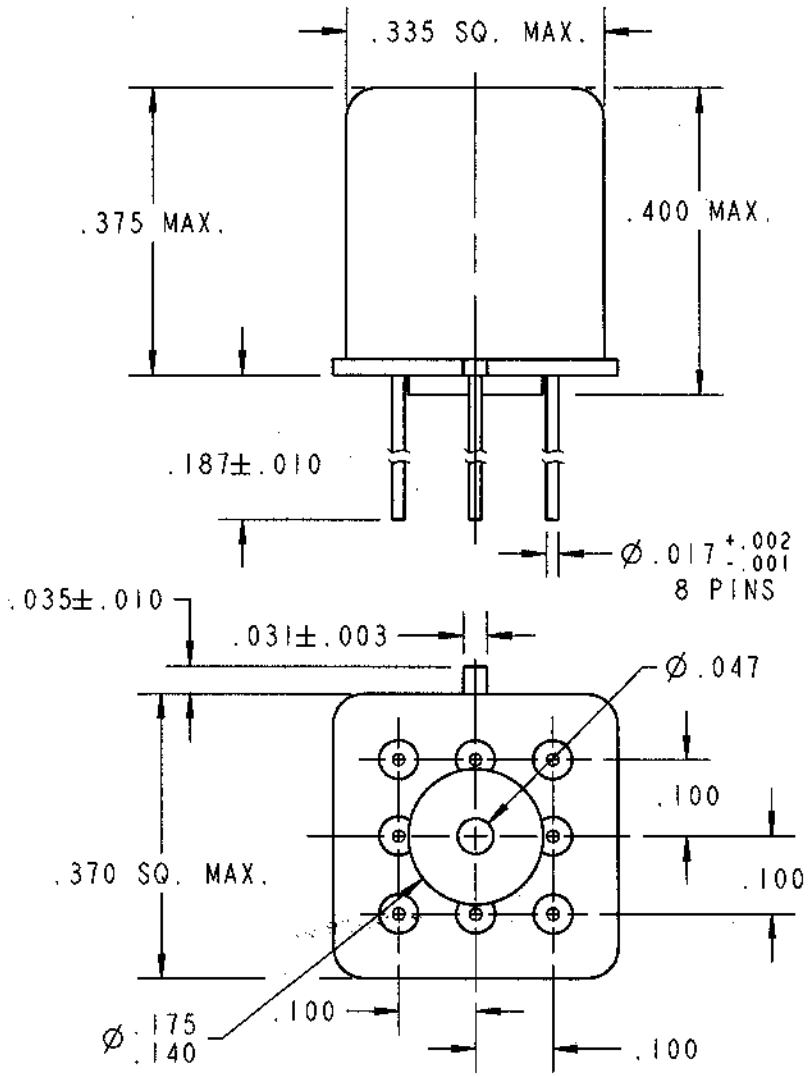


REV. 0
DCO 143609

COIL: @ 25°C

RESISTANCE	3200 Ω ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.0 VDC
MUST RELEASE	1.4 VDC

ENVIRONMENT:


VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX
RELEASE TIME 7.5 MS MAX
CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN

DR. ASB 10 JUL 02 | CK JERRY C 7/10/02

CII Technologies
advanced control electronic solutions

CUST. C.I.I. STD.
CUST. NO. _____ REV. _____

"MGSD" RELAY

MGSPD-26W

F-718 REV. 4