HDP24-24-21PE-L024 ✔ ACTIVE

DEUTSCH | DEUTSCH HDP, DEUTSCH HD

TE Internal #: YHDP24-24-21PEL024

12 V / 24 V / 48 V, 21 Position, Automotive Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Hybrid

View on TE.com >

Automotive Parts > Automotive Connectors > Automotive Housings > DEUTSCH HDP20 Housings







Nominal Voltage Architecture: **12 V, 24 V, 48 V**

Connector & Housing Type: **Housing for Male Terminals**

Number of Positions: **21**

Sealable: **Yes**

Operating Temperature Range: **-55 – 125 °C [-67 – 257 °F]**

All DEUTSCH HDP20 Housings (357)

Features

Product Type Features

Mixed & Hybrid Connector	Yes
Connector Shape	Circular
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Blank Cavity Position	0
Connector Modification	Wide Threaded Adapter
Connector Seal Code	E Seal
Number of Positions	21

Electrical Characteristics

Operating Voltage	250 VDC
Nominal Voltage Architecture	12 V, 24 V, 48 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black

Contact Features

Contact Size	Size 12, Size 16
Contact Type	Pin
Mating Pin Diameter	1.59 mm, 2.39 mm[.063 in][.094 in]
Contact Current Rating (Max)	13 A, 25 A

Mechanical Attachment

Strain Relief	Add By Accessory
Terminal Position Assurance	No
Mating Alignment Type	Guide Post
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PA GF

Dimensions

Compatible Insulation Diameter Range	1.35 – 3.05 mm, 2.46 – 4.01 mm[.053 – .12 in][.097 – .158 in]
Product Width	50.8 mm[2 in]
Product Length	41.53 mm[1.635 in]
Connector Height	47.63 mm[1.875 in]

Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operating Temperature (Max)	125 °C[257 °F]

Operation/Application

Circuit Application	Power

Industry Standards

IP Rating	IP67

UL Flammability Rating	20mm Flame Test per Standard UL-94

Packaging Features

Packaging Quantity	1
Packaging Method	Box

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # CAT-D48-SFT273
DEUTSCH Stamped and Formed Contacts



TE Part # 0411-336-1605
EXT TOOL, SIZE 16, 16-20 AWG, E, DRK BLU



TE Part # CAT-D48-SP729
DEUTSCH Sealing Plugs



TE Part # 0411-337-1205
EXT TOOL, SIZE 12, 12-14 AWG, E, ORG

TE Part # 62036-40
62036 HDP24 FLANGE-SEAL silicone 60shore



TE Part # DT-RT1
EXT TOOL, FRONT RELEASE



TE Part # Y2428-024-24050000
BKSHL, 24SZ, BLK, ST, L024, HDP



TE Part # YHDP26-24-21SEL024
PLG, 21P, BLK, E, WTHD, 12/16, S




TE Part # 24-D-PUNCH
D-HOLE PUNCH, SIZE 24



TE Part # 16-04477
GASKET, 24SZ, BLK, HD30



TE Part # HD30-24BT-BK
BOOT, 24SZ, ST, BLK

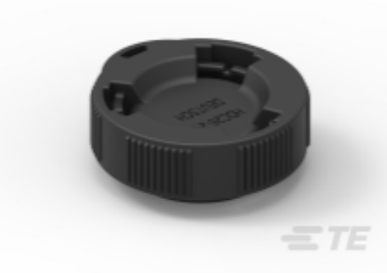


TE Part # CAT-H396-RC8382
Receptacle Protective Caps — DEUTSCH HDP20



TE Part # CAT-D48-ST273
DEUTSCH Solid Contacts



TE Part # HD30-24BT-90-BK
BOOT, 24SZ, RA, BLK



TE Part # HD30-24BT
BOOT, 24SZ, ST, GRY


Also in the Series | DEUTSCH HD



Automotive Housings(357)



Automotive Seals & Cavity Plugs(1)

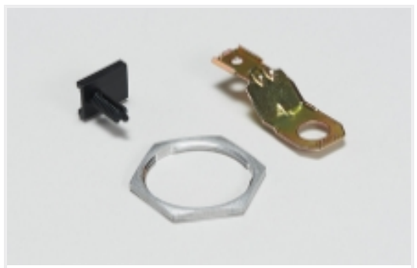

Other Automotive Connector Accessories(7)


Also in the Series | DEUTSCH HDP



Automotive Connector Caps & Covers (4)



Automotive Seals & Cavity Plugs(1)

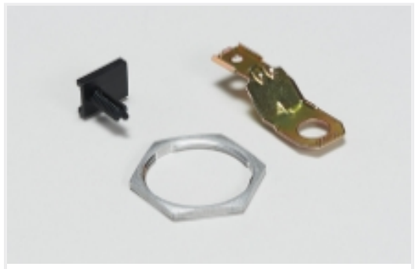

Other Automotive Connector Accessories(7)

Customers Also Bought



TE Part #CAT-H396-CH8172
DEUTSCH HDP20 Housings



TE Part #647845-4
SERIES 50 HOUSING,GRAY



TE Part #CAT-AM7801-CH8172
AMPSEAL 16 Housings



TE Part #2325106-1
ADAPTER,2POS,1.2X0.6,PIN HSG ASSY



TE Part #C34252-000
ES1000-NO.3-B8-X-55MM

Documents

Product Drawings

REC, 21P, BLK, E, WTHD, 12/16, P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_YHDP24-24-21PEL024_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_YHDP24-24-21PEL024_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_YHDP24-24-21PEL024_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English