
REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN15C0467~470	2015/12/18	Vicky	Update Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

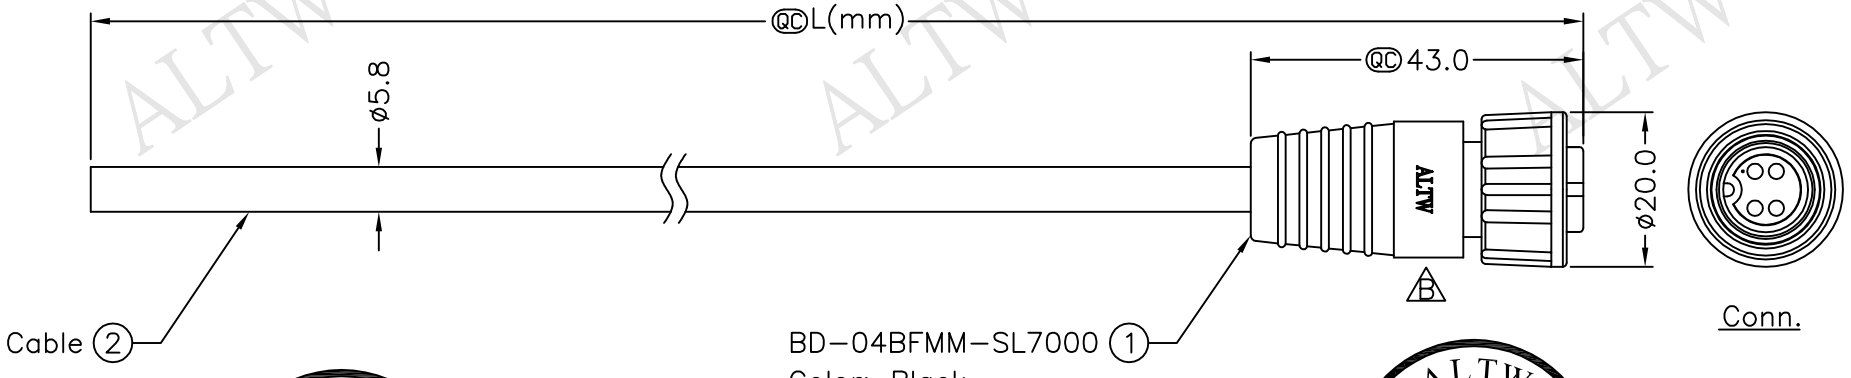

ALTW CONFIDENTIAL
2015.12.18
R&D DEPT.


ALTW DCC. DEPT. CONFIDENTIAL
2015.12.28
ISSUED

BD-04BFMM-SL7AXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters

Note:
* QC Important Dimension To Check.
* Waterproof Rate: IP67
* Housing: Nylon+GF, Black
* Male Pin: Copper Alloy, Gold Plated
* Cable: UL2464 24AWG*4C+D+Al/My, PVC Jacket, UV Resistant, OD=5.8mm, Black
B * Cable Length Tolerance:01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



Pin Assignments
Front View

Pin Out		
Conn.	Wire Color	
1	White	白
2	Green	綠
3	Red	紅
4	Yellow	黃

UNIT:mm	TITLE: Standard Cable Screw 4Pin F Conn M Pin	ITEM NO	DRAWN BY: Vicky / DATE: 2015/12/18
TOLERANCE: ±0.5 mm	SCALE: Free / SHEET: 1 OF 1	DWG NO: BD-04BFMM-SL7AXX	CHECKED BY: Rita / DATE: 2015/12/18
	REV: B / SIZE: A4 / QC :Inspection Item	CUSTOMER: ALTW	APPROVED BY: Lion / DATE: 2015/12/18

Amphenol LTW
安費諾亮泰企業股份有限公司

FMWI0702-01-01A2