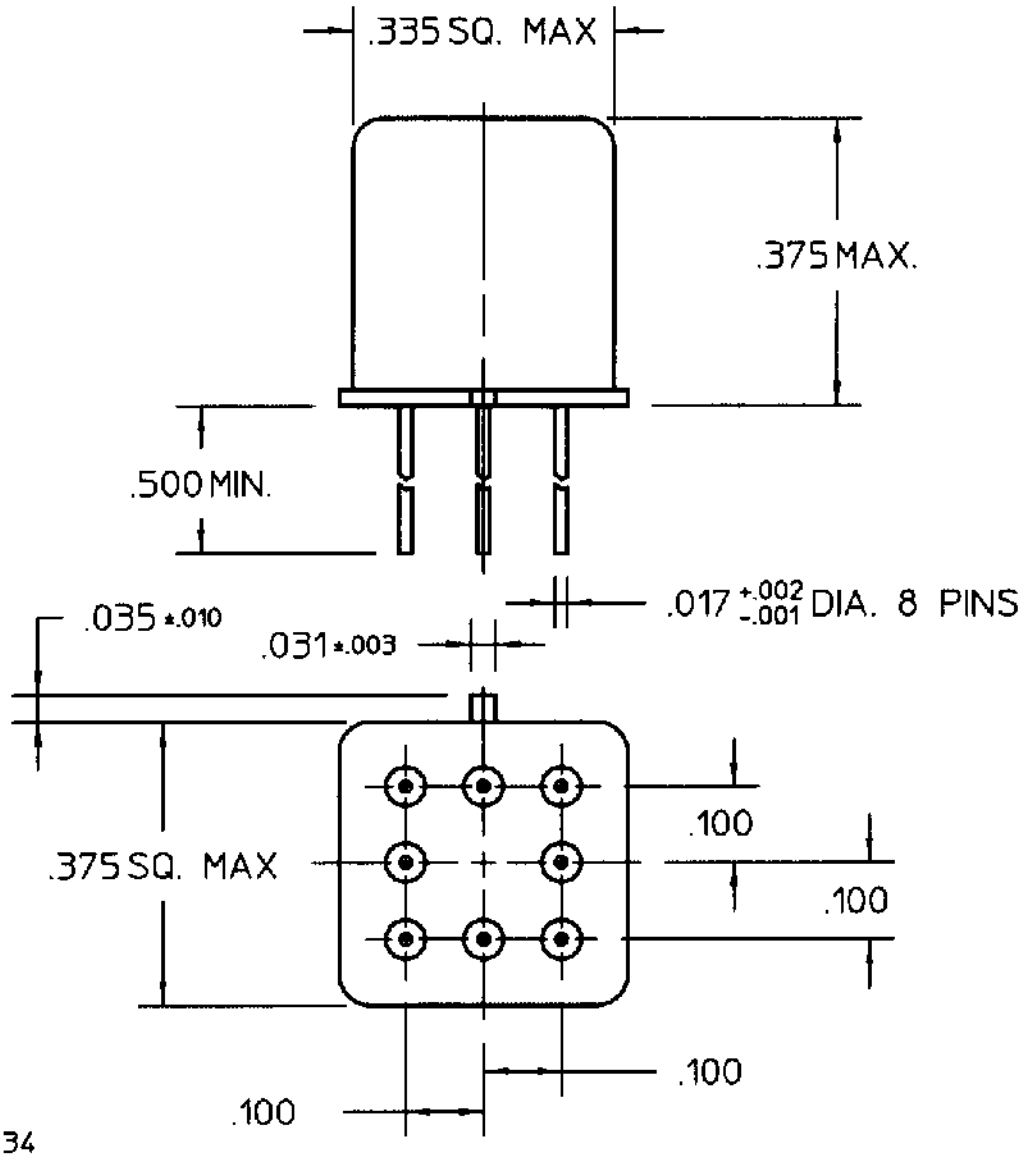


REV. 0

DCO 141034

COIL:

RESISTANCE	11,000 OHMS ± 10%
NOMINAL VOLTAGE	48.0 VDC
MUST OPERATE	25.8 VDC
MUST RELEASE	13.0 VDC MAX, 2.4 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's


SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX
RELEASE TIME 7.5 MS MAX
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

TERMINAL VIEW



CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN

DR. B.D. 4/28/99 | CK. [illegible] 4/28/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/42-038P

TYPE JMGSD RELAY

JMGSCD-48P