



© 2025 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	ECR-22-152753	20SEP2022	WQR	CW
	C2	ECR-24-202368	12MAR2024	RW	CW
	D	ECR-24-228547	05DEC2024	QH	BR
	E	ECR-25-246912	30JUN2025	ABS	RB

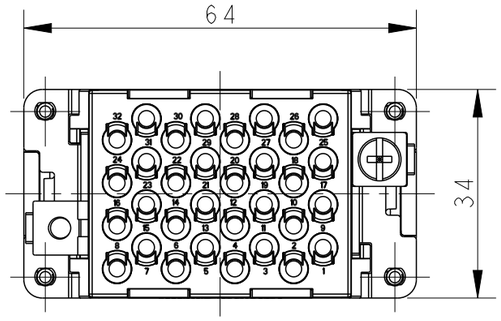

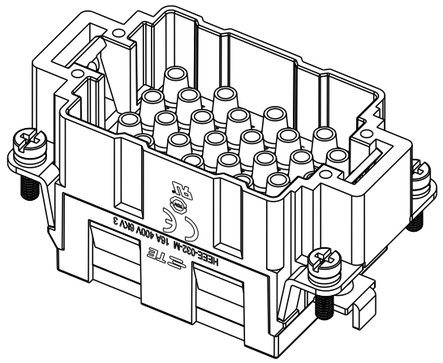


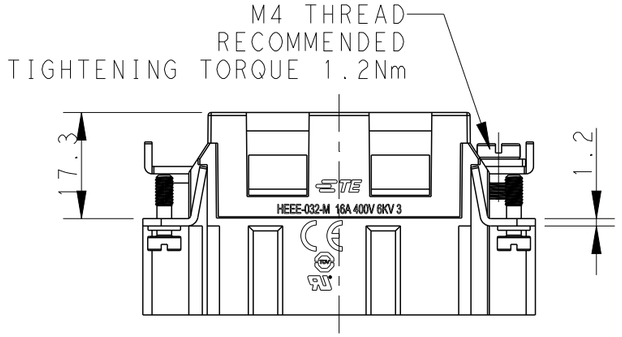




NOTES:
1. TECHNICAL CHARACTERISTICS:
   INSULATION MATERIAL: PC
   RATED VOLTAGE: 400V
   RATED CURRENT: 16A
   INSULATION RESISTANCE: >=400MΩ
   RATED IMPULSE VOLTAGE: 6KV
   POLLUTION DEGREE: 3
   FLAMMABILITY: UL94V-0
   MATING CYCLES: 500 CYCLES
   OPERATION TEMPERATURE: -40°C~+125°C
   WIRE RANGE: 0.14mm²~4mm² (AWG26-AWG12)
   CONTACT TYPE: CRIMP CONTACT
2. CONTACTS NEED TO BE ORDERED SEPARATELY.
   (ORDER No. REFER TO DRAWING:T20300X10XX000)

注释：
1. 技术参数：
   绝缘材料： PC
   额定电压： 400V
   额定电流： 16A
   绝缘电阻： >=400MΩ
   脉冲电压： 6KV
   污染等级： 3
   阻燃等级： UL94V-0
   插拔次数： 500次
   工作温度： -40°C~+125°C
   接线范围： 0.14mm²~4mm² (AWG26-AWG12)
   接线类型： 冷压接
2. 端子需要单独订购.
   (订货号参考图面： T20300X10XX000)

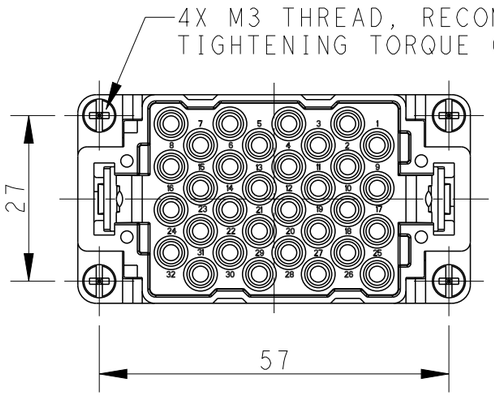

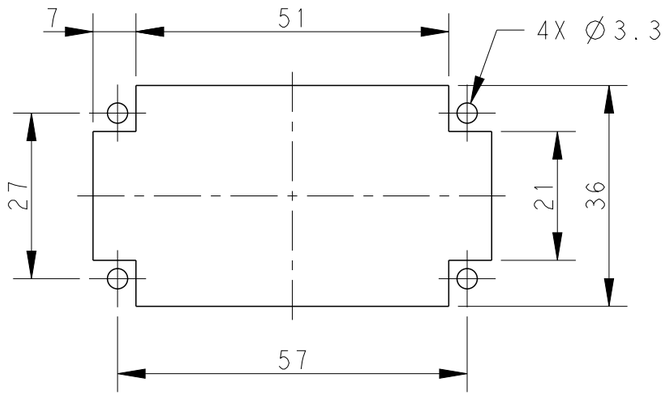

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS

TYPE 1,T2050323101-000
类型 1,T2050323101-000

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL - -

FINISH - -

DWN RAGHAVENDRA H M 18DEC2014
CHK CHRIS WANG 18DEC2014
APVD XU XIANG 18DEC2014
PRODUCT SPEC 108-137068
APPLICATION SPEC 114-137068
WEIGHT -

TE Connectivity

NAME HEEE-032-M


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2050323101000	-


CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 3 | REV E

1470-19 (3/13)


© 2025 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

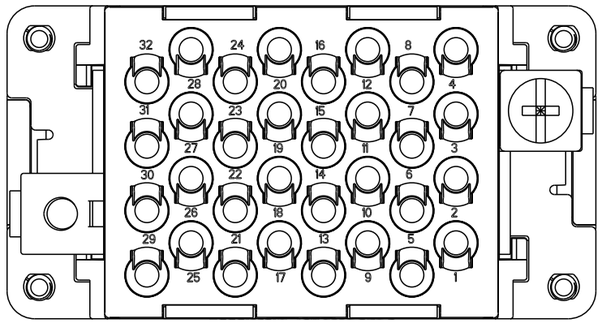

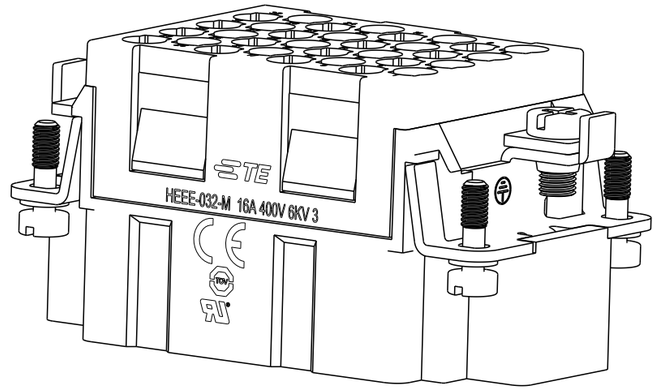


SCALE 3:2

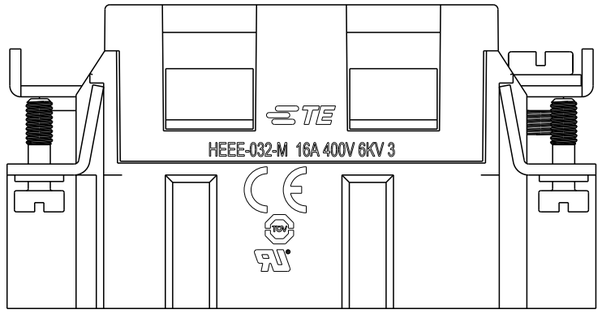



SCALE 3:2

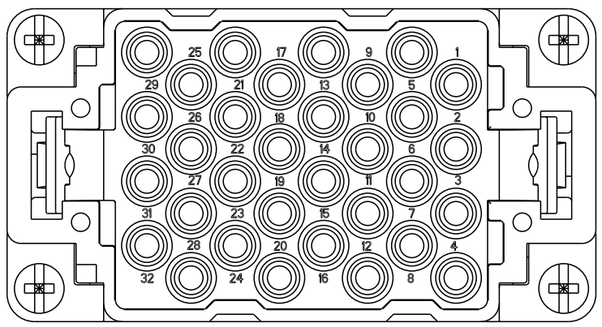

TYPE 2, T2050323101-001
类型 2, T2050323101-001

NOTES:
LASER PRINT MARKINGS SEE THIS SHEET,
OTHER SPEC REFER TO TYPE 1.

注释：
激光打标参照此页，其余产品规范参照类型 1.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-
MATERIAL - -	FINISH - -

DWN	18DEC2014 RAGHAVENDRA H M
CHK	18DEC2014 CHRIS WANG
APVD	18DEC2014 XU XIANG
PRODUCT SPEC	108-137068
APPLICATION SPEC	114-137068
WEIGHT	-
CUSTOMER DRAWING	

TE Connectivity


NAME HEEE-032-M


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2050323101000	-

SCALE	SHEET	REV
1:1	2 OF 3	E


© 2025 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

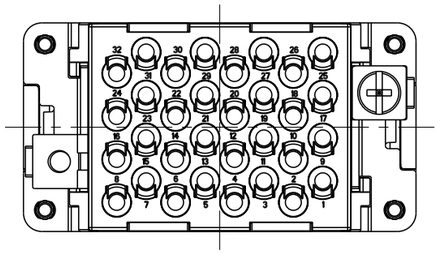

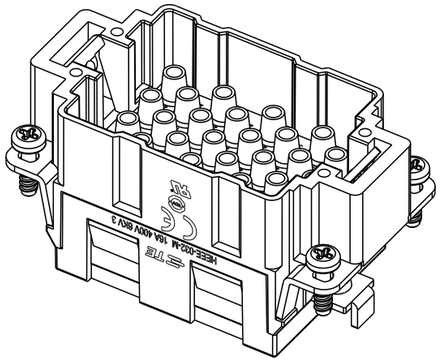






NOTES:
4X M3 SELF-TAPPING SCREW SEE THIS SHEET,
OTHER SPEC REFER TO TYPE 1.

注释:
4X M3 自攻螺丝参照此页,其余产品规范参照类型 1.

4X M3 SELF-TAPPING SCREW, RECOMMENDED
TIGHTENING TORQUE 1.2~1.5N.m
4X M3 自攻螺丝,推荐拧紧力矩 1.2~1.5N.m

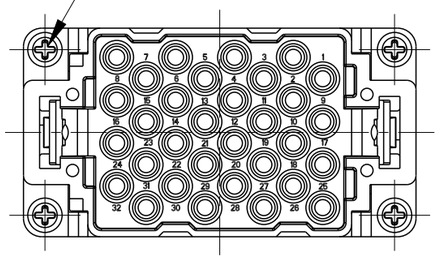

TYPE 3,T2050323101-002
类型 3,T2050323101-002

PART NUMBER 料号	PART DESCRIPTION 描述		TYPE 类型
T2050323101-002	HEEE-032-M	HEEE-032 MALE INSERT,SELF-TAPPING HEEE-032公插,自攻螺丝	TYPE-3 类型-3
T2050323101-001	HEEE-032-M	HEEE-032 MALE INSERT WITH STAINLESS STEEL SCREW HEEE-032公插,带不锈钢螺丝	TYPE-2 类型-2
T2050323101-000	HEEE-032-M	HEEE-032 MALE INSERT HEEE-032公插	TYPE-1 类型-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL -
-

FINISH -
-

DWN RAGHAVENDRA H M 18DEC2014
CHK CHRIS WANG 18DEC2014
APVD XU XIANG 18DEC2014
PRODUCT SPEC 108-137068
APPLICATION SPEC 114-137068
WEIGHT -

TE Connectivity

NAME HEEE-032-M

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2050323101000	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 3 OF 3 | REV E