


5		6		7		8	
REV.	ECN NO.	DATE	SIGN	DESCRIPTION			
B	LEN-770205	2007/07/11	J. Espiritu	Reverse Projection Of Polarization Key And Apply New Format			
C	LEN15C0487~490	2015/12/21	Vicky	Update Logo & Note			

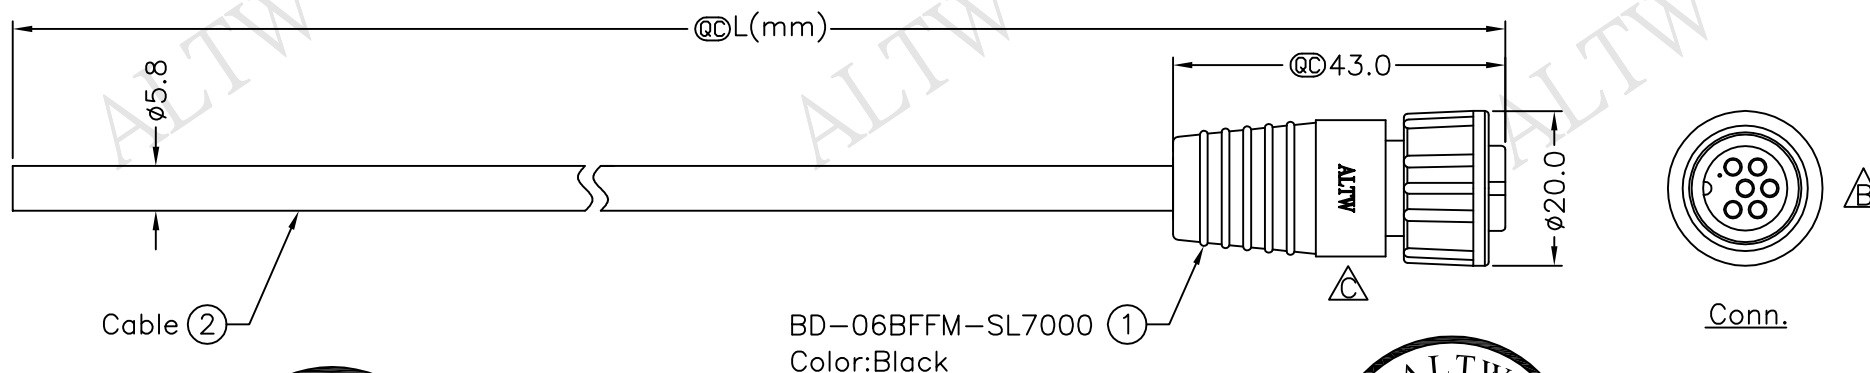


BD-06BFMM-SL7AXX

XX:01~99Meter
01:01Meter
02:02Meters

99:99Meters

Cable Length(L):01~99Meters



Pin Assignments

Front View

6	White	白
5	Red	紅
4	Orange	橘
3	Yellow	黃
2	Green	綠
1	Blue	藍
Conn.	Wire Color	
Pin Out		

Note:

- * @QC Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Cable: UL2464 24AWG*6C+D+Al/My,
PVC Jacket, UV Resistant, OD=5.8mm, Black
- * Cable Length Tolerance:
01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TITLE		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO		DRAWN BY		DATE	
TOLERANCE ±0.5 mm		Standard Cable Screw 6Pin F Conn F Pin			DWG NO BD-06BFFM-SL7AXX		CHECKED BY		DATE	
		SCALE Free			SHEET 1 OF 1		Rita		2015/12/21	
		REV. C			SIZE A4		QC :Inspection Item		APPROVED BY	
					CUSTOMER ALTW		Lisa		2015/12/21	

Amphenol LTW

安費諾亮泰企業股份有限公司