Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

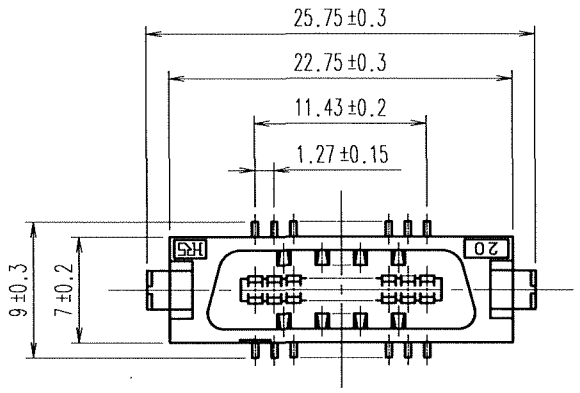

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

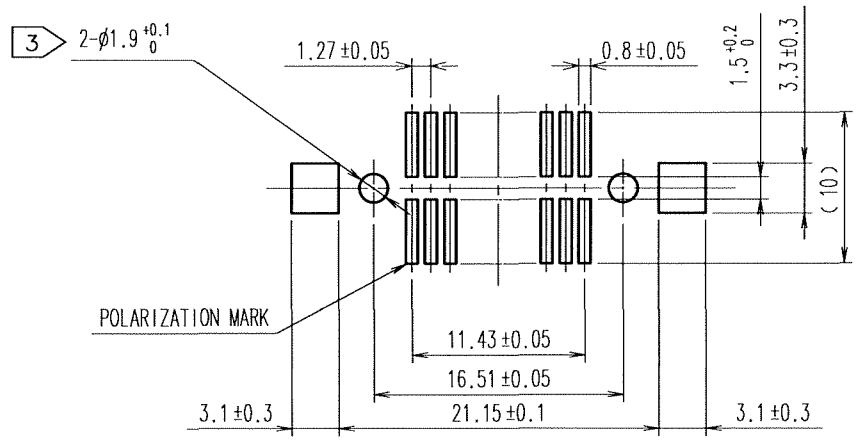

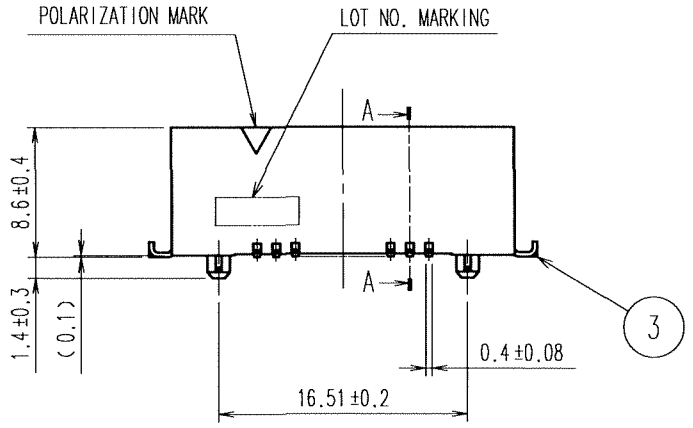

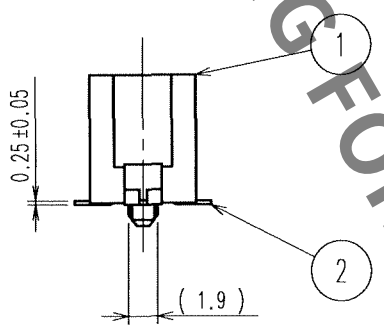

A–A



3 FIG.1 (5 : 1)



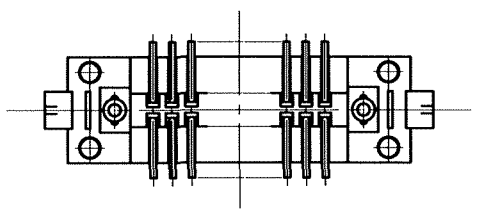

NOTES
1. LEAD CO-PLANARITY SHALL BE 0.15 MAX.
2. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3. IN CASE OF THE AUTOMATED MOUNTING, RECOMMENDED HOLE DIAMETER OF BOSS IS SHOWN IN FIG.1.

HRS DRAWING FOR REFERENCE

NO.	MATERIAL	FINISH, REMARKS
3	BRASS	TIN-PLATING
1	PPS	LIGHT BROWN (UL94V-0)

NO.	MATERIAL	FINISH, REMARKS
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μm min.
		LEAD AREA:TIN-PLATING 2μm min.
		UNDER PLATING:NICKEL 2μm min.

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	A.SUZUKAWA 06.02.08	H.Nakamura '06.02.13	K.Ogawa '06.02.13	H.Okawa '06.02.13	. .

SCALE	DRAWING NO.	PART NO.
2 : 1	EDC3-082752-21	FX2-20P-1.27SVL(71)
UNITS: mm	HRS HIROSE ELECTRIC CO., LTD	CODE NO. CL572-2051-7-71 1/1

TO
PCK