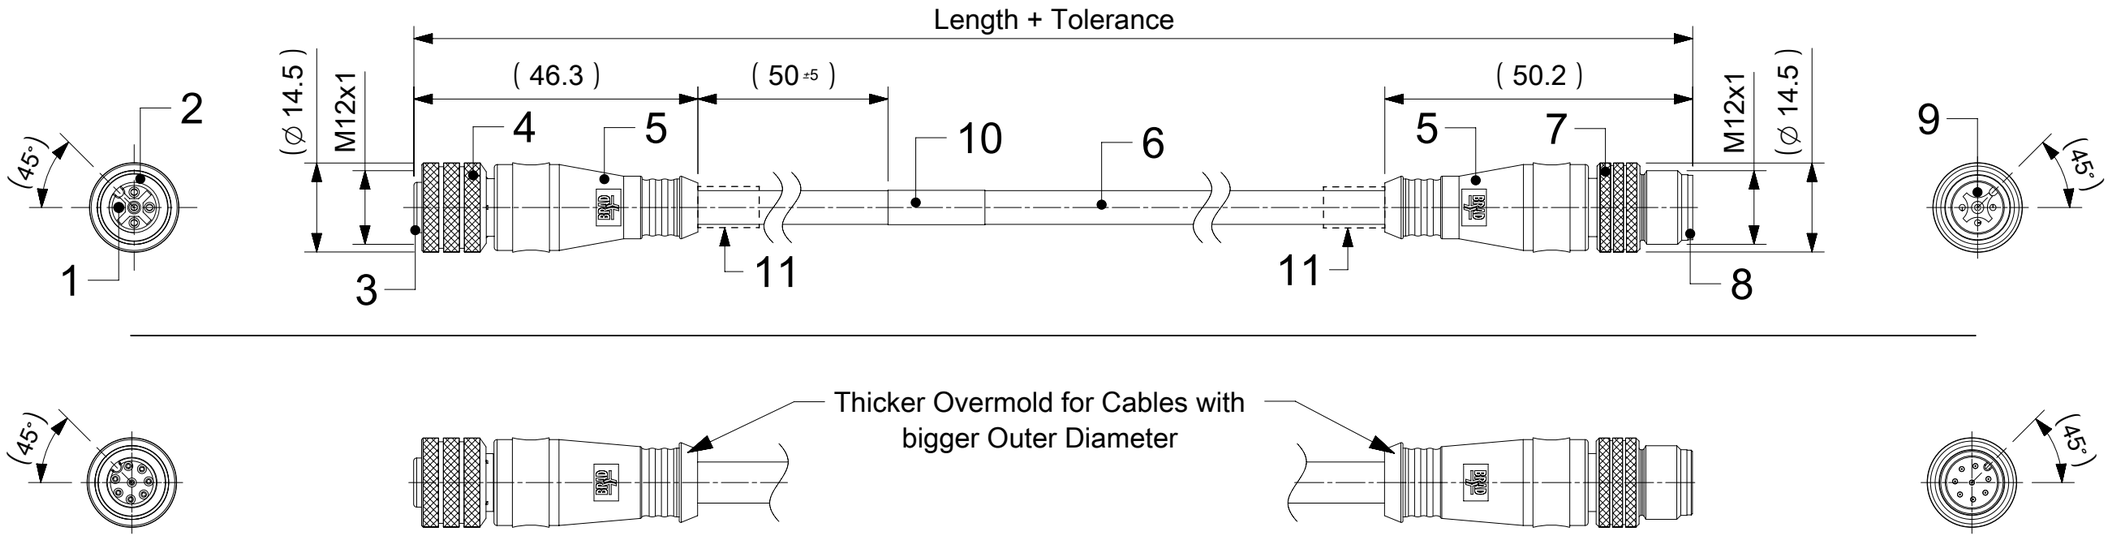
# FEMALE PLUG M12 STRAIGHT TO MALE PLUG M12 STRAIGHT




NOTES:









RATED VOLTAGE: 3, 4 contacts 250V per IEC 60664
5 contacts 60V per IEC 60664
5 contacts 250V per UL 2238
8 contacts 30V per IEC 60664

RATED CURRENT: 3, 4, 5 contacts 4A
8 contacts 2A

PROTECTION CLASS: IP 67


TEMPERATURE: -25°C / +85°C

CONTACTS POSITION FRONT VIEW:

| | 3 CONTACTS | 4 CONTACTS | 5 CONTACTS | 8 CONTACTS |
|---|---|---|---|---|
| FEMALE |  |  |  |  |
| MALE |  |  |  |  |

| CONNECTIONS | PIN | WIRE | PIN | WIRE | PIN | WIRE | PIN | WIRE |
|---|---|---|---|---|---|---|---|---|
| | 1 | BROWN | 1 | BROWN | 1 | BROWN | 1 | WHITE |
| | 2 | --- | 2 | WHITE | 2 | WHITE | 2 | BROWN |
| | 3 | BLUE | 3 | BLUE | 3 | BLUE | 3 | GREEN |
| | 4 | BLACK | 4 | BLACK | 4 | BLACK | 4 | YELLOW |
| | 5 | --- | 5 | --- | 5 | GREY OR GREEN/YELLOW | 5 | GREY |
| | | | | | | | 6 | PINK |
| | | | | | | | 7 | BLUE |
| | | | | | | | 8 | RED |

CODING REQUIRED TO IEC 61076-2-101




FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

| ITEM | QTY. | DESCRIPTION | MATERIAL | FINISH |
|---|---|---|---|---|
| 11 | SEE SHEET 2 | ID CARRIER | PVC | TRANSPARENT |
| 10 | 1 | LABEL YELLOW | VINYL | --- |
| | - | PRINTING FOR CABLES Ixx | --- | --- |
| 9 | 3 / 4 / 5 / 8 | CONTACT MALE | SEE PART LIST | SELECTIVE Au OVER Ni |
| 8 | 1 | INSERT MALE BLACK | TPU | --- |
| 7 | 1 | COUPLING NUT MALE | --- | --- |
| 6 | - | CABLE | SEE SHEET 2 | --- |
| 5 | - | OVERMOULDING BLACK | TPU | --- |
| 4 | 1 | COUPLING NUT FEMALE | --- | --- |
| 3 | 1 | INSERT FEMALE BLACK | PUR | --- |
| 2 | 1 | ORING RED | FPM | --- |
| 1 | 3 / 4 / 5 / 8 | CONTACT FEMALE | SEE PART LIST | SELECTIVE Au OVER Ni |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS: mm | SCALE: 1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | |
|---|---|
| ANGULAR TOL | ± 1.0 ° |
| 4 PLACES | ± |
| 3 PLACES | ± |
| 2 PLACES | ± 0.05 |
| 1 PLACE | ± 0.3 |
| 0 PLACES | ± 0.5 |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: REMOVED OBSOLETED PART NUMBERS AS PER PCN#516585

EC NO: 823299
DRWN: VISHAH2 2025/05/16
CHK'D: GGA 2025/05/29
APPR: GGA 2025/05/29

INITIAL REVISION:
DRWN: JMARSZALEK 2016/09/19
APPR: RSILLER 2016/12/08

THIRD ANGLE PROJECTION | DRAWING: A3-SIZE | SERIES: 120066

molex

CSE M12 XP AC FE STR MA STR XM DE

PRODUCT CUSTOMER DRAWING

| DOCUMENT NUMBER | DOC TYPE | DOC PART | REVISION |
|---|---|---|---|
| 1200668165 | PSD | 000 | A9 |

| MATERIAL NUMBER | CUSTOMER | SHEET NUMBER |
|---|---|---|
| SEE PART LIST | GENERAL MARKET | 1 OF 5 |

| DOCUMENT STATUS | P1 | RELEASE DATE | 2025/05/29 13:28:17 |
|---|---|---|---|

FORMAT: master-tb-prod-A3
REVISION: J1
DATE: 2021/05/01

# ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

| 8 | 8 | X | 0 | 3 | 0 | X | X | X | X | X | X | X | X |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | | OPTIONS |

88=Micro-Change M12x1 Double ended

Contacts:
3=3 Contacts
4=4 Contacts
5=5 Contacts
8=8 Contacts

Heads style:
030=Plug Female Straight to Plug Male Straight

Cable type: See Table

Units:
M=Meter

Length Examples:
005=0.5 unit
010=1 unit
100=10 units

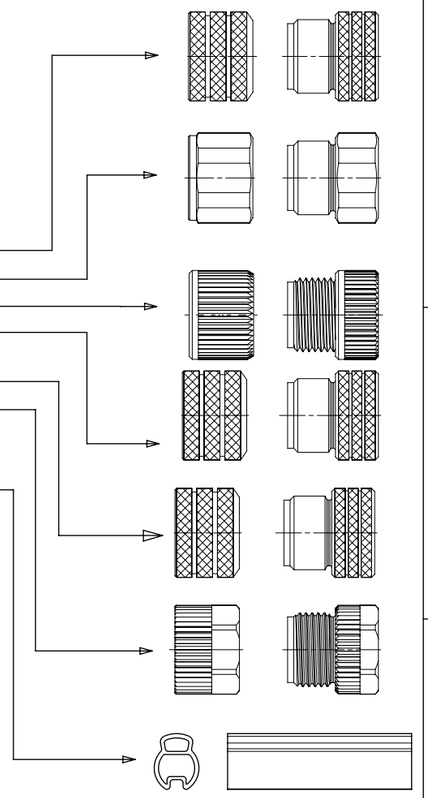
OPTIONS

Overmold color:
Blank (Standard)=Black TPU
Blank=Yellow PVC for cables A09, S19, S20, S26
Blank=Yellow TPE-E for cables K03, K05
A=Grey / G=Black / Y=Yellow

Coupling Nut:
Blank (Standard)=Knurled Brass Ni Plated
1=Hexagonal Stainless steel
5=Knurled Derlin
7=Knurled Brass Ni Plated, Teflon Coated
Blank=7 for cables I20, I26, K03, K05, P82, S26
8=Type 316 stainless steel
9=Knurled / Hexagonal Brass Ni Plated SW13

H= 2 pcs. of I/D Carrier PVC Transparent (Cables Ixx & P82 always with 2 pcs. of I/D Carrier even if no H in Engineering No.)

COUPLING NUT
FEMALE MALE



| CABLE LENGTH TOLERANCES | | |
|---|---|---|
| OVER [mm] | UP TO AND INCLUDING [mm] | TOLERANCES [mm] |
| 0 | 305 | +19 |
| 305 | 915 | +45 |
| 915 | 1830 | +56 |
| 1830 | 3660 | +89 |
| 3660 | 7320 | +165 |
| 7320 | 14640 | +317 |
| 14640 | 30500 | +610 |
| 30500 | > | +2% OF FINISHED LENGTH |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

| DIMENSION UNITS | SCALE |
|---|---|
| mm | 1:1 |

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | | |
|---|---|---|
| ANGULAR TOL | ± | 1.0 ° |
| 4 PLACES | ± | |
| 3 PLACES | ± | |
| 2 PLACES | ± | 0.05 |
| 1 PLACE | ± | 0.3 |
| 0 PLACES | ± | 0.5 |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: REMOVED OBSOLETED PART NUMBERS AS PER PCN#516585

EC NO: 823299
DRWN: VISHAH2 2025/05/16
CHK'D: GGA 2025/05/29
APPR: GGA 2025/05/29

INITIAL REVISION:
DRWN: JMARSZALEK 2016/09/19
APPR: RSILLER 2016/12/08

molex

CSE M12 XP AC FE STR MA STR XM DE

PRODUCT CUSTOMER DRAWING

| DOCUMENT NUMBER | DOC TYPE | DOC PART | REVISION |
|---|---|---|---|
| 1200668165 | PSD | 000 | A9 |

| THIRD ANGLE PROJECTION | DRAWING | SERIES | MATERIAL NUMBER | CUSTOMER | SHEET NUMBER |
|---|---|---|---|---|---|
| | A3-SIZE | 120066 | SEE PART LIST | GENERAL MARKET | 2 OF 5 |

| DOCUMENT STATUS | P1 | RELEASE DATE | 2025/05/29 13:28:17 |
|---|---|---|---|

FORMAT: master-tb-prod-A3
REVISION: J1
DATE: 2021/05/01

# CABLE INFORMATION (for more information see Cable Data Sheet).

| | CABLE TYPE | NO. OF WIRES | CROSS SECTION | CABLE JACKET | UL | CSA | STATIC: TEMP. / BENDING RADIUS | DYNAMIC: TEMP. / BENDING RADIUS | DRAG CHAIN | SHIELD |
|---|---|---|---|---|---|---|---|---|---|---|
| | A09 | 4 | 22AWG | PVC YELLOW | UL 2661 | I/II A/B 80°C/300V | - | - | - | - |
| | B02 | 4 | 18AWG | PUR YELLOW | UL 20549 | I/II A/B 80°C/300V | - | - | - | - |
| | E52 | 3 / 4 | 0.34mm² | PVC GREY | - | - | -30°C to +70°C | -5°C to +70°C | - | - |
| | E57 | 5 | 0.34mm² | PVC GREY | - | - | - | -5°C to +70°C | - | - |
| | I03 | 3 / 4 / 5 | 0.34mm² | PVC CEI GREY | - | - | -30°C to +70°C | -5°C to +70°C | - | - |
| | I20 | 3 / 4 | 0.34mm² | PVC CEI GREY | - | - | -30°C to +70°C | -5°C to +70°C | - | YES |
| | I26 | 5 | 0.34mm² | PVC CEI GREY | - | - | -30°C to +70°C | -5°C to +70°C | - | YES |
| A8 | K03 | 4 / 5 | 18AWG | TPE YELLOW | UL ITC or PLTC | I/II A/B 90°C/300V | max 105°C | - | 2 000 000 cycles, >15xO.D. | - |
| | K05 | 3 / 4 / 5 | 22AWG | TPE YELLOW | UL ITC or PLTC | I/II A/B 90°C/300V | max 105°C | - | 2 000 000 cycles, >15xO.D. | - |
| | P20 | 3 / 4 / 5 | 0.34mm² | PUR BLACK LS0H | - | - | -30°C to +80°C | - | - | YES |
| | P82 | 3 / 4 / 5 | 0.34mm² | PUR IRR ORANGE | - | - | -50°C to +105°C, >5xO.D. | -40°C to +105°C, >7.5xO.D. | - | - |
| | S19 | 8 | 0.25mm² | PVC YELLOW | UL 2661/1569 | C22.2 II A 105°C/300V | -30°C to +105°C, >10xO.D. | -15°C to +105°C, >15xO.D. | 2 000 000 cycles, >15xO.D. | YES |
| | S20 | 3 / 4 / 5 | 0.34mm² | PVC YELLOW | UL 2661/1731 | C22.2 II A 105°C/300V | -30°C to +105°C | - | - | YES |
| | S26 | 5 | 0.34mm² | PVC YELLOW | UL 2661/1731 | C22.2 II A 105°C/300V | -30°C to +105°C | - | - | YES |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

| DIMENSION UNITS | SCALE |
|---|---|
| mm | 1:1 |

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | | |
|---|---|---|
| ANGULAR TOL | ± | 1.0 ° |
| 4 PLACES | ± | |
| 3 PLACES | ± | |
| 2 PLACES | ± | 0.05 |
| 1 PLACE | ± | 0.3 |
| 0 PLACES | ± | 0.5 |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: REMOVED OBSOLETED PART NUMBERS AS PER PCN#516585

EC NO: 823299
DRWN: VISHAH2 2025/05/16
CHK'D: GGA 2025/05/29
APPR: GGA 2025/05/29

INITIAL REVISION:
DRWN: JMARSZALEK 2016/09/19
APPR: RSILLER 2016/12/08

molex

CSE M12 XP AC FE STR MA STR XM DE

PRODUCT CUSTOMER DRAWING

| DOCUMENT NUMBER | DOC TYPE | DOC PART | REVISION |
|---|---|---|---|
| 1200668165 | PSD | 000 | A9 |

| THIRD ANGLE PROJECTION | DRAWING | SERIES | MATERIAL NUMBER | CUSTOMER | SHEET NUMBER |
|---|---|---|---|---|---|
| | A3-SIZE | 120066 | SEE PART LIST | GENERAL MARKET | 3 OF 5 |

| DOCUMENT STATUS | P1 | RELEASE DATE | 2025/05/29 13:28:17 |
|---|---|---|---|

FORMAT: master-tb-prod-A3
REVISION: J1
DATE: 2021/05/01

# PART LIST

| Part No. | Engineering No. | Cable Length |
|---|---|---|
| A09 | | |
| 1200660166 | 883030A09M010 | 1m |
| 1200660261 | 884030A09M005 | 0.5m |
| 1200660262 | 884030A09M006 | 0.6m |
| 1200660266 | 884030A09M010 | 1m |
| 1200660269 | 884030A09M015 | 1.5m |
| 1200660271 | 884030A09M020 | 2m |
| 1200660273 | 884030A09M0208 | 2m |
| 1200660277 | 884030A09M030 | 3m |
| 1200669113 | 884030A09M0308 | 3m |
| 1200660286 | 884030A09M0508 | 5m |
| 1200660291 | 884030A09M070 | 7m |
| 1200660294 | 884030A09M080 | 8m |
| 1200660434 | 885030A09M050 | 5m |
| B02 | | |
| 1200660857 | 884030B02M020 | 2m |
| 1200660860 | 884030B02M030 | 3m |
| 1200660862 | 884030B02M050 | 5m |
| 1200660867 | 884030B02M100 | 10m |
| E52 | | |
| 1200071343 | 883030E52M003A | 0.3m |
| 1200070956 | 883030E52M020A | 2m |
| 1200071026 | 884030E52M010A | 1m |
| 1200661434 | 884030E52M020A | 2m |
| 1200071624 | 884030E52M030A | 3m |
| 1200661472 | 884030E52M050A | 5m |
| 1200070867 | 884030E52M100A | 10m |
| 1200070653 | 884030E52M200A | 20m |
| I03 | | |
| 1200070095 | 883030I03M003 | 0.3m |
| 1200070096 | 883030I03M006 | 0.6m |
| 1200070097 | 883030I03M010 | 1m |
| 1200669149 | 883030I03M010Y | 1m |
| 1200070098 | 883030I03M020 | 2m |
| 1200668632 | 883030I03M020Y | 2m |
| 1200070099 | 883030I03M030 | 3m |
| 1200668633 | 883030I03M030Y | 3m |
| 1200668371 | 883030I03M040 | 4m |
| 1200070100 | 883030I03M050 | 5m |
| 1200668634 | 883030I03M050Y | 5m |
| 1200070101 | 883030I03M100 | 10m |
| 1200070774 | 884030I03M006 | 0.6m |
| | | |
| | | |

| Part No. | Engineering No. | Cable Length |
|---|---|---|
| I03 | | |
| 1200070480 | 884030I03M010 | 1m |
| 1200070481 | 884030I03M020 | 2m |
| 1200668637 | 884030I03M020Y | 2m |
| 1200071627 | 884030I03M0205 | 2m |
| 1200070785 | 884030I03M030 | 3m |
| 1200668372 | 884030I03M040 | 4m |
| 1200070483 | 884030I03M050 | 5m |
| 1200070484 | 884030I03M060 | 6m |
| 1200070485 | 884030I03M100 | 10m |
| 1200668638 | 884030I03M100Y | 10m |
| 1200070961 | 885030I03M030 | 3m |
| 1200668642 | 885030I03M030Y | 3m |
| 1200668165 | 885030I03M100 | 10m |
| 1200669218 | 885030I03M100Y | 10m |
| I20 | | |
| 1200071338 | 884030I20M030 | 3m |
| I26 | | |
| 1200072106 | 885030I26M005 | 0.5m |
| 1200668082 | 885030I26M006 | 0.6m |
| 1200070890 | 885030I26M010 | 1m |
| 1200668639 | 885030I26M010Y | 1m |
| 1200072359 | 885030I26M015 | 1.5m |
| 1200668736 | 885030I26M015Y | 1.5m |
| 1200070891 | 885030I26M020 | 2m |
| 1200668640 | 885030I26M020Y | 2m |
| 1200668281 | 885030I26M025 | 2.5m |
| 1200070892 | 885030I26M030 | 3m |
| 1200668641 | 885030I26M030Y | 3m |
| 1200071279 | 885030I26M050 | 5m |
| 1200668873 | 885030I26M050Y | 5m |
| K03 | | |
| 1200660878 | 884030K03M003 | 0.3m |
| 1200668003 | 884030K03M005 | 0.5m |
| 1200660880 | 884030K03M006 | 0.6m |
| 1200660881 | 884030K03M010 | 1m |
| 1200660883 | 884030K03M020 | 2m |
| 1200660887 | 884030K03M030 | 3m |
| 1200660891 | 884030K03M040 | 4m |
| 1200660895 | 884030K03M050 | 5m |
| 1200660898 | 884030K03M060 | 6m |
| 1200660899 | 884030K03M070 | 7m |
| 1200660900 | 884030K03M080 | 8m |
| 1200660901 | 884030K03M090 | 9m |
| 1200660902 | 884030K03M100 | 10m |
| | | |
| | | |

| Part No. | Engineering No. | Cable Length |
|---|---|---|
| K03 | | |
| 1200668001 | 884030K03M110 | 11m |
| 1200660904 | 884030K03M120 | 12m |
| 1200660905 | 884030K03M140 | 14m |
| 1200660906 | 884030K03M150 | 15m |
| 1200660907 | 884030K03M160 | 16m |
| 1200661543 | 884030K03M180 | 18m |
| 1200660909 | 884030K03M200 | 20m |
| 1200668004 | 884030K03M240 | 24m |
| 1200660911 | 884030K03M250 | 25m |
| 1200661906 | 884030K03M500 | 50m |
| 1200661664 | 885030K03M005 | 0.5m |
| 1200661034 | 885030K03M010 | 1m |
| 1200661035 | 885030K03M020 | 2m |
| 1200661036 | 885030K03M030 | 3m |
| 1200661037 | 885030K03M040 | 4m |
| 1200661038 | 885030K03M050 | 5m |
| 1200661039 | 885030K03M060 | 6m |
| 1200661041 | 885030K03M080 | 8m |
| 1200661042 | 885030K03M090 | 9m |
| 1200661043 | 885030K03M100 | 10m |
| 1200661685 | 885030K03M120 | 12m |
| 1200661490 | 885030K03M140 | 14m |
| 1200661044 | 885030K03M150 | 15m |
| 1200661686 | 885030K03M180 | 18m |
| 1200661687 | 885030K03M230 | 23m |
| 1200661684 | 885030K03M300 | 30m |
| K05 | | |
| 1200660683 | 884030K05M003 | 0.3m |
| 1200660684 | 884030K05M005 | 0.5m |
| 1200660686 | 884030K05M006 | 0.6m |
| 1200660687 | 884030K05M010 | 1m |
| 1200660688 | 884030K05M015 | 1.5m |
| 1200660689 | 884030K05M020 | 2m |
| 1200660690 | 884030K05M030 | 3m |
| 1200669948 | 884030K05M032 | 3.2m |
| 1200660691 | 884030K05M040 | 4m |
| | | |
| | | |

| Part No. | Engineering No. | Cable Length |
|---|---|---|
| K05 | | |
| 1200660692 | 884030K05M050 | 5m |
| 1200668615 | 884030K05M050H | 5m |
| 1200660693 | 884030K05M060 | 6m |
| 1200660915 | 884030K05M070 | 7m |
| 1200660694 | 884030K05M080 | 8m |
| 1200660695 | 884030K05M100 | 10m |
| 1200668616 | 884030K05M100H | 10m |
| 1200660696 | 884030K05M120 | 12m |
| 1200660918 | 884030K05M140 | 14m |
| 1200660697 | 884030K05M150 | 15m |
| 1200660698 | 884030K05M180 | 18m |
| 1200661441 | 884030K05M190 | 19m |
| 1200660921 | 884030K05M200 | 20m |
| 1200660922 | 884030K05M210 | 21m |
| 1200660699 | 884030K05M230 | 23m |
| 1200661438 | 884030K05M250 | 25m |
| 1200665368 | 884030K05M280 | 28m |
| 1200660700 | 884030K05M300 | 30m |
| 1200661649 | 884030K05M400 | 40m |
| 1200669227 | 884030K05M500 | 50m |
| 1200669228 | 884030K05M600 | 60m |
| P20 | | |
| 1200668505 | 884030P20M010 | 1m |
| 1200668506 | 884030P20M020 | 2m |
| 1200668507 | 884030P20M050 | 5m |
| 1200668508 | 884030P20M100 | 10m |
| P82 | | |
| 1200668773 | 885030P82M0107 | 1m |
| 1200665012 | 885030P82M0307 | 3m |
| S19 | | |
| 1200661575 | 888030S19M030 | 3m |
| 1200661576 | 888030S19M050 | 5m |
| 1200661577 | 888030S19M100 | 10m |
| 1200661574 | 888030S19M120 | 12m |
| S20 | | |
| 1200668310 | 883030S20M005 | 0.5m |
| | | |
| | | |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

| | |
|---|---|
| DIMENSION UNITS | mm |
| SCALE | 1:1 |
| GENERAL TOLERANCES (UNLESS SPECIFIED) | |
| ANGULAR TOL | ± 1.0 ° |
| 4 PLACES | ± |
| 3 PLACES | ± |
| 2 PLACES | ± 0.05 |
| 1 PLACE | ± 0.3 |
| 0 PLACES | ± 0.5 |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | |

CURRENT REV DESC: REMOVED OBSOLETED PART NUMBERS AS PER PCN#516585

EC NO: 823299
DRWN: VISHAH2 2025/05/16
CHK'D: GGA 2025/05/29
APPR: GGA 2025/05/29

INITIAL REVISION:
DRWN: JMARSZALEK 2016/09/19
APPR: RSILLER 2016/12/08

molex

CSE M12 XP AC FE STR MA STR XM DE

PRODUCT CUSTOMER DRAWING

| DOCUMENT NUMBER | DOC TYPE | DOC PART | REVISION |
|---|---|---|---|
| 1200668165 | PSD | 000 | A9 |

| THIRD ANGLE PROJECTION | DRAWING | SERIES | MATERIAL NUMBER | CUSTOMER | SHEET NUMBER |
|---|---|---|---|---|---|
| | A3-SIZE | 120066 | SEE PART LIST | GENERAL MARKET | 4 OF 5 |

| DOCUMENT STATUS | P1 | RELEASE DATE | 2025/05/29 13:28:17 |
|---|---|---|---|

FORMAT: master-tb-prod-A3
REVISION: J1
DATE: 2021/05/01

## PART LIST

| Part No. | Engineering No. | Cable Length |
|---|---|---|
| S20 | | |
| 1200070110 | 883030S20M010 | 1m |
| 1200070111 | 883030S20M020 | 2m |
| 1200668172 | 883030S20M050 | 5m |
| 1200071272 | 884030S20M005 | 0.5m |
| 1200071237 | 884030S20M005H | 0.5m |
| 1200071178 | 884030S20M006H | 0.6m |
| 1200668068 | 884030S20M010 | 1m |
| 1200071035 | 884030S20M010H | 1m |
| 1200071238 | 884030S20M015H | 1.5m |
| 1200070499 | 884030S20M020 | 2m |
| 1200071141 | 884030S20M020H | 2m |
| 1200070500 | 884030S20M030 | 3m |
| 1200071137 | 884030S20M030H | 3m |
| 1200071264 | 884030S20M040H | 4m |
| 1200070502 | 884030S20M050 | 5m |
| 1200071188 | 884030S20M050H | 5m |
| 1200070023 | 884030S20M060H | 6m |
| 1200070504 | 884030S20M100 | 10m |
| 1200071161 | 884030S20M100H | 10m |
| S26 | | |
| 1200070597 | 885030S26M010 | 1m |
| 1200668090 | 885030S26M020H | 2m |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

| DIMENSION UNITS | SCALE |
|---|---|
| mm | 1:1 |

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | | |
|---|---|---|
| ANGULAR TOL | ± | 1.0 ° |
| 4 PLACES | ± | |
| 3 PLACES | ± | |
| 2 PLACES | ± | 0.05 |
| 1 PLACE | ± | 0.3 |
| 0 PLACES | ± | 0.5 |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: REMOVED OBSOLETED PART NUMBERS AS PER PCN#516585

EC NO: 823299

| | | |
|---|---|---|
| DRWN: | VISHAH2 | 2025/05/16 |
| CHK'D: | GGA | 2025/05/29 |
| APPR: | GGA | 2025/05/29 |

INITIAL REVISION:

| | | |
|---|---|---|
| DRWN: | JMARSZALEK | 2016/09/19 |
| APPR: | RSILLER | 2016/12/08 |

molex

CSE M12 XP AC FE STR MA STR XM DE

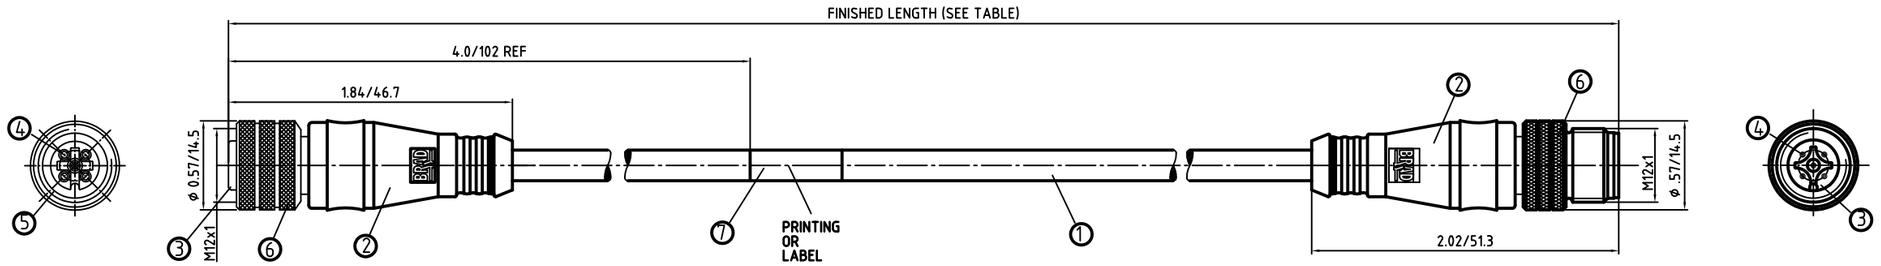
PRODUCT CUSTOMER DRAWING




| DOCUMENT NUMBER | DOC TYPE | DOC PART | REVISION |
|---|---|---|---|
| 1200668165 | PSD | 000 | A9 |


| THIRD ANGLE PROJECTION | DRAWING | SERIES | MATERIAL NUMBER | CUSTOMER | SHEET NUMBER |
|---|---|---|---|---|---|
| | A3-SIZE | 120066 | SEE PART LIST | GENERAL MARKET | 5 OF 5 |

| DOCUMENT STATUS | P1 | RELEASE DATE | 2025/05/29 13:28:17 |
|---|---|---|---|

FORMAT: master-tb-prod-A3
REVISION: J1
DATE: 2021/05/01




| FEMALE FACE VIEW | | |
|---|---|---|
| 3-POLE | 4-POLE | 5-POLE |
|  |  |  |
| WIRING DIAGRAM | | |
| 1 BROWN<br>3 BLUE<br>4 BLACK | 1 BROWN<br>2 WHITE<br>3 BLUE<br>4 BLACK | 1 BROWN<br>2 WHITE<br>3 BLUE<br>4 BLACK<br>5 GREY |

| MALE FACE VIEW | | |
|---|---|---|
| 3-POLE | 4-POLE | 5-POLE |
|  |  |  |
| WIRING DIAGRAM | | |
| 1 BROWN<br>3 BLUE<br>4 BLACK | 1 BROWN<br>2 WHITE<br>3 BLUE<br>4 BLACK | 1 BROWN<br>2 WHITE<br>3 BLUE<br>4 BLACK<br>5 GREY |

**CONNECTOR SPECIFICATION:**

| | |
|---|---|
| VOLTAGE RATING | 250 VAC/VDC |
| AMPERAGE RATING | max. 4 AMPS |
| PROTECTION | IP67 |
| OPERATING TEMPERATURE | -20°C TO 80°C |
| UL CERTIFICATIONS | UL RECOGNIZED, FILE NO. E152210 |
| CSA CERTIFICATIONS | LR6837 |

| ITEM | COMPONENT | MATERIAL | FINISH |
|---|---|---|---|
| 7 | LABLE | MYLAR | BLACK/YELLOW |
| 6 | COUPLER | BRASS | NICKEL PLATED |
| 5 | O-RING | VITON | RED |
| 4 | SOCKET/PIN CONTACT | COPPER ALLOY | GOLD OVER NICKEL |
| 3 | INSERT | NYLON | BLACK |
| 2 | OVERMOLD | TPE | YELLOW |
| 1 | CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V | TPE JACKET | YELLOW |

DESCRIPTION
EC NO: WEU2010-0288 2010/01/25
DRWN: LSTEMMLE 2010/01/25
CH'KD: NS ----
APPR: NSTAUDIG 2010/01/29
DESCRIPTION
REV 1

QUALITY SYMBOLS
▼ = 0
Ⓒ = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | mm | INCH |
|---|---|---|
| 4 PLACES | ±--- | ±--- |
| 3 PLACES | ±--- | ±--- |
| 2 PLACES | ±--- | ±.01 |
| 1 PLACE | ±0.3 | ±--- |
| ANGULAR ± | --- ° | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 2:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: LSTEMMLE DATE: 2010/01/25
CHECKED BY: RE DATE: 2010/01/26
APPROVED BY: NSTAUDIG DATE: 2010/01/29

MICRO-CHANGE CORDSET
3/4/5 P. FE STR/ MA STR
18/3-5 YELLOW TPE CABLE

MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-120066-012
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

| POL | MATERIAL NUMBER | ENGINEERING NUMBER | FINISHED LENGTH |
|---|---|---|---|
| 4 | 1200660854 | 884030B02M010 | 1.0M +55.6 -0 [3.27' +2.19" -0] |
| 4 | 1200660856 | 884030B02M015 | 1.5M +55.6 -0 [4.91' +2.19" -0] |
| 4 | 1200660857 | 884030B02M020 | 2.0M +88.9 -0 [6.56' +3.50" -0] |
| 4 | 1200660859 | 884030B02M020 | 2.5M +88.9 -0 [8.18' +3.50" -0] |
| 4 | 1200660860 | 884030B02M030 | 3.0M +88.9 -0 [9.84' +3.50" -0] |
| 4 | 1200660861 | 884030B02M040 | 4.0M +165.1 -0 [13.12' +6.50" -0] |
| 4 | 1200660862 | 884030B02M050 | 5.0M +165.1 -0 [16.40' +6.50" -0] |
| 4 | 1200660864 | 884030B02M060 | 6.0M +165.1 -0 [19.69' +6.50" -0] |
| 4 | 1200660865 | 884030B02M070 | 7.0M +165.1 -0 [22.96' +6.50" -0] |
| 4 | 1200660866 | 884030B02M080 | **8.0M +317.5 -0 [26.25' +12.50' -0]** |
| 4 | 1200660867 | 884030B02M100 | **10.0M +317.5 -0 [32.81' +12.50' -0]** |

DESCRIPTION
EC NO: WEU2010-0288 2010/01/25
DRWN: LSTEMMLE 2010/01/25
CH'KD: NS ----
APPR: NSTAUDIG 2010/01/29
DESCRIPTION

1
REV

QUALITY SYMBOLS
▼ = 0
Ⓒ = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | mm | INCH |
|---|---|---|
| 4 PLACES | ±--- | ±--- |
| 3 PLACES | ±--- | ±--- |
| 2 PLACES | ±--- | ±.01 |
| 1 PLACE | ±0.3 | ±--- |
| ANGULAR ± --- ° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 2:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: LSTEMMLE DATE: 2010/01/25
CHECKED BY: RE DATE: 2010/01/26
APPROVED BY: NSTAUDIG DATE: 2010/01/29

MICRO-CHANGE CORDSET
3/4/5 P. FE STR/ MA STR
18/3-5 YELLOW TPE CABLE

molex MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-120066-012
SHEET NO.: 1 OF 1

SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION