1-1718484-1 ✔ ACTIVE

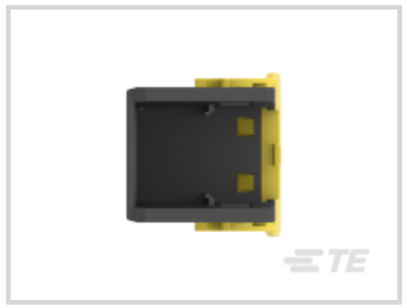
AMP | AMP MCP Connector System

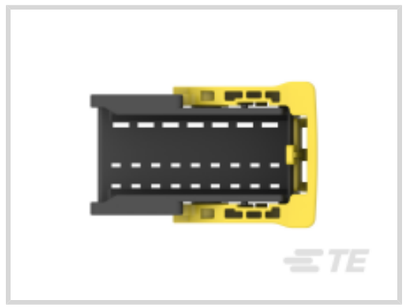
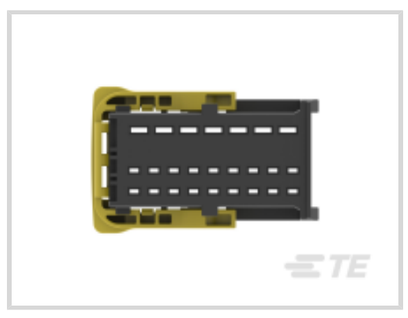
TE Internal #: 1-1718484-1

12 V, 25 Position, Automotive Housing for Female Terminals, Wire-to-Wire, 4 mm / 5 mm [.157 in / .197 in] Centerline, Black, AMP MCP Connector System

View on TE.com >

Automotive Parts > Automotive Connectors > Automotive Housings > AMP Unsealed Connector Housing

Nominal Voltage Architecture: **12 V**

Connector & Housing Type: **Housing for Female Terminals**

Number of Positions: **25**

Sealable: **No**

Operating Temperature Range: **-40 – 120 °C [-40 – 248 °F]**

All AMP Unsealed Connector Housing (109)

Features

Product Type Features

Mixed & Hybrid Connector	Yes
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Sealable	No
Primary Locking Feature	Integrated in Housing
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	25
Number of Rows	3

Electrical Characteristics

Operating Voltage	36 VDC

Nominal Voltage Architecture	12 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	A

Contact Features

Contact Size	1.5K, 2.8mm
Contact Type	Receptacle
Mating Tab Width	1.6 mm, 2.8 mm[.062 in][.11 in]
Contact Current Rating (Max)	23 A, 29 A

Mechanical Attachment

Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT/ASA-GF20
Centerline (Pitch)	4 mm, 5 mm[.157 in][.197 in]

Dimensions

Row-to-Row Spacing	4.2 mm, 8.1 mm[.165 in][.319 in]
Product Width	27.5 mm[1.08 in]
Product Length	42.3 mm[1.66 in]
Connector Height	26 mm[1.02 in]

Usage Conditions

Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
Operating Temperature (Max)	120 °C[248 °F]

Operation/Application

Circuit Application	Power

Industry Standards

UL Flammability Rating	UL 94HB

Packaging Features

Packaging Quantity	900
Packaging Method	Box

Other

Serviceable	No
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 2112286-1
COVER,90,FOR REC. CARRIER 25/36P



TE Part # CAT-AM705-CH8173
AMP Unsealed Connector Housing



TE Part # CAT-AM705-T273
AMP MCP, RECEPTACLE AND TAB

TE Part # 1-1670614-2
36POS,MIXED,HEADER HSG,CONV. KIT 25POS

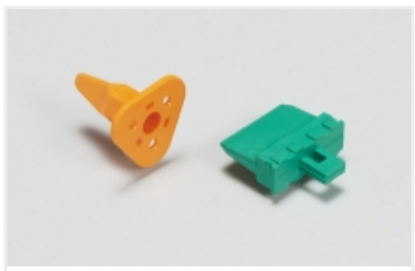


TE Part # 1-1579007-1
EXTRACTION TOOL



TE Part # 1-1670615-2
36POS,MIXED,HEADER ASSY,CONV. KIT 25POS

Also in the Series | AMP MCP Connector System



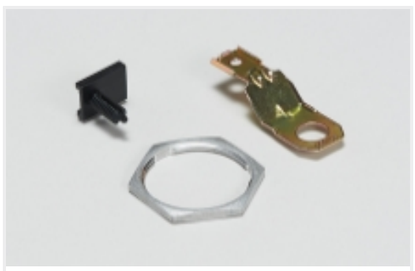
Automotive Connector Locks & Position Assurance(5)



Automotive Seals & Cavity Plugs(6)



Automotive Signal & Power Connector Housings(83)



Other Automotive Connector Accessories(4)

Customers Also Bought



TE Part #1-967626-4
TAB HOUSING, 2,8MM 9 POS.



TE Part #CAT-AM705-CH8173
AMP Unsealed Connector Housing



TE Part #1-967630-3
FLACHSTE-GEH2,8 21P



TE Part #1-1718485-2
CARRIER FOR RECEPT. INSERTS 36 POS

TE Part #4062-006-04141
SOC, SOLID, SIZE 4, 4AWG, NI

TE Part #K1161961-1
Plunger Switch 44-01-076 C4314

TE Part #K1161960-1
Plunger Switch 44-01-074 C4314

TE Part #4060-005-04141
PIN, SOLID, SIZE 4, 4AWG, NI

Documents

Product Drawings

CARRIER FOR RECEPTACLE INSERTS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1718484-1_D_c-1-1718484-1-d.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1718484-1_D_c-1-1718484-1-d.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1718484-1_D_c-1-1718484-1-d.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

German