

**Raychem** | **Thermofit® Division Europe** | **Specification Control Drawing**

# 202D211-100 to 202D299-100

a) Part as supplied

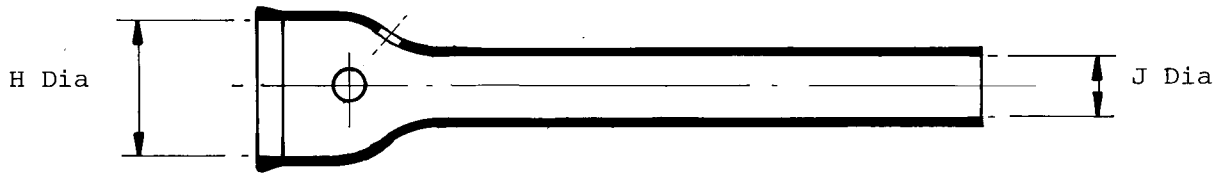


b) Part after unrestricted recovery

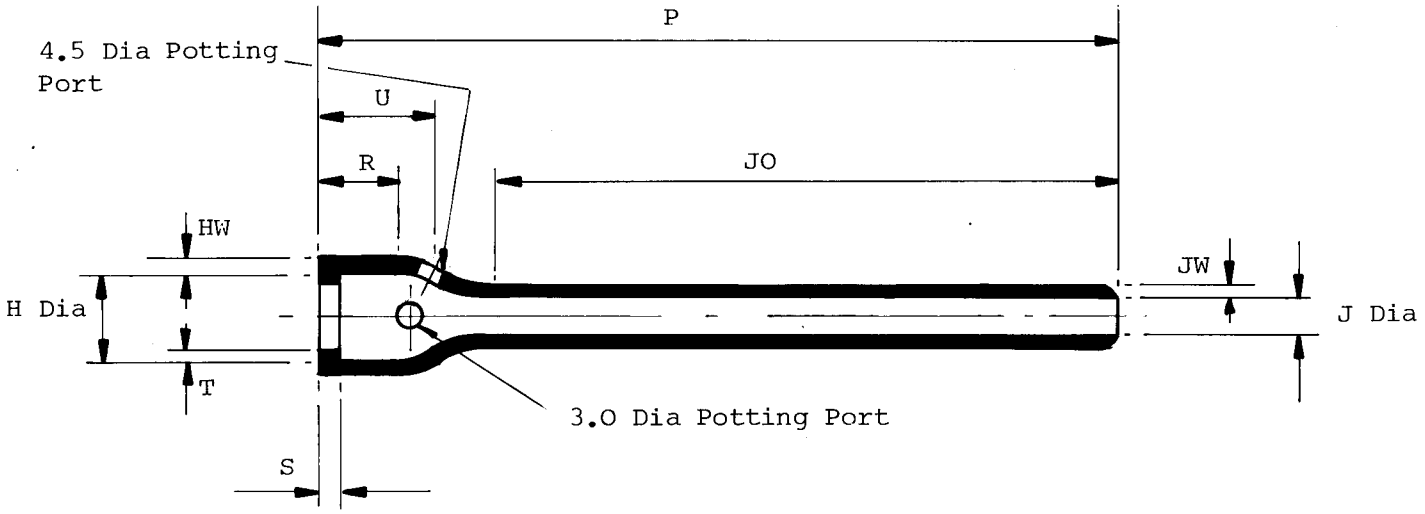


Dimensions in millimetres

| Part No. | H min a | H max b | J min a | J max b | P ±10% b | JO ±10% b | R Ref b | S Ref b | T Ref b | HW ±20% b | JW ±20% b | U ±10% b |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 202D211 | 22.0 | 11.4 | 16.0 | 6.4 | 106 | 86 | 12 | 3.0 | 1.0 | 1.5 | 1.1 | 14 |
| 202D221 | 26.0 | 15.0 | 19.0 | 7.4 | 121 | 99 | 12 | 3.0 | 1.0 | 1.5 | 1.1 | 15 |
| 202D232 | 30.0 | 18.8 | 21.0 | 8.4 | 139 | 113 | 12 | 3.0 | 1.0 | 1.8 | 1.1 | 15 |
| 202D242 | 34.0 | 22.9 | 24.0 | 9.7 | 160 | 131 | 12 | 3.0 | 1.0 | 1.8 | 1.1 | 16 |
| 202D253 | 37.0 | 29.5 | 26.0 | 10.4 | 178 | 142 | 14 | 3.0 | 1.7 | 2.0 | 1.1 | 18 |
| 202D263 | 44.0 | 34.0 | 31.0 | 12.2 | 203 | 163 | 15 | 3.0 | 1.7 | 2.0 | 1.1 | 20 |
| 202D274 | 50.0 | 41.2 | 36.0 | 14.2 | 203 | 158 | 15 | 3.0 | 1.7 | 2.3 | 1.4 | 21 |
| 202D285 | 63.0 | 47.0 | 44.0 | 17.5 | 203 | 153 | 16 | 3.0 | 2.0 | 2.5 | 1.4 | 23 |
| 202D296 | 69.0 | 59.7 | 49.0 | 19.6 | 203 | 143 | 16 | 3.0 | 2.0 | 2.5 | 1.4 | 24 |
| 202D299 | 82.0 | 67.1 | 57.0 | 22.9 | 203 | 138 | 16 | 3.0 | 2.0 | 2.5 | 1.4 | 31 |

**Copyright(!)**
**Urheberrechte**
The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced, or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn M.Rogers Checked [signature] Issue 1 Date Dec '85

Conforms to ISO Recommendations
3rd Angle Projection
Not to scale

**Approval**
Design [signature] MKTG [signature] Q.C. [signature]

# Ordering Information

202D963-*/**-0

- Adhesive Slash Number (if required see compatibility chart)
- Material Dash Number (see compatibility chart)
- Base Part Number

# COMPATIBILITY CHART

| MATERIAL DASH NUMBER | MATERIAL DESCRIPTION | COATING SLASH NUMBER |
|---|---|---|
| -12 | VITON | N/A |
| -100 | ZERO HALOGEN | /86,/180 |
| | | |
| | | |
| | | |
| | | |
| | | |

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

POTTING PORTS ARE OPTIONAL
WHEN SPECIFIED BY SUFFIX "-00"
THEY WILL BE LOCATED AS SHOWN

Raychem
Electronics OEM Division Europe
Swindon, Wiltshire, England.
Telephone: (01793) 528171 Fax: 573923