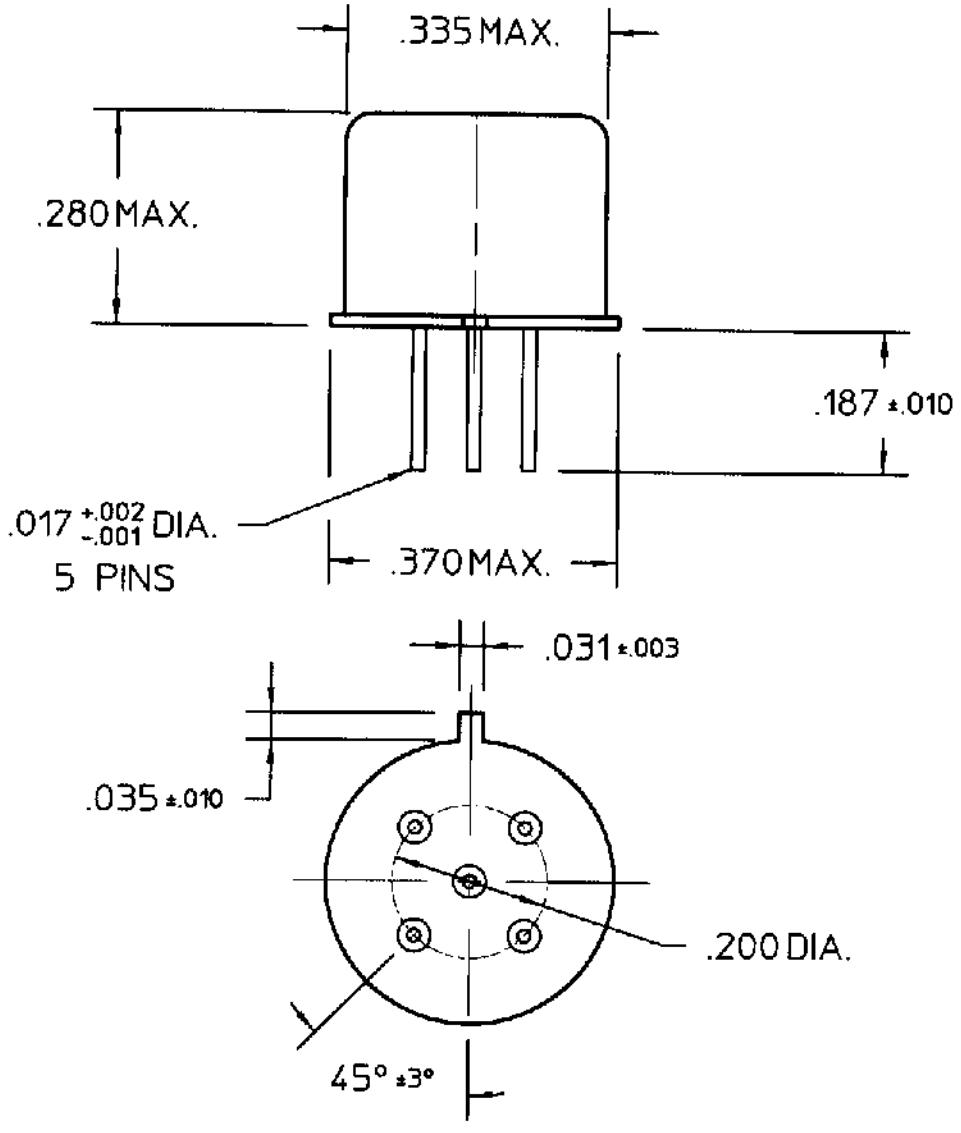


REV. 0

DCO 141062

COIL: @ 25°C

RESISTANCE 50 OHMS ±10%

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 3.5 VDC

MUST RELEASE 1.7 VDC MAX., 0.23 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.
RELEASE TIME 4.0 MS MAX.
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 5/13/99 CK [illegible] 5/13/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/24-019L

TYPE J1MADDRELAY

J1MAPDD-5XL

F-718 REV 1