
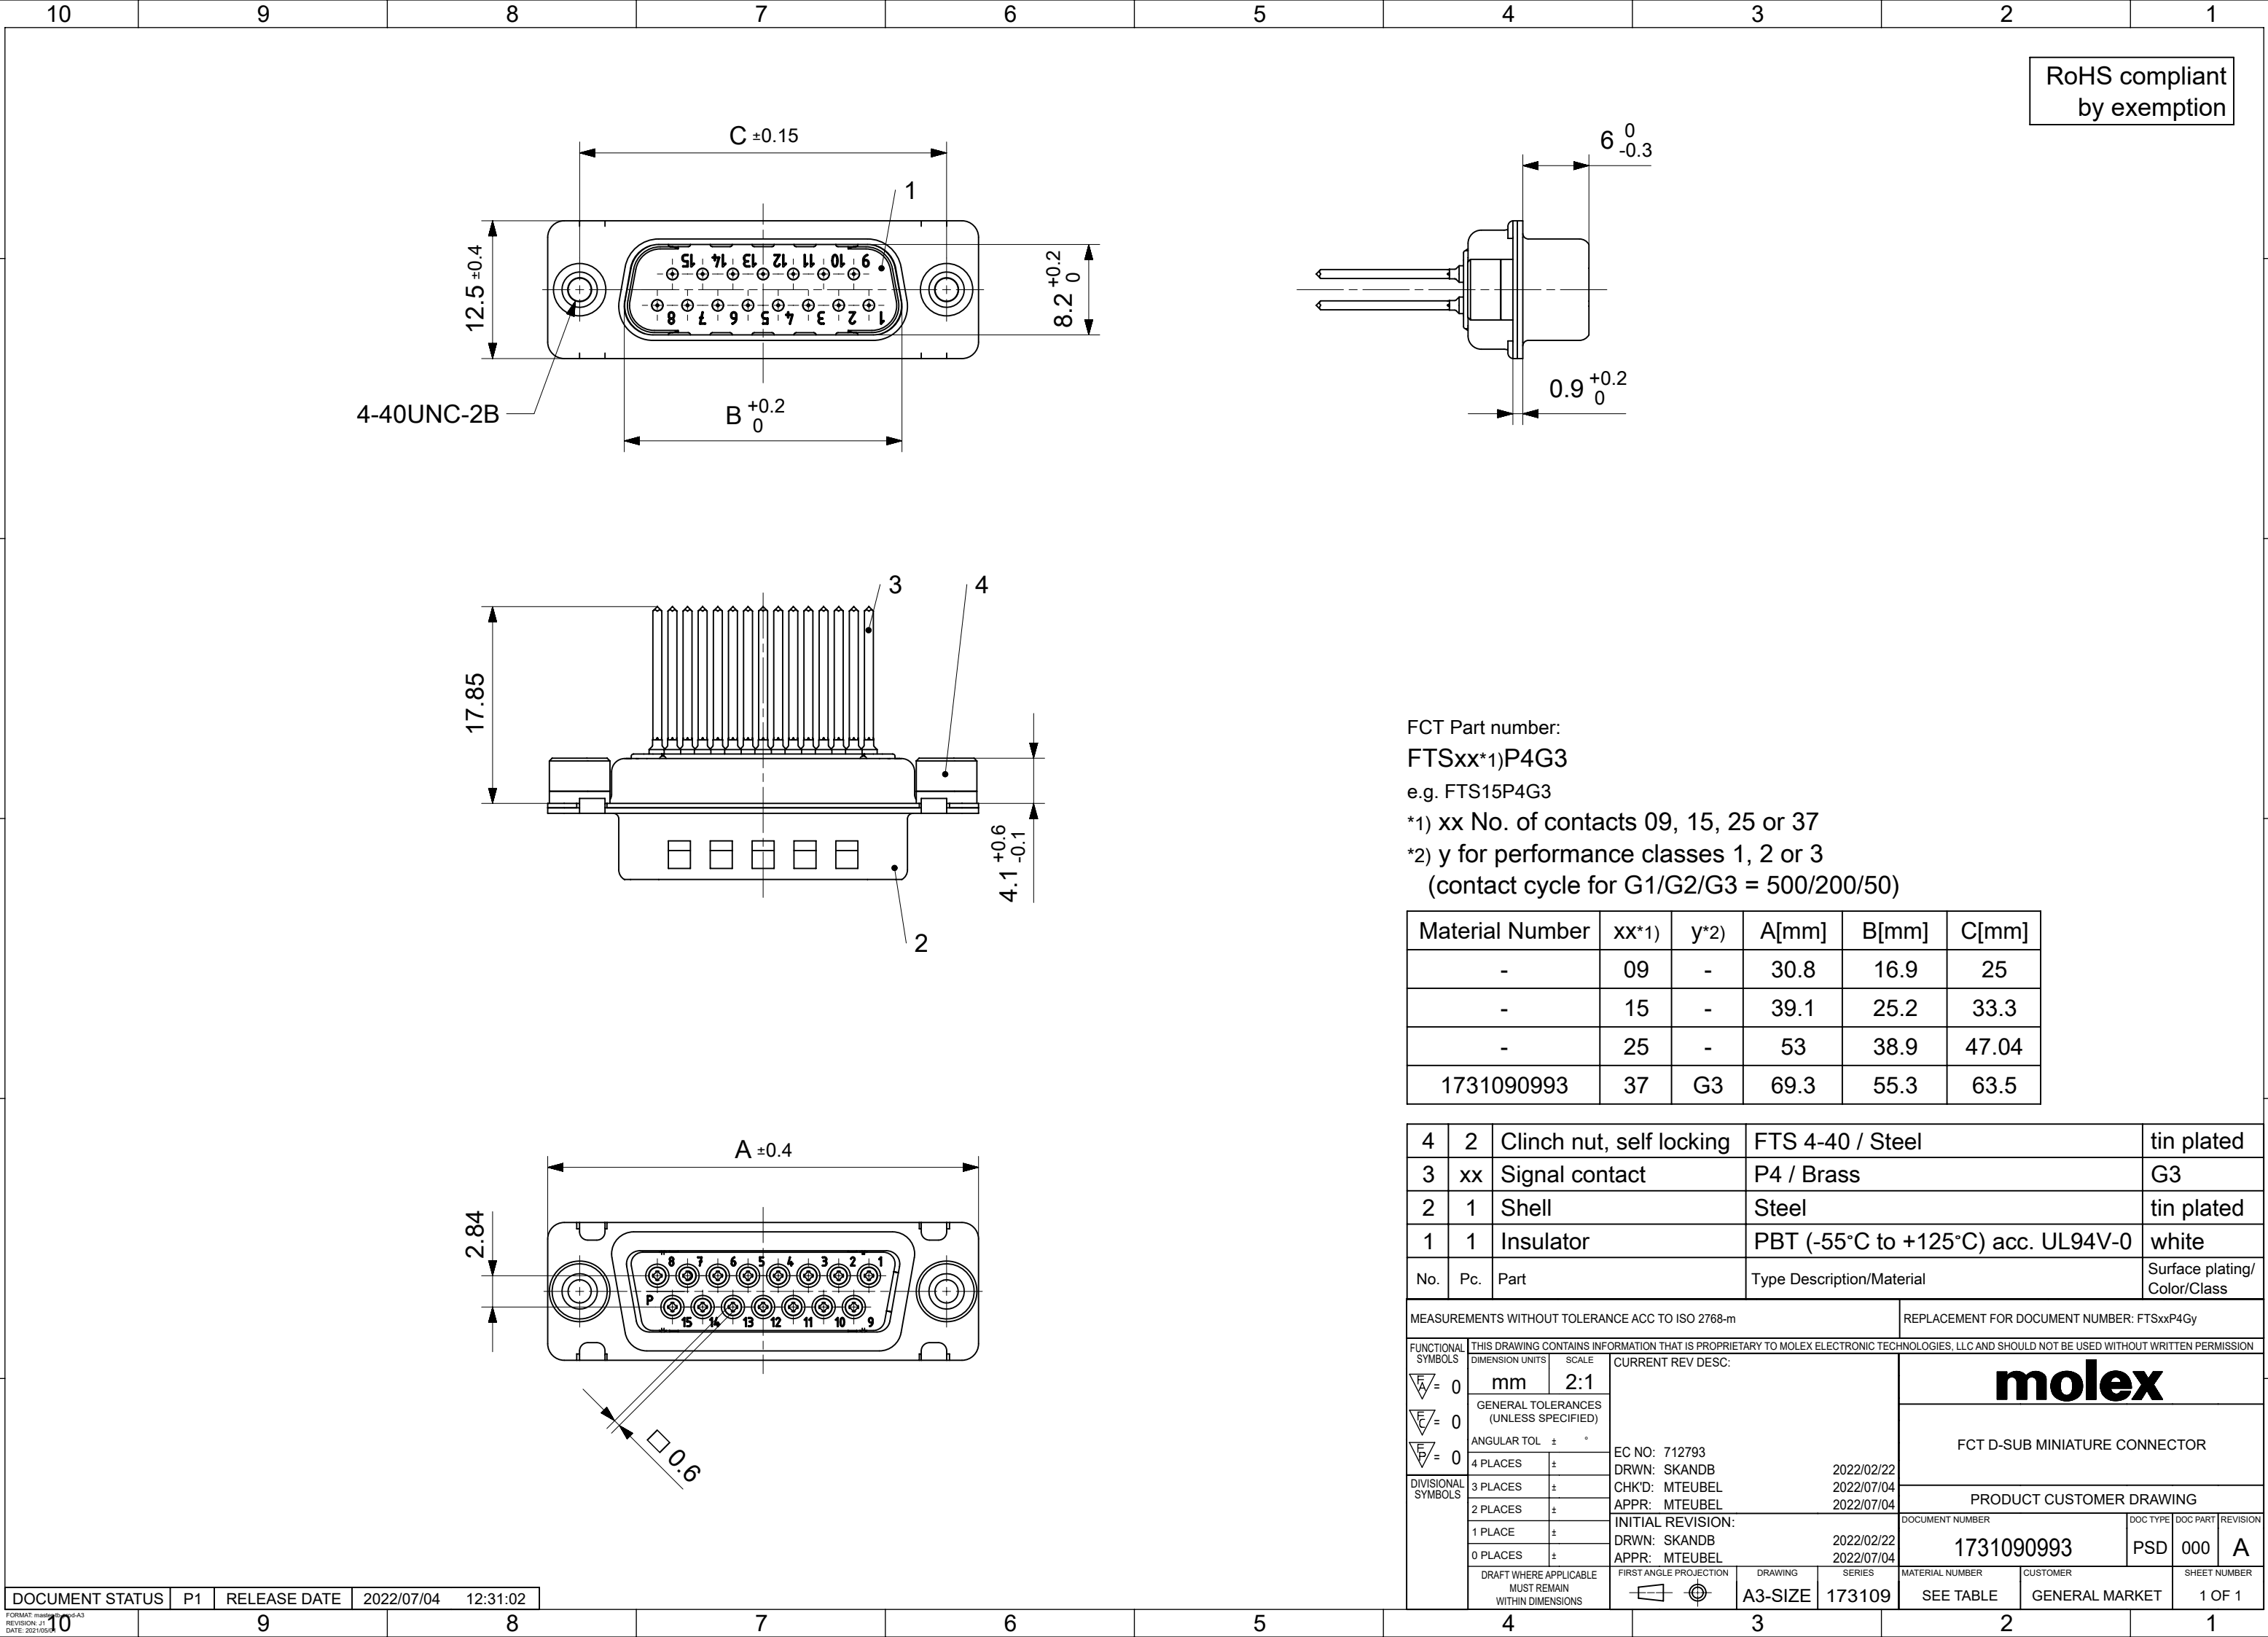
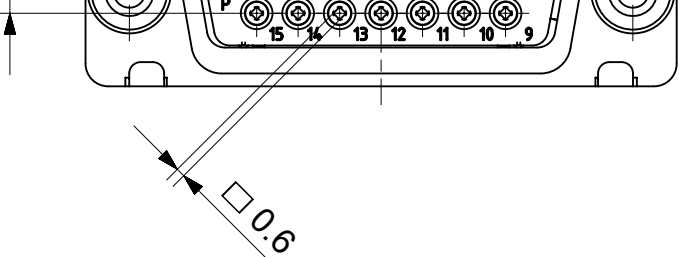




FCT Part number:
FTSxx*1)P4G3
e.g. FTS15P4G3
*1) xx No. of contacts 09, 15, 25 or 37
*2) y for performance classes 1, 2 or 3
(contact cycle for G1/G2/G3 = 500/200/50)

Material Number	xx*1)	y*2)	A[mm]	B[mm]	C[mm]
-	09	-	30.8	16.9	25
-	15	-	39.1	25.2	33.3
-	25	-	53	38.9	47.04
1731090993	37	G3	69.3	55.3	63.5

4	2	Clinch nut, self locking	FTS 4-40 / Steel	tin plated
3	xx	Signal contact	P4 / Brass	G3
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +125°C) acc. UL94V-0	white
No.	Pc.	Part	Type Description/Material	Surface plating/ Color/Class

					MEASUREMENTS WITHOUT TOLERANCE ACC TO ISO 2768-m					REPLACEMENT FOR DOCUMENT NUMBER: FTSxxP4Gy							
FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
		DIMENSION UNITS		SCALE		CURRENT REV DESC:											
		mm		2:1													
		GENERAL TOLERANCES (UNLESS SPECIFIED)															
F _A = 0						EC NO: 712793 DRWN: SKANDB CHK'D: MTEUBEL APPR: MTEUBEL											
F _E = 0																	
F _E = 0																	
		ANGULAR TOL		± °		2022/02/22 2022/07/04 2022/07/04											
		4 PLACES		±													
DIVISIONAL SYMBOLS		3 PLACES		±													
		2 PLACES		±													
		1 PLACE		±													
		0 PLACES		±													
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		FIRST ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
						A3-SIZE		173109		1731090993		PSD		000		A	
										MATERIAL NUMBER		CUSTOMER				SHEET NUMBER	
										SEE TABLE		GENERAL MARKET				1 OF 1	
DOCUMENT STATUS		P1		RELEASE DATE		2022/07/04		12:31:02									