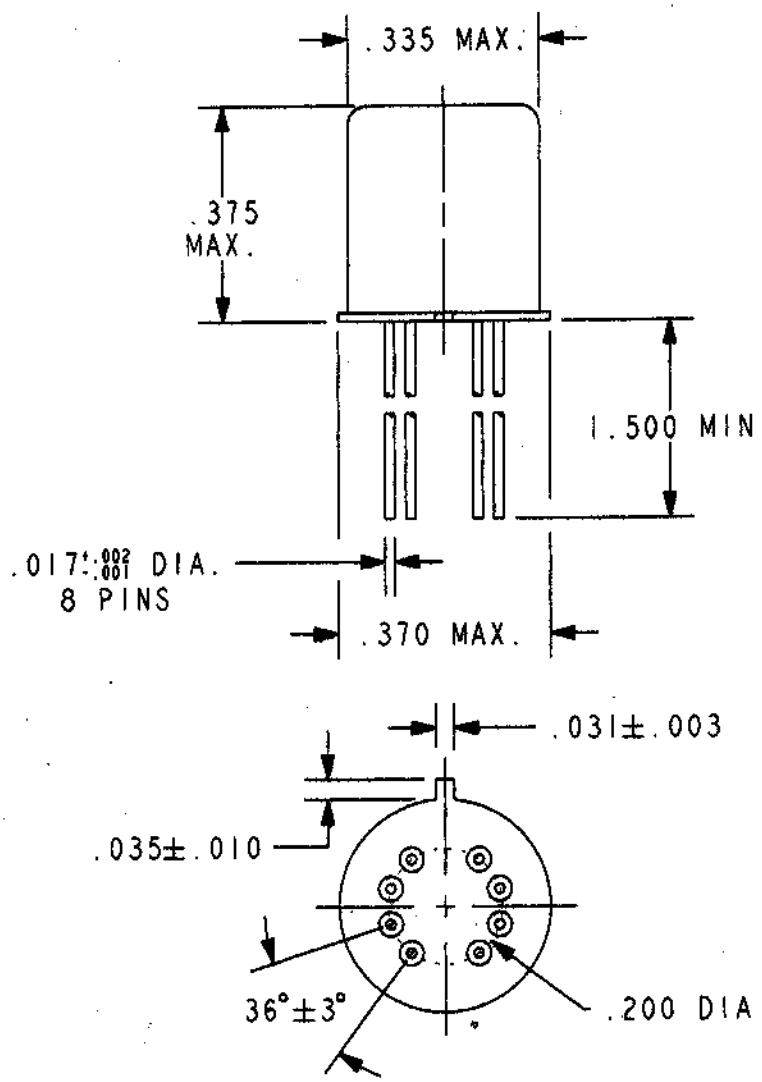


REV. 0
DCO 143435

COIL: @ 25°C

RESISTANCE	3300 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.0 VDC
MUST RELEASE	8.0 VDC MAX., 1.4 VDC MIN.

ENVIRONMENT:


VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.
RELEASE TIME 2.0 MS MAX.
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 1/30/02 EK 1/30/02

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/11-023L REV.

"JMS" RELAY

JMSW-26XL

F-116 REV. A