
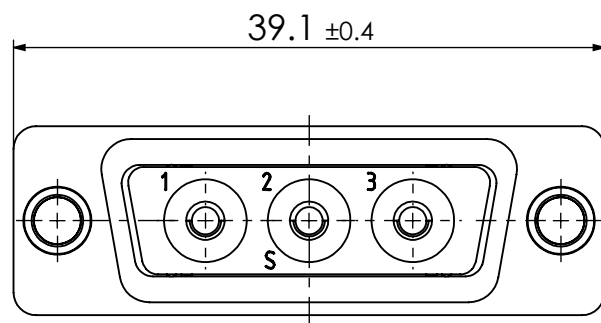
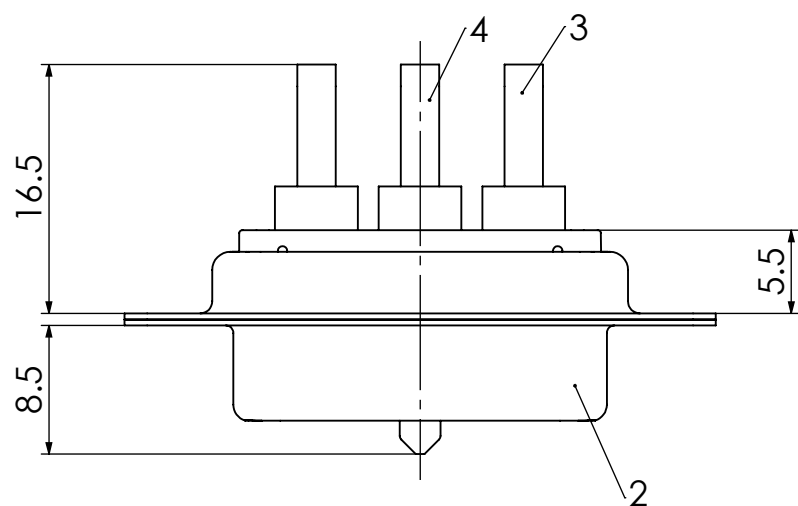
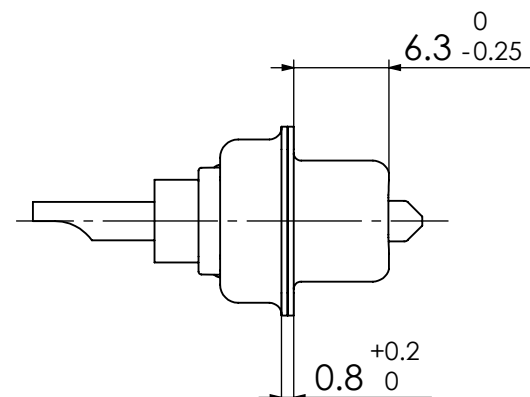


RoHS compliant
by exemption

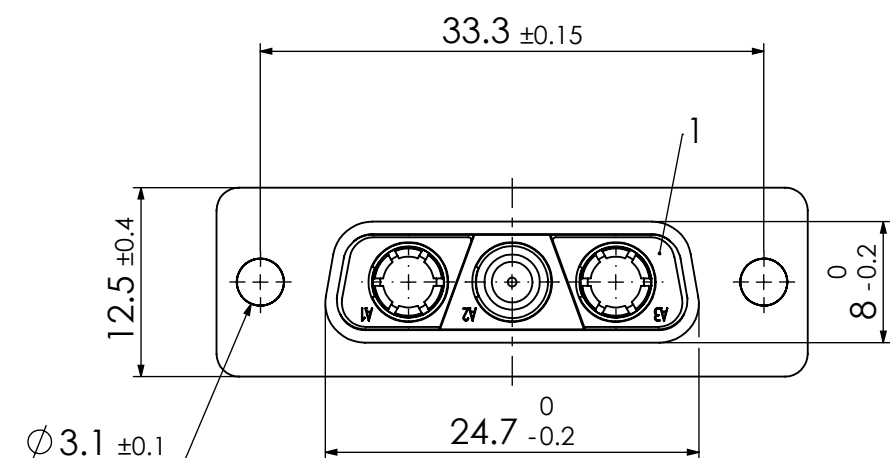

4	1	High power contact	FMA026P103	10A / AWG 16-20
3	2	High power contact	FMP005S103	10A / AWG 16-20
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	black
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class

FUNCTIONAL SYMBOLS = 0 = 0 = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS		SCALE		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m			molex FACT D-Sub Mixed-Layout Connector		
	mm		2:1		CURRENT REVISION					
			DRWN: DRAWN BY msteinbrueck 20-09-2023							
			APPR: APPR BY mteubel 22-11-2023							
					INITIAL REVISION			PRODUCT CUSTOMER DRAWING		
	2		24410		DRWN: DRAWN BY Markus.Jobst 08-07-2010			MATERIAL NUMBER		REVISION
	1				APPR: APPR BY birgit.rinder 08-07-2010			1731070808		2
	REV.		CH.-NO.							
	REPLACEMENT FOR:		FRIST ANGLE PROJECTION		DRAWING		DOCUMENT NUMBER		CUSTOMER	
1731070808_Rev. A1				A3-SIZE		F3W3SC-4421		GENERAL MARKET		1 OF 1

COMMENT: ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT, IT MAY NEITHER BE DUBICATED NOR MADE AVAILABLE TO A THIRD PARTY, AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.