




Connectors > Terminal Blocks & Strips > PCB Terminal Blocks

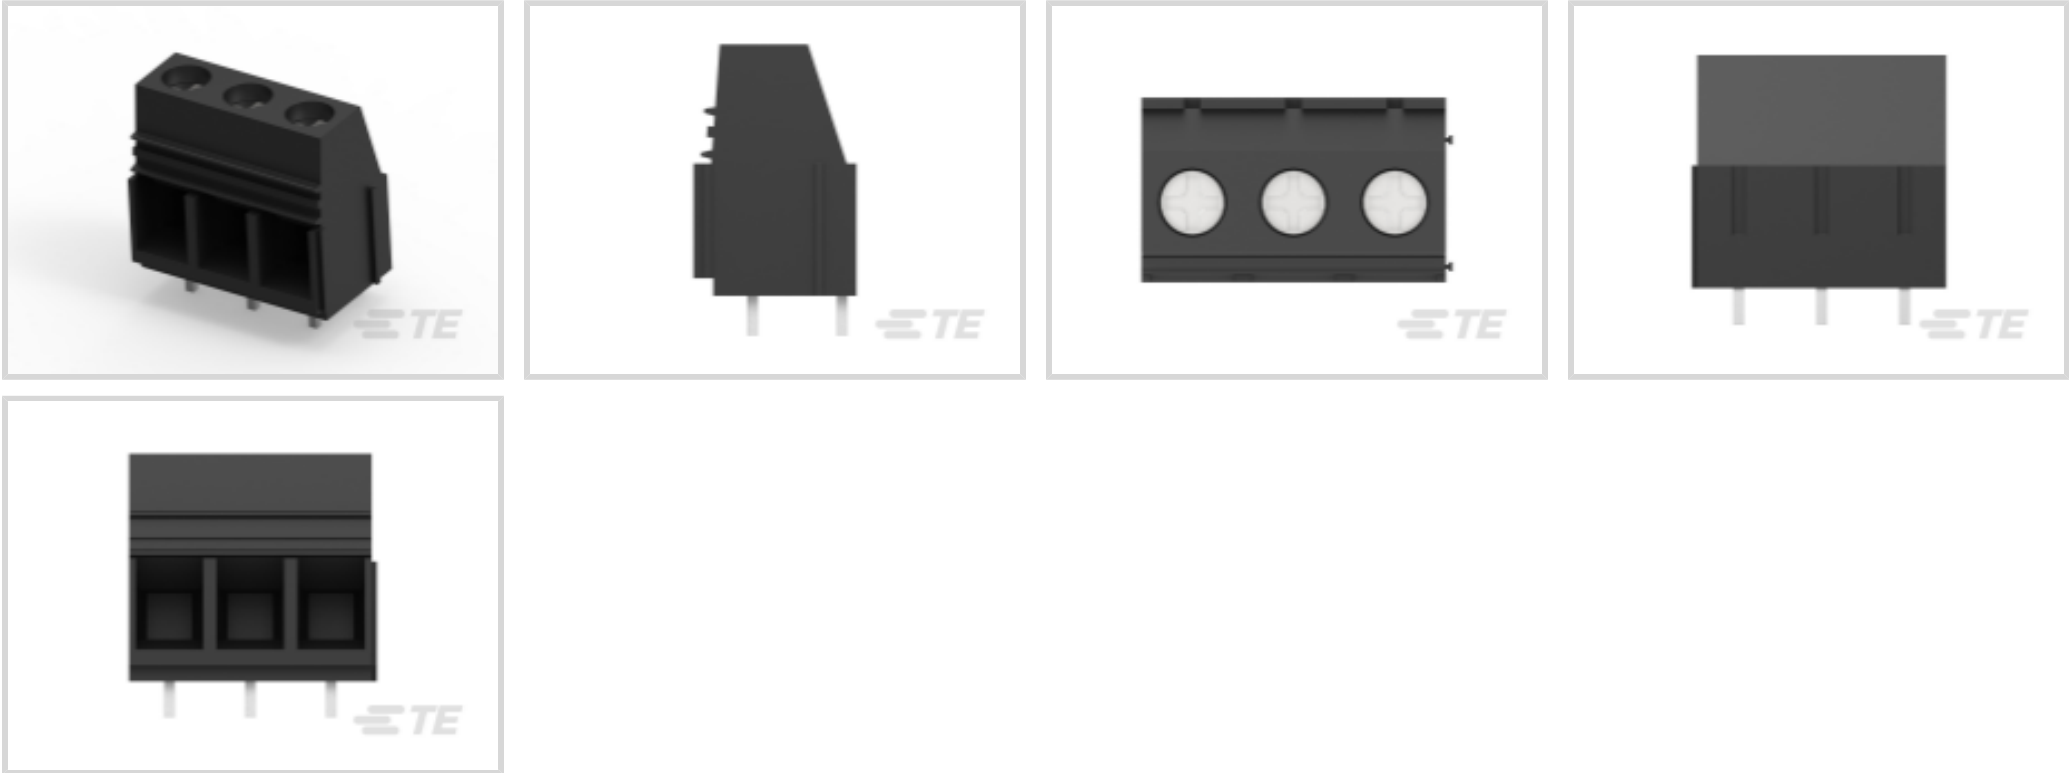

Terminal Block Connector Type: **Header**

Connector System: **Wire-to-Board**

Number of Positions: **3**

Centerline (Pitch): **10.16 mm [.4 in]**

Number of Rows: **1**

Features

Product Type Features

Wire Protection	With
Header Type	Fully Shrouded
Terminal Block Connector Type	Header
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board, Wire & Cable

Configuration Features

Stacking Configuration	Side Stackable
Stacked Levels	Without
Number of Positions	3
Number of Rows	1
Wire Entry Angle	90°
Wire Entry Location	Side

Electrical Characteristics

Operating Voltage	300 VAC
-------------------	---------



Body Features

Primary Product Color	Black
Product Orientation	Vertical

Contact Features

Contact Mating Area Plating Material	Tin (Sn)
Contact Base Material	Brass
Contact Current Rating (Max)	65 A

Termination Features

Termination Post & Tail Length	4.5 mm[.177 in]
Termination Method to PCB	Through Hole - Solder
Termination Method to Wire & Cable	Screw

Mechanical Attachment

Screw Plating Material	Zinc
Screw Material	Steel
Thread Size	M4
Connector Mounting Type	Board Mount

Housing Features

Housing Material	PA 66
Centerline (Pitch)	10.16 mm[.4 in]

Dimensions

Wire Size	26 – 6 AWG
-----------	------------

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application


Circuit Application	Power & Signal
---------------------	----------------

Packaging Features

Packaging Method	Box & Carton
Packaging Quantity	175

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>





EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




Customers Also Bought






TE Part #CONN003-W
N Type Jack 50 Ohm Panel Mount

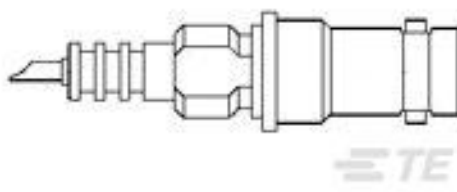


TE Part #51494-2
STD HIGH VOLTAGE BLKHD RECEPT



TE Part #66103-4
III+ PIN,24-20,30AU/FL,LP



TE Part #282837-2
TERMI-BLOK PCB MOUNT 2P

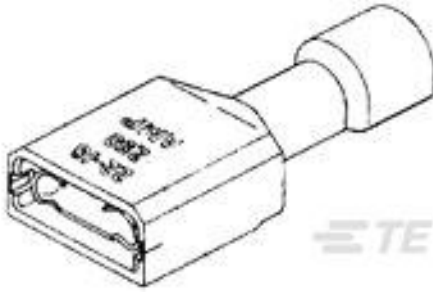

TE Part #3-350816-2
ULTRAFast 187 ASSY REC 16-14 TPBR LP



TE Part #1393219-6
PE014012



TE Part #1-1825910-8
FSM10JH=6MM TACT SWITCH, HIGH TEMP



TE Part #1-2176070-2
3521 30R 1% 2W



TE Part #1-2176325-9
CRGP 0402 330R 1%



TE Part #1-2199230-5
M.2 0.5PITCH 4.2H KEY M 15U" AU"

Documents

Product Drawings

3 Posn Power Connector, Black, 10.16mm

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1986660-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1986660-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1986660-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

1-1986660-3

3 Position PCB Terminal Block, Header, Wire-to-Board, 10.16 mm [.4 in] Centerline, 1 Row, 90° Wire Entry Angle, 26 – 6 AWG, 300 VAC



BUCHANAN TERMINAL BLOCKS CATALOG - EUROSTYLE TERMINAL BLOCKS

English