776487-4 ✔ ACTIVE

AMP | AMPSEAL 16

TE Internal #: 776487-4

12 V / 24 V / 48 V, 4 Position, Automotive Plug, Wire-to-Wire, 5.3 mm [.209 in] Centerline, Sealable, Black, Wire & Cable, AMPSEAL 16

View on TE.com >

Automotive Parts > Automotive Connectors > Automotive Housings > AMPSEAL 16 Housings



Nominal Voltage Architecture: **12 V, 24 V, 48 V, 240 V**

Connector & Housing Type: **Plug**

Number of Positions: **4**

Sealable: **Yes**

Operating Temperature Range: **-40 – 125 °C [-40 – 257 °F]**

All AMPSEAL 16 Housings (224)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Plug
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	4
Number of Rows	2

Electrical Characteristics

Operating Voltage	250 VDC
Nominal Voltage Architecture	12 V, 24 V, 48 V, 240 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black

Connector & Keying Code	D

Contact Features

Contact Size	1.5mm
Contact Type	Socket
Mating Pin Diameter	1.5 mm[.06 in]

Mechanical Attachment

Strain Relief	Add By Accessory
Terminal Position Assurance	Yes
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	5.3 mm[.209 in]

Dimensions

Row-to-Row Spacing	4.5 mm[.177 in]
Product Width	36.7 mm[1.445 in]
Product Length	25.33 mm[.997 in]
Connector Height	26.8 mm[1.055 in]

Usage Conditions

Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operating Temperature (Max)	125 °C[257 °F]

Industry Standards

IP Rating	IP67
UL Flammability Rating	UL 94HB

Packaging Features

Packaging Quantity	22
Packaging Method	Tube

Other

Serviceable	Yes
Connector Position Assurance Capable	Yes

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.5% in 27519360984) Decamethylcyclopentasiloxane (D5) (.5% in 27519360984) Octamethylcyclotetrasiloxane (D4) (.5% in 27519360984) **Article Safe Usage Statements:** Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # CAT-AM7801-B128
AMPSEAL 16 Connectors Backshell



TE Part # CAT-AM7801-T618
Removal Tools — AMPSEAL 16



TE Part # CAT-AM7801-CH8172
AMPSEAL 16 Housings



TE Part # 2272179-3
AMPSEAL 16 PERIPHERAL SEAL 4P - SERVICE



TE Part # CAT-AI5-ACB16
AMPSEAL 16 Coaxial Backshells




TE Part # 776363-1
SEALING PLUG, SZ 16 CAVITY



TE Part # CAT-AM7801-T273
AMPSEAL 16 CONTACTS


Also in the Series | AMPSEAL 16

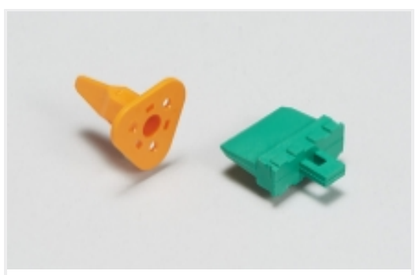

Automotive Connector Locks & Position Assurance(6)



Automotive Seals & Cavity Plugs(11)

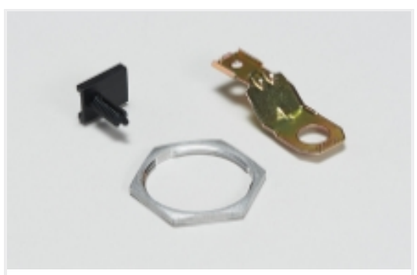


Other Automotive Connector Accessories(8)

Customers Also Bought



TE Part #HPP816E056
TRICAN 24V HTD2800P1B11C6STD

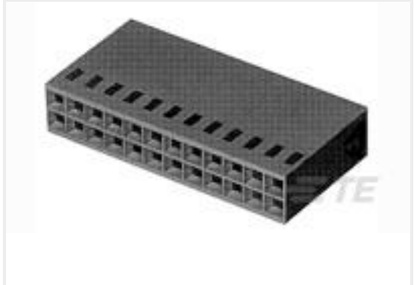


TE Part #4-87456-9
04 MODIV HSG COMP DR .100CL




TE Part #CAT-AM7801-T273
AMPSEAL 16 CONTACTS



TE Part #CAT-AM7801-CH8172
AMPSEAL 16 Housings



TE Part #1625862-8
RH73 2B 10G 10% 1000PPM 1K RL

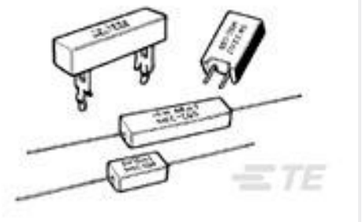

TE Part #2-1879068-5
SQB40 150R 5% (WIRE) 6.35MM FASTON



TE Part #2292799-1
AS16,PLUG BACKSHELL KIT,ST,04P, SMOOTH

Documents

Product Drawings

AS16,PLUG ASSY,ST,04P,N SEAL,CODE D

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_776487-4_E_c-776487-4-e.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_776487-4_E_c-776487-4-e.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_776487-4_E_c-776487-4-e.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English