





THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0511	2010/11/29	Ivan	Change View.
C	LEN1540241~44	2015/03/11	Jinhai	Change Logo LTW To ALTW

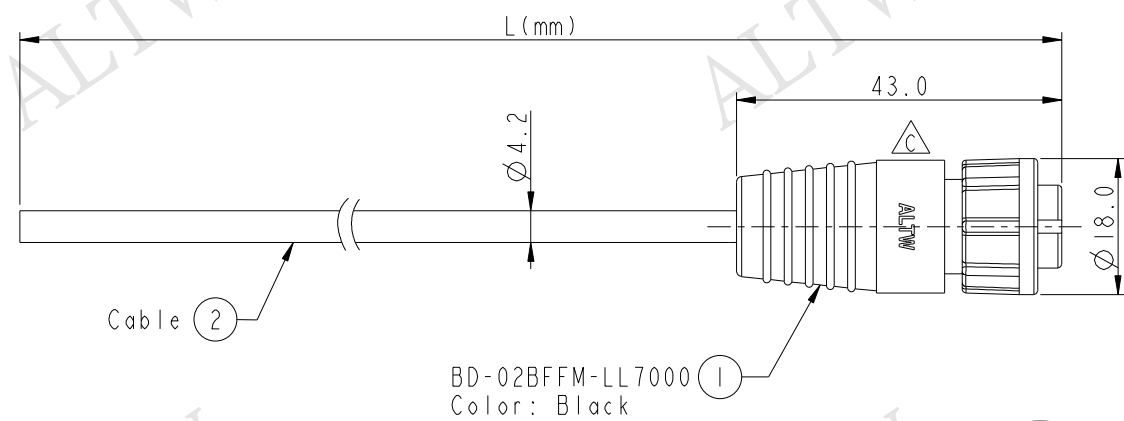

- Note:
- * (CC) Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * O-Ring: EPDM, Black
 - * Lock Nut: Nylon+GF, Black
 - * Cable: UL2464 24AWG*2C+D+AL/My PVC Jacket UV Resistant, OD=4.2, Black.
 - * Cable Length Tolerance: 01M:40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



Pin Assignments
Front View

2	Red	紅
1	Black	黑
Conn.	Wire Color	
	Pin Out	

BD-02BFFM-LL7A XX
XX : 01~99Meters
01 : 01Meter
02 : 02Meters
...
99 : 99Meters
Cable Length(L): 01~99Meters

UNIT:mm	TITLE Standard Cable Lock 2Pin F Conn F Pin		
TOLERANCE ±0.5mm	SCALE 1:1	SIZE A4	SHEET 1 OF 1
	REV. C	WC-REV. A.1	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Jinhai	DATE 2015-03-11
DWG NO BD-02BFFM-LL7AXX	CHECKED BY Tom	DATE 2015-03-11
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2015-03-11