Pushing Performance

# ix Type A 4x2xAWG26/7 PUR 15m

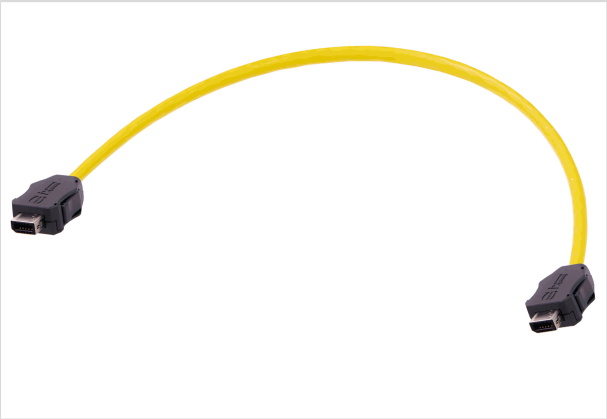


Image is for illustration purposes only. Please refer to product description.

| | |
|---|---|
| Part number | 33 48 010 1804 150 |
| Specification | ix Type A 4x2xAWG26/7 PUR 15m |
| HARTING eCatalogue | https://b2b.harting.com/33480101804150 |

## Identification

| | |
|---|---|
| Category | System cabling |
| Series | HARTING ix Industrial® |
| Element | Cable assemblies |
| Specification | Pre-assembled on both sides |
| Connector 1 | HARTING ix Industrial® Type A |
| Connector 2 | HARTING ix Industrial® Type A |
| Type of cable | Copper cable (round) |

## Version

| | |
|---|---|
| Cable length | 15 m |
| Termination method | IDC termination |
| Number of cores | 8 |
| Core structure | 4x 2x AWG 26/7 |
| Coding | Type A |

## Technical characteristics

| | |
|---|---|
| Limiting temperature | -40 ... +80 °C unmoved<br>-40 ... +80 °C moved |
| Transmission characteristics | Cat. $6_A$ Class $E_A$ up to 500 MHz |


HARTING Customised Solutions GmbH & Co. KG | In der Tütenbeke 22 | 32339 Espelkamp | Germany
Phone +49 5772 47-0 | info@HARTING.com | www.HARTING.com

Pushing Performance

## Technical characteristics

| | |
|---|---|
| Data rate | 10 Mbit/s |
| | 100 Mbit/s |
| | 1 Gbit/s |
| | 2.5 Gbit/s |
| | 5 Gbit/s |
| | 10 Gbit/s |

## Material properties

| | |
|---|---|
| Material (cable) | PUR (polyurethane) |
| Colour (cable) | Yellow |

## Specifications and approvals

| | |
|---|---|
| Specifications | IEC 60332-1-2 Flame retardancy |
| | IEC 60754-1 Halogen freeness |
| | EN 60811-404 Oil resistance |
| | UN/ECE-R 118 fire protection for rolling stock |

## Commercial data

| | |
|---|---|
| Packaging size | 1 |
| Country of origin | Latvia |
| European customs tariff number | 85444290 |
| eCl@ss | 27060390 Ready-made data cable (unspecified) |


HARTING Customised Solutions GmbH & Co. KG | In der Tütenbeke 22 | 32339 Espelkamp | Germany
Phone +49 5772 47-0 | info@HARTING.com | www.HARTING.com